
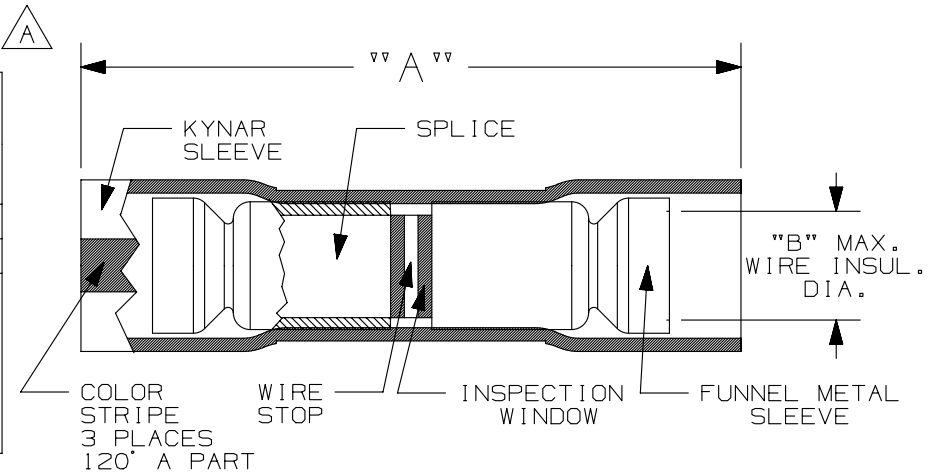




THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT PART #	WIRE RANGE	COLOR CODE	DIMENSIONS in.[mm]		INSTALLATION TOOL
			A ±.03 [0,8]	B	
BSK18	22-18	RED	1.12 [28,45]	.136 [3,45]	CT-400
BSK14	16-14	BLUE	1.12 [28,45]	.162 [4,11]	CT-400, CT-460
BSK10  LISTED 587H E52164	12-10	YELLOW	1.24 [31,50]	.225 [5,72]	CT-460



NOTE:

- BSK10: cULus LISTED FOR US AND CANADA
 A. 600V MAX. VOLTAGE RATING
 B. 302°F (150°C) MAX. TEMP. RATING
 C. SOLID, STRANDED, AND INTERNAL (CLASS K) COPPER WIRE
- MATERIAL:
 A. STAMPING (22-18 & 16-14) - .03" THK COPPER, TIN PLATED
 B. STAMPING (12-10) - .04" THK COPPER, TIN PLATED
 C. METAL SLEEVES- BRASS, TIN PLATED
 D. HOUSING- KYNAR
- DIMENSIONS IN BRACKETS ARE MILLIMETERS
- WIRE STRIP LENGTH: 3/8 ^{+1/32-0} (9.5 ^{+.8-0})
- PACKAGE QUANTITY:
 SEE www.panduit.com
 FOR PART NUMBER SUFFIX DESIGNATION
 FOR PACK SIZE
- KYNAR IS A REGISTERED TRADEMARK OF ARKEMA.

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN	TITLE	MATERIAL:	DRAWING NUMBER:	SIZE		
							KYNAR BUTT SPLICES BSK18,BSK14,BSK10					
							CUSTOMER DRAWING					
3	07-02-13	JBN	TMR	RTFI	D. REVISED NOTE #1 AND CHANGED UL LISTED TO BSK10 ONLY	N41754BA-DC	ITEM REVISION NAME N41754BA/00					
--	---	--	--	--	C. UPDATED UL LOGO	---	DATASET FILE NAME N41754BA_DC/00D					
2	8-15-12	JAHA	LSM	LCA	B. REMOVE LINE #4 FROM NOTE A. ADDED COLUMN TO TEXT BOX	N41754BA-DC	UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm]	SEE NOTE				
1	05-21-12	JAHA	LSM	LCA	RELEASED TO PRODUCTION	N41754BA-DC	.x ± .1 [2.54] .xxx ± .005 [.127] .xx ± .01 [.25] ANGLES ± 5 °					
R	03-01-12	JAHA	LSM		DRAWING RELEASED				A41754			
							DRAWN BY JAHA	DATE 03-01-12	CHK LSM	SCALE NONE	SHT 1 OF 1	A

D101000DA/12