






Max. Temperature : 260° during 10 seconds

D	09551563622.741	1	4-40 UNC	Black Insulator	Reel Packaging (140 connectors) see page 2/2	EC02316	30Aug2010	ED	Detail.	28Aug2009	ED	 All Dim. in mm Orig. Size DIN A 4	D-SUB SMT Standard Female 9p with die casted grounds and unremovable screwlocks	Maßstab/ Scale 1,5:1
	09551566622.741	2				EC01754	30Apr2010	ED	Insp.					
	09551567622.741	3							Stand.					
	09551563621.741	1	M3			EC01199	11Jan2010	ED	HARTING EURL F-95972 Paris				TB 09 55 156 x62x	Blatt/ Page 1 / 2
	09551566621.741	2				EC00775	28Aug2009	ED						
	09551567621.741	3												
	Part number	PL	Thread	Index designation	Mod.	Dot.	Name				Sub.			

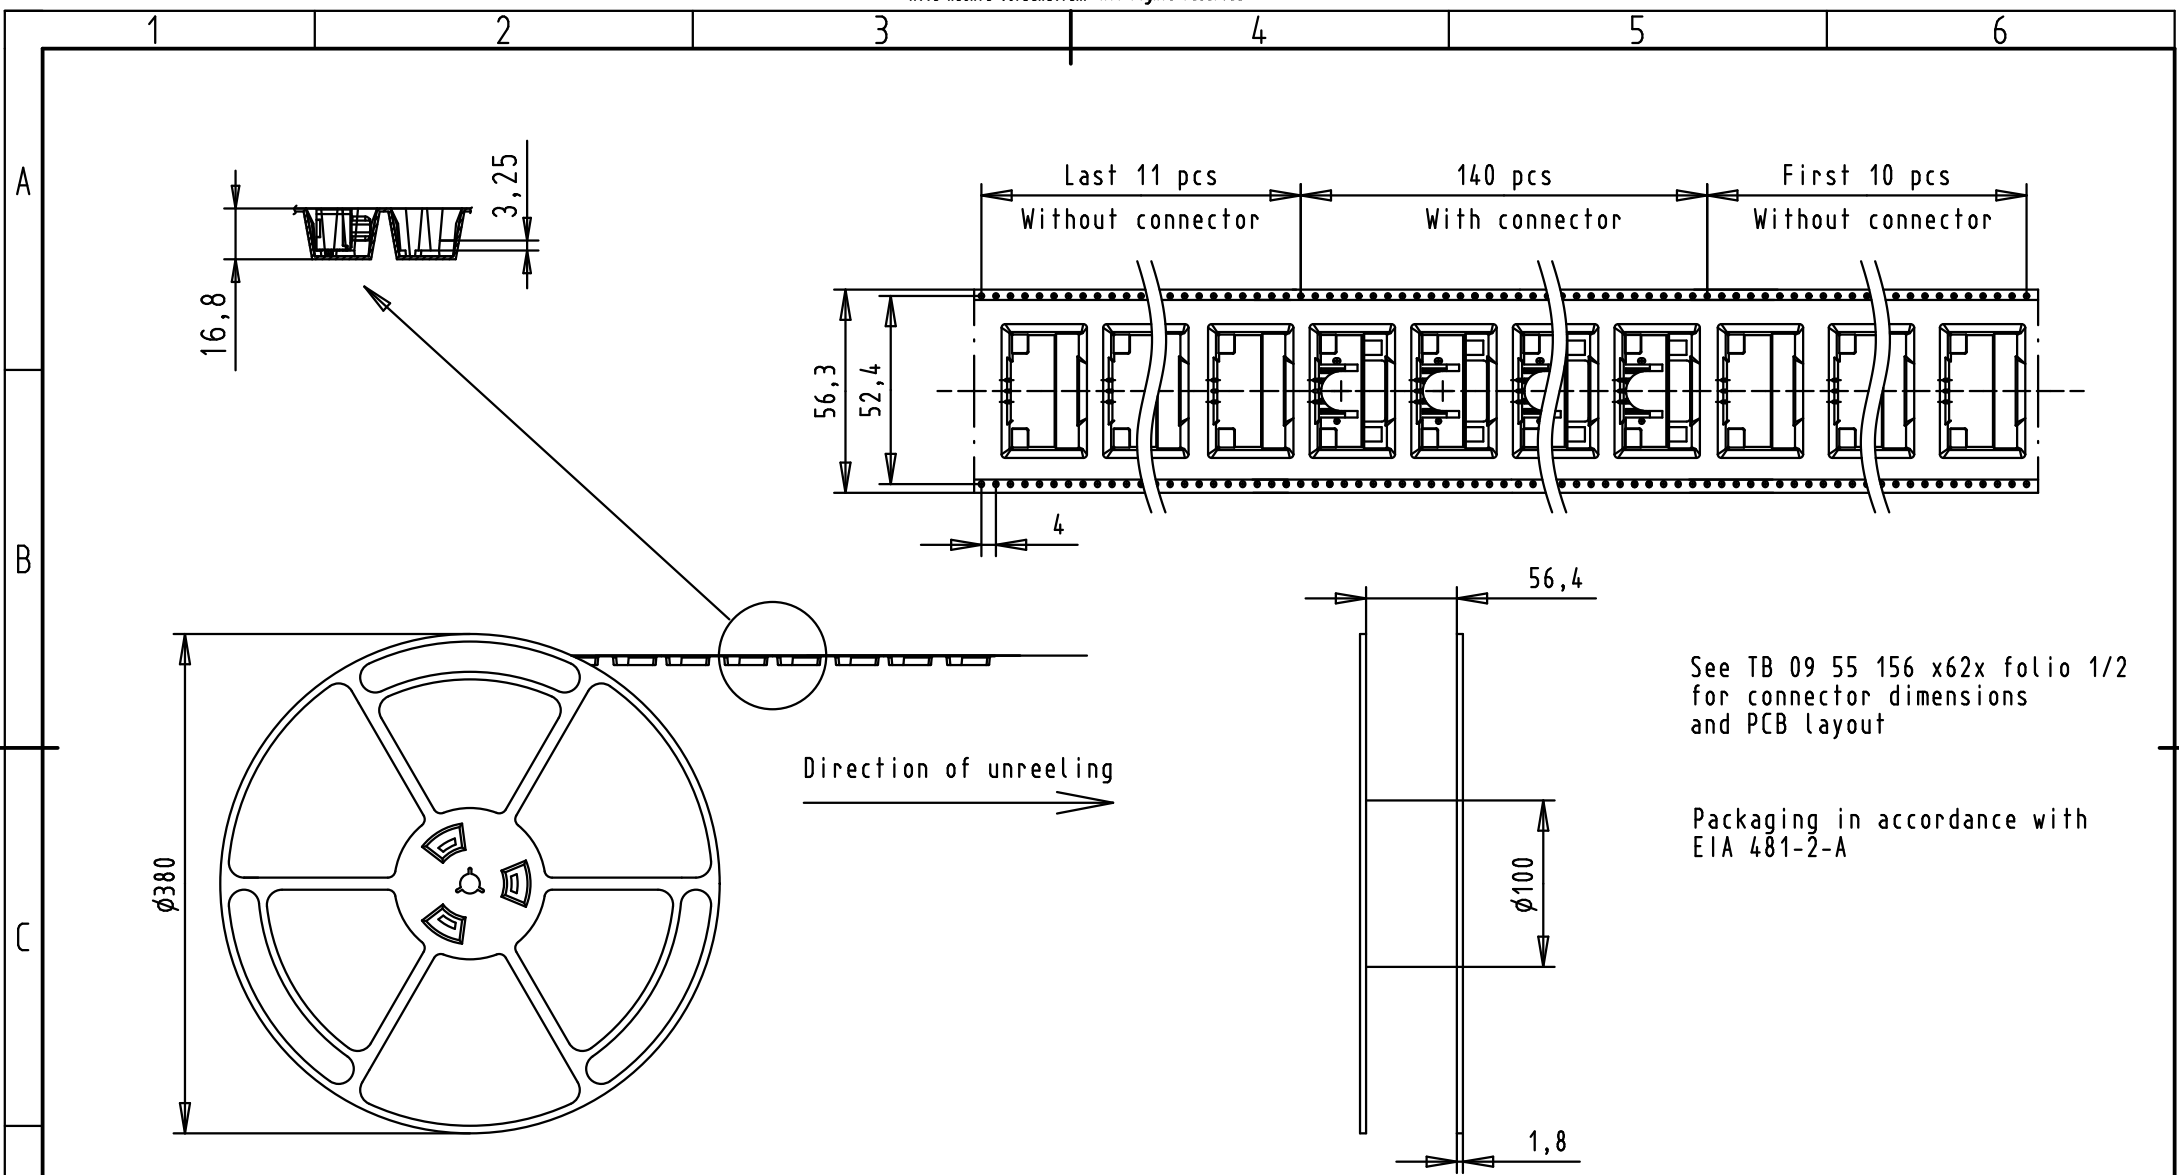

See TB 09 55 156 x62x folio 1/2 for connector dimensions and PCB layout

Packaging in accordance with EIA 481-2-A

D	09551563622.741	1	4-40 UNC	Black Insulator	Reel Packaging (140 connectors)				Dot.	Name	 All Dim. in mm Orig. Size DIN A 4	D-SUB SMT Standard Female 9p with die casted grounds and unremovable screwlocks	Maßstab/ Scale	
	09551566622.741	2						Detail.	28Aug2009	ED				
	09551567622.741	3						Insp.						
	09551563621.741	1	M3					Stand.			HARTING EURL F-95972 Paris		TB 09 55 156 x62x	Blatt/ Page 2 / 2
	09551566621.741	2						EC02316	30Aug2010	ED				
	09551567621.741	3						EC01199	11Jan2010	ED				
	Part number	PL	Thread	Index designation	Mod.	Dot.	Name			Sub.				