


**Power Relay F7**

- Pin assignment similar to ISO 7588 part 1
- Customized versions on request
  - 24VDC versions with contact gap >0.8mm
  - Integrated components (e.g. resistor, diode)
  - Customized marking/color
  - Special covers (e.g. notches, release features, brackets)

Typical applications

Cross carline up to 70A for example: ABS control, cooling fan, energy management, engine control, glow plug, heated front screen, ignition, lamps: front, rear, fog light, main switch/supply relay.

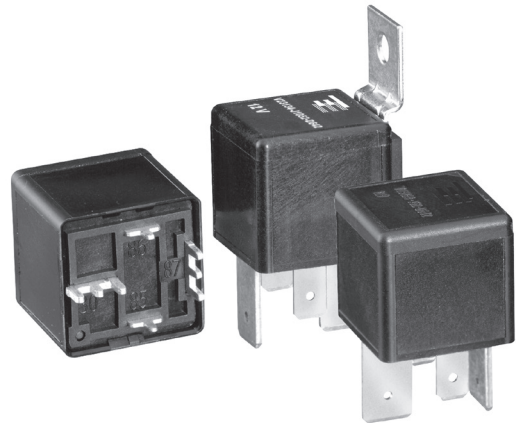

F134J\_a\_bw

**Contact Data**

Contact arrangement	1 form A, 1 NO	1 form A, 1 NO	1 form A, 1 NO
Contact gap	–	–	>0.8mm
Rated voltage	12VDC	24VDC	24VDC <sup>1)</sup>
Limiting continuous current			
23°C	70A	70A	70A
85°C	50A	50A	50A
125°C	30A	30A	30A
Limiting making current <sup>2)</sup>	240A	240A	240A
Limiting breaking current	70A	25A	40A
Limiting short-time current overload current, ISO 8820-3 <sup>3)</sup>		1.35 x 50A, 1800s 2.00 x 50A, 5s 3.50 x 50A, 0.5s 6.00 x 50A, 0.2s	
Jump start test, ISO 16750-1		24VDC for 5min, conducting nominal current at 23°C	
Contact material		Silver based	
Min. recommended contact load <sup>4)</sup>		1A at 5VDC	
Initial voltage drop, form A (NO) contact at 10A, typ./max.		10/300mV	
Frequency of operation at nominal load		6 ops./min (0.1Hz)	
Operate/release time typ.		7/2ms <sup>5)</sup>	
Electrical endurance <sup>6)</sup>			
resistive load at 14VDC	>1x10 <sup>5</sup> ops. 70A >2x10 <sup>5</sup> ops. 50A	–	–
resistive load at 28VDC	–	>1x10 <sup>5</sup> ops. 25A	>1x10 <sup>5</sup> ops. 40A

**Contact Data (continued)**

Mechanical endurance	>1x10 <sup>6</sup> ops.
1) Special high performance 24VDC version with contact gap >0.8mm.	
2) The values apply to a resistive or inductive load with suitable spark suppression and at maximum 14VDC for 12VDC or 28VDC for 24VDC load voltages. For a load current duration of maximum 3s for a make/break ratio of 1:10.	
3) Current and time are compatible with circuit protection by a typical automotive fuse. Relay will make, carry and break the specified current.	
4) See chapter Diagnostics of Relays in our Application Notes or consult the internet at <a href="http://relays.te.com/appnotes/">http://relays.te.com/appnotes/</a>	
5) For unsuppressed relay coil. Any parallel device to the coil will increase the release time.	
6) Electrical endurance data is not valid for diode versions. Any diode or pn-junction parallel to the coil (internal or external) will significantly decrease the electrical lifetime, especially when used for inductive loads.	

**Coil Data**

Rated coil voltage	12VDC, 24VDC
--------------------	--------------

**Coil versions, DC coil**

Coil code	Rated voltage VDC	Operate voltage VDC	Release voltage VDC	Coil resistance <sup>7)</sup> Ω±10%	Rated coil power <sup>7)</sup> W
052	12	7.2	1.6	90	1.6
053	24	14.4	3.2	324	1.8
065	24	14.4	2.4	288	2.0
165	24	16.0	4.0	288	2.0

7) Without components in parallel.


All figures are given for coil without pre-energization, at ambient temperature +23°C.

**Max. DC load breaking capacity**



Load limit curve: safe shutdown, no stationary arc/make contact.  
Load limit curve measured with low inductive resistors verified for 1000 switching events.

**Coil operating range**

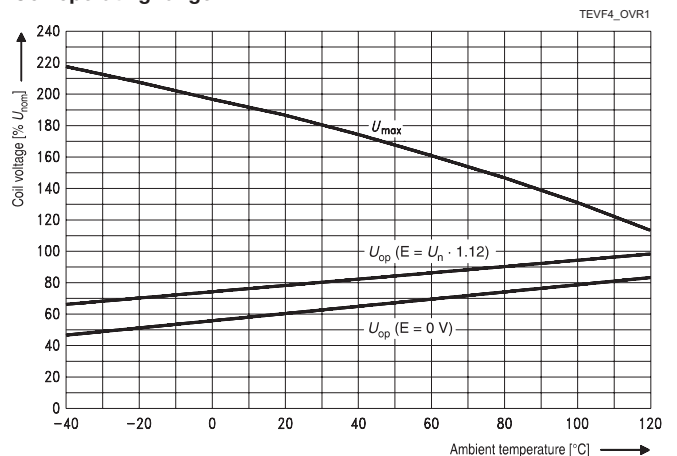

Does not take into account the temperature rise due to the contact current  
E = pre-energization.







**Power Relay F7 (Continued)**

**Dimensions (continued)**

Power Relay F7 with PCB terminals

View of the terminals (bottom view)

Mounting hole layout (bottom view)

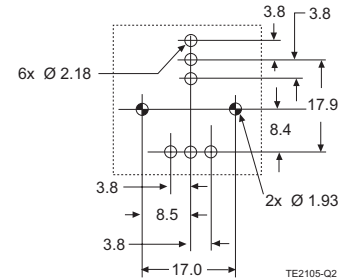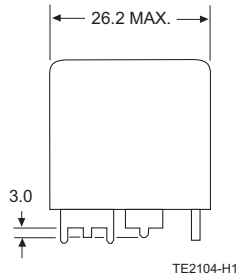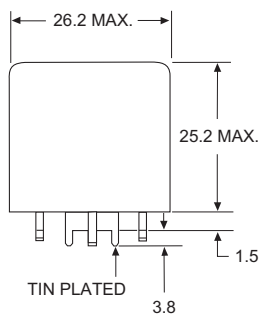

**Product code structure**

Typical product code **V23134 -J 0 052 -D642**

<b>Type</b>	<b>V23134</b> Power Relay F	
<b>Contact arrangement</b>	<b>J</b> 1 form A, 1 NO	
<b>Cover</b>	<b>0</b> Standard	<b>1</b> Bracket at terminal 30 ISO
	<b>2</b> Bracket near terminal 86 ISO	
<b>Coil</b>	<b>052</b> 12VDC	<b>053</b> 24VDC
	<b>165</b> 24VDC	<b>065</b> 24VDC
<b>Terminal/arrangement</b>	<b>D642</b> Plug-in/NO	
	<b>Xnnn</b> Customized (nnn: version number)	

**Production in Europe (only)**

Product code	Arrangement	Cover	Coil suppl.	Circuit <sup>1)</sup>	Coil	Contact mat.	Terminals	Part number
V23134-J0052-D642	1 form A, 1 NO	Standard		NO	12VDC	Silver based	Plug-in, QC	7-1393303-3
V23134-J0052-X429			Resistor 680Ω	NOR				1-1414147-0
V23134-J0052-X439			Diode (cathode 86)	NOD				1-1414286-0
V23134-J0052-X455			Resistor 470Ω	NOR			PCB	1-1414610-0
V23134-J0052-X511				NO				3-1415001-2
V23134-J0052-X461 <sup>3)</sup>			Resistor 560Ω	NOR			Plug-in, QC	1-1414469-0
V23134-J0053-D642				NO	24VDC			9-1393303-7
V23134-J0065-X497 <sup>4)</sup>							PCB	3-1414937-3
V23134-J0165-X537 <sup>2)3)</sup>			Resistor 1200Ω	NOR			Plug-in, QC	3-1904117-4
V23134-J1052-D642		Bracket		NO	12VDC			0-1393304-9
V23134-J1052-X281			Resistor 560Ω	NOR				1-1393304-0
V23134-J1053-D642				NO	24VDC			1-1393304-1
V23134-J2165-X538 <sup>2)3)</sup>			Resistor 1200Ω	NOR				3-1904117-5

1) See terminal assignment diagrams.  
 2) Special feature: contact gap >0.8mm.  
 3) Special feature: 14.5mm load terminals.  
 4) Packed in tray with 300 pcs. per unit.  
 Other types on request.  
 This list represents the most common types and does not show all variants covered by this datasheet.

**Production in Asia (only)**

Product code	Arrangement	Cover	Coil suppl.	Circuit <sup>1)</sup>	Coil	Contact mat.	Terminals	Part number
V23134-J0052-D642	1 form A, 1 NO	Standard		NO	12VDC	Silver based	Plug-in, QC	7-1904094-7
V23134-J0052-X429			Resistor 680Ω	NOR				7-1904094-8
V23134-J0052-X439			Diode (cathode 86)	NOD				7-1904094-9
V23134-J0052-X461 <sup>3)</sup>			Resistor 560Ω	NOR				8-1904094-0
V23134-J0053-D642				NO	24VDC			8-1904094-3

1) See terminal assignment diagrams.  
 2) Special feature: contact gap >0.8mm.  
 3) Special feature: 14.5mm load terminals.  
 Other types on request.  
 This list represents the most common types and does not show all variants covered by this datasheet.