



10 9 8 7 6 5 4 3 2 1

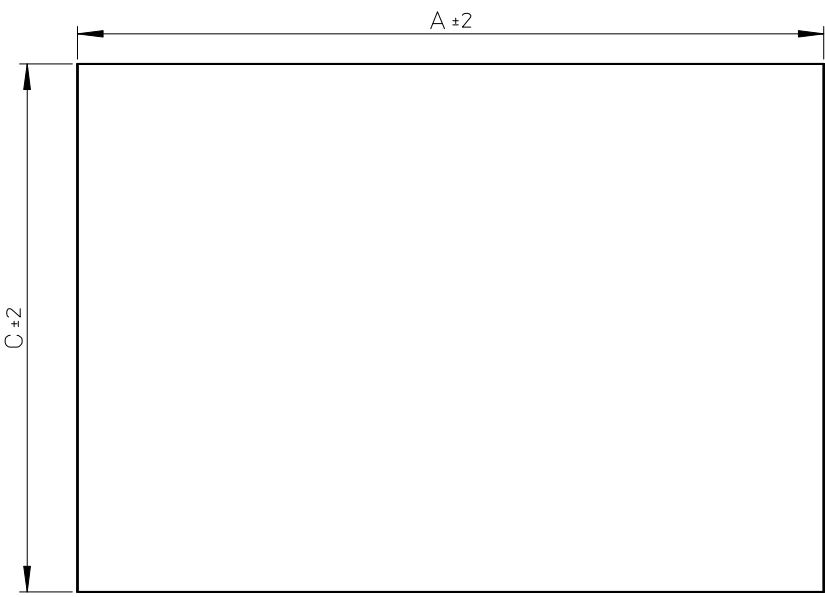


NOTES:

1. 材料 MATERIAL  
PS-504800-001 参照  
SEE PS-504800-001
2. ELV & RoHS 適合品  
ELV & RoHS COMPLIANT
3. UL94 V-0 相当  
UL94 V-0 EQUIVALENT
4. 製品番号 504800  
PRODUCT No.



5. シートの電気特性や機械特性については PS-504800-001 を参照  
ELECTRICAL & MECHANICAL PROPERTY : SEE PS-504800-001

DETAIL 1

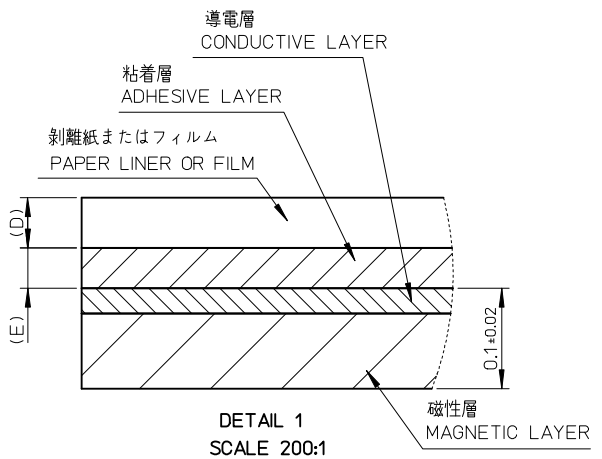

DETAIL 1  
SCALE 200:1

◎ 耐リフロー粘着剤 REFLOW COMPATIBLE ADHESIVE	5048007003
◎ 標準粘着:再剥離可能タイプ STANDARD ADHESIVE : RE-STICKABLE TYPE	5048007001
◎ 粘着無し W/O ADHESIVE	5048007000
粘着層特徴 ADHESIVE FEATURE	ORDER NO.

◎ 19.08g	0.030	0.07	210	297	5048007003	50480070**
22.20g	0.047	0.105	210	297	5048007001	
11.85g	-	-	210	297	5048007000	
WEIGHT	E	D	C	A	ORDER NO.	MODEL NO.

REVISED EC NO: J2015-0054 DRWN: NIITA 2014/04/04 CHKD: APPR: KCHIKANO 2014/07/11	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE 1:2	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION
	10 UNDER	± 0.2	DRAWN BY MNIITA	DATE 2013/09/25	HOZOX TWO LAYER NOISE SUPPRESSION SHEET <b>molex</b> DOCUMENT NO. SD-504800-003 SHEET NO. 1 OF 1		
	10 OVER 30 UNDER	± 0.25	CHECKED BY SHOSHIKAWA	DATE 2013/09/27			
	30 OVER	± 0.3	APPROVED BY SHOSHIKAWA	DATE 2013/10/01			
ANGULAR	± 1 °	MATERIAL NO.	SEE TABLE				
	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SIZE A3	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION			

9 8 7 6 5 4 3 2