

**60760 PRODUCT DETAILS**

<i>Property</i>	<i>Details</i>
<i>Height</i>	1.00 in (25.4 mm)
<i>Width</i>	3.25 in (82.55 mm)
<i>Perimeter</i>	22.50 in
<i>Weight</i>	1.3 lb per foot 1.93 kg per meter)
<i>Material</i>	6063-T5 Aluminum Extrusion Alloy

Aavid reserves the right to make changes to the products or information contained herein without notice. No liability is assumed as a result of their use or applications. For additional information, please contact Aavid directly.




**THERMAL DATA**

Natural Convection: 3.11 based on 70 C temp rise above ambient.

Thermal resistance is calculated based on a single 1" (25.4mm) square heat source centered on the heat sink. If you have distributed loads, then you can expect 10% better performance in natural convection and 20% better performance in forced convection.

**Natural Convection**

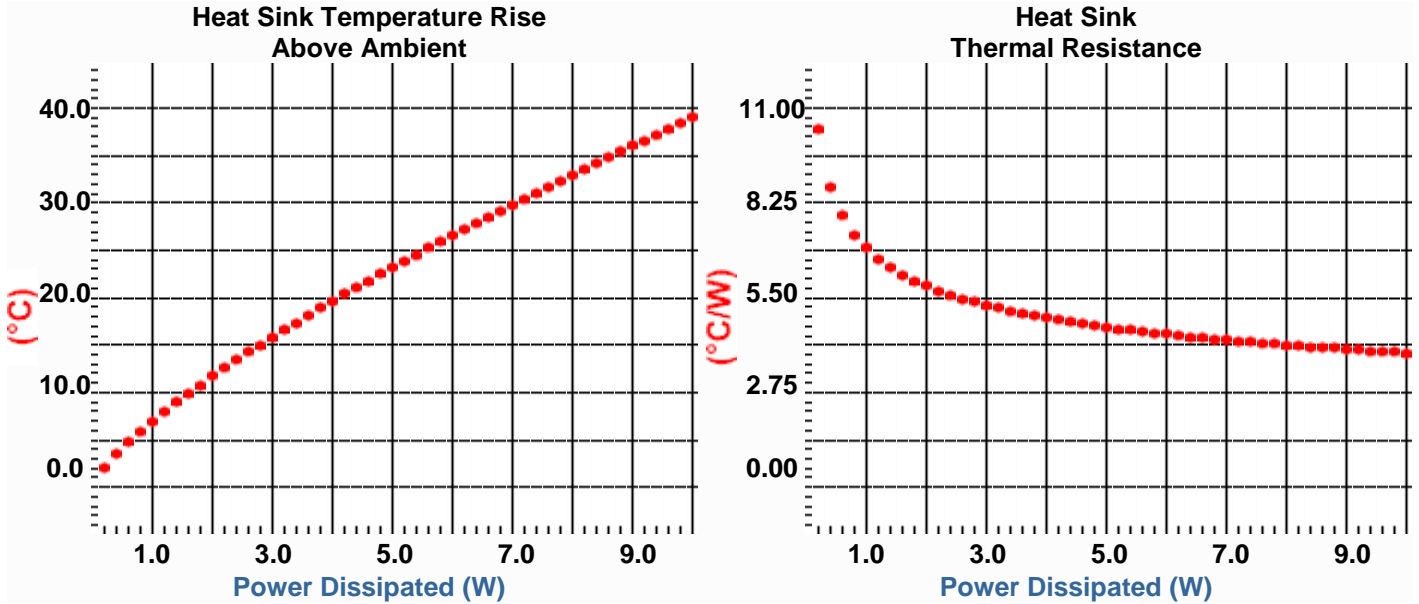

**Forced Convection**

