
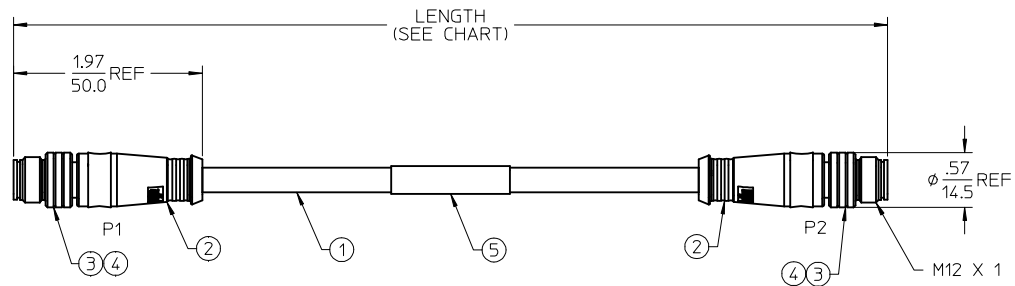
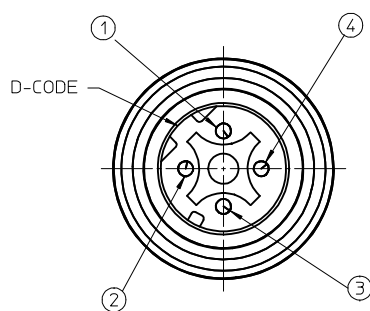


MATERIAL NUMBER	ENGINEERING NO.	LENGTH
1300480088	E11A06003M010	3'3" +1.75 - 0 [1M +44.5MM - 0]
1300480090	E11A06003M050	16'4" +6.0 - 0 [5M +150.0MM - 0]



P1		P2	
1	ORANGE	1	
2	BLUE	2	
3	OR/WHITE	3	
4	BLUE/WHITE	4	

WIRING DIAGRAM

- NOTES:
- 1) MATERIAL: SEE TABLE
 - 2) FINISHES: SEE TABLE
 - 4) MATES WITH: MICRO CHANGE, 4 POLE RECEPTACLE
 - 5) ELECTRICAL DATA:
 ACCORDING TO CAT5e ETHERNET STANDARD
 INLINE CORDSET
 MALE D-CODING TO MALE D-CODING
 24AWG
 POLES: 4
 MAX. VOLTAGE: 250V
 MAX. CURRENT 4A
 CONTACT RESISTANCE: <5m Ohm
 INSULATION WITHSTAND: >100M Ohm
 TEMPERATURE RANGE: -25°C TO 75°C
 PROTECTION IP67
 UL E200650
 - 6) PACKAGING:
 CABLE ASSEMBLIES ARE BAGGED SEPERATELY
 IN POLY BAGS WITH BAR CODE LABEL ATTACHED
 TO OUTSIDE OF BAG.
 - 7) ASSEMBLY IS RoHS COMPLIANT.

SALES DRAWING

ITEM	QTY.	DESCRIPTION	MATERIAL	FINISH
5	1	LABEL	PLASTIC FILM	BLACK/YELLOW
4	8	MALE TERMINAL	COPPER ALLOY	GOLD PLATED
3	2	M12 ULTRA LOCK HEAD ASSY	TPE	BLACK
2	2	OVERMOLD	PUR	BLACK
1	1	ETHERNET CABLE-CAT5e	PVC JACKET	TEAL

RELEASE DWG
 EC NO: WNA2009-0650
 DRAWN: RUPERT 2009/04/02
 CHKD: WOODMAN
 APPR: J. MURPHY 2009/04/08

QUALITY SYMBOLS
 ▽=0
 ▽=0

DESCRIPTION
 A

GENERAL TOLERANCES (UNLESS SPECIFIED)

	mm	INCH
4 PLACES ±	---	---
3 PLACES ±	---	±.020
2 PLACES ±	0.51	---
1 PLACE ±	---	---

ANGULAR ± 1°

DRAFT WHERE APPLICABLE
 MUST REMAIN
 WITHIN DIMENSIONS

DIMENSION STYLE		SCALE	DESIGN UNITS
IN/MM		1:1	INCH

DRAWN BY	DATE	CHECKED BY	DATE
B. RUPERT	04/01/09	WOODMAN	04/01/09
MURPHY	04/01/09		

THIRD ANGLE PROJECTION

MIC 4P M/MP
 ST/ST D-CODED

MOLLEX MOLEX INCORPORATED

MATERIAL NO. 1300480088
 DOCUMENT NO. SD-130048-088

SHEET NO. 1 OF 1

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION