

"High Frequency Ceramic Solutions"

2450 / 5400 MHz Diplexer (LPF / BPF)

P/N 2450DP15F5400

Detail Specification: 06/05/06

Page 1 of 2

General Specifications

Part Number	2450DP15F5400		
Attenuation in Low Band Path	* 0.7 dB max.@ 2.4 ~ 2.5 GHz	18 dB min. @ 4.8 ~ 6.0 GHz	18 dB min. @ 7.2 - 7.5 GHz
Attenuation in High Band Path	* 1.0 dB max.@ 4.9 ~ 5.9 GHz	19 dB min. @ 1.8 ~ 2.5 GHz	25 dB ref. @ 10.3 - 10.7 GHz


Input Power	3 Watts max.
Impedance	50 Ω
Operating Temp	-40 to +85°C
Storage Temp	-40 to +85°C
Reel Quantity	4000

Pass-band Return Loss In Both Bands	9.5 dB min.
--	-------------


* Note: The I.L. parameters are based on probed & TRL cal'd measurement

Mechanical Dimensions

	In	mm
L	0.079 ± 0.004	2.00 ± 0.10
W	0.049 ± 0.004	1.25 ± 0.10
T	0.022 ± 0.004	0.55 ± 0.10
a	0.012 ± 0.004	0.30 ± 0.10
b	0.008 ± 0.004	0.20 ± 0.10
c	0.012 +.004/-0.008	0.30 +0.1/-0.2
g	0.014 ± 0.004	0.35 ± 0.10
p	0.026 ± 0.002	0.65 ± 0.05

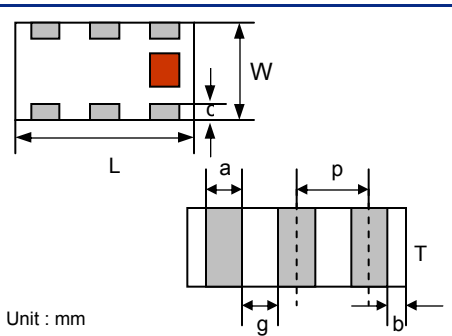





Terminal Configuration	
No.	Function
1	Lower Freq. Port (P1)
2	GND
3	Higher Freq. Port (P3)
4	GND
5	Common Port (P2)
6	GND



Mounting Considerations

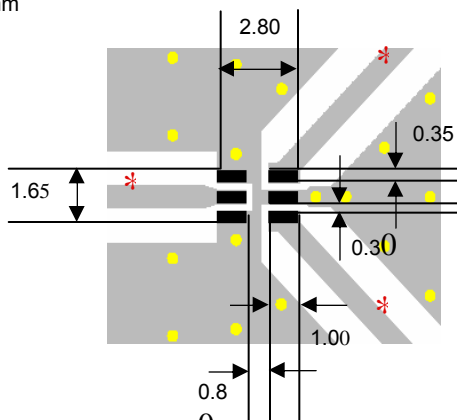Mount these devices with brown mark facing up.
Line width should be designed to provide 50Ω impedance matching characteristics.
Units: mm



-  Solder Resist
-  Land
-  Through-hole (φ0.35)

Johanson Technology, Inc. reserves the right to make design changes without notice.
All sales are subject to Johanson Technology, Inc. terms and conditions.

"High Frequency Ceramic Solutions"


2450 / 5400 MHz Diplexer (LPF / BPF)

P/N 2450DP15F5400

Detail Specification: 06/06/05

Page 2 of 2

Typical Electrical Performance (T=25°C)

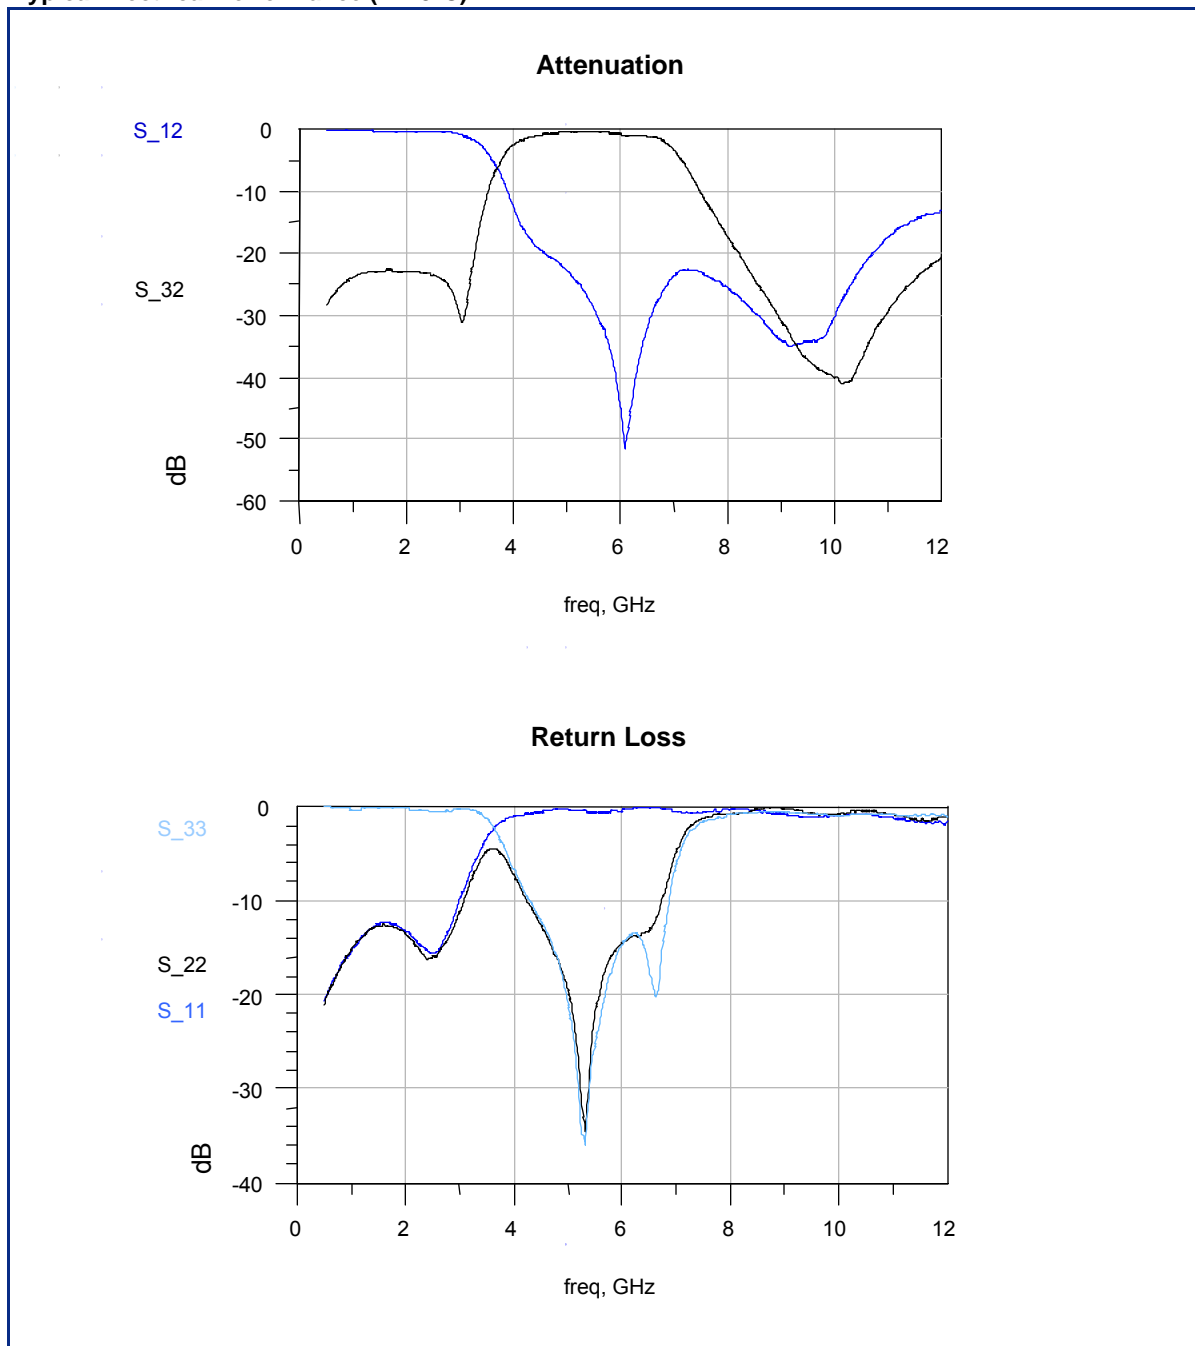

Johanson Technology, Inc. reserves the right to make design changes without notice.

All sales are subject to Johanson Technology, Inc. terms and conditions.



www.johansontechnology.com

931 Via Alondra • Camarillo, CA 93012 • TEL 805.389.1166 FAX 805.389.1821

2003 Johanson Technology, Inc. All Rights Reserved