


| | |
|------------------------|---------------------------------------|
| LEAD FINISH: SILVER | |
| BUSHING FINISH: SILVER | |
| CAPACITANCE | 7000pF GMV |
| TEMP. RANGE | -55°C TO 125°C |
| CURRENT | 5 AMP MAX. |
| WORKING VOLTAGE | 85°C -- VDC MAX. 125°C 50 VDC MAX. |
| D.C. RESISTANCE | 0.1ohms MAX. |

| | |
|---|-----------|
| MIN. I.L. PER MIL-STD-220 AT 25°C NO LOAD | |
| FREQ. MHz | I.L. (db) |
| 3 | - |
| 10 | 14 |
| 30 | - |
| 100 | 70 |
| 300 | 70 |
| 1 GHz | 70 |

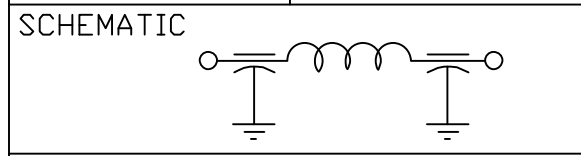

MARKING:

PART: API 312 (FAIRVIEW)
 API 312M (MEXICO)

BAG:
 51-729-312
 DATE CODE
 QTY./BAG (50 MAX.)

| | | | | | | | | | |
|--|-----------|--------------|--------------|-----------|-----------------------|---------------|---------------------------------------|----------------|--------------------------|
| | 32 | 31 | 30 | 29 | 28 | REV. NID. | TOLERANCES UNLESS OTHERWISE SPECIFIED | | FAIRVIEW PENNSYLVANIA |
| | CN #21355 | CN 70197-ENG | CN 19756-CPD | CN 190752 | CN. 184953 REDRAWN | CHANGE NOTICE | Fractions ± 1/64 | | |
| | | | | | | | Dec. .xx± | Date 8-11-16 | RESIN SEAL FILTER |
| | | | | | | | Dec. .xxx± .005 | Engr. B.DEVINE | 51-729-312 |
| | | | | | | | Angles ±0° 30' | Scale NONE | |
| | | | | | | | CODE IDENT. NO. OLSP2 | | |