



MATERIALS AND FINISHES:

2.92 PLUG: SEE SD-73252-013

CABLE: TEMP-FLEX 100067-1047

LABEL: BRADY PERMASLEEVE

SHRINK TUBE: VERSAFIT OR EQUIVALENT

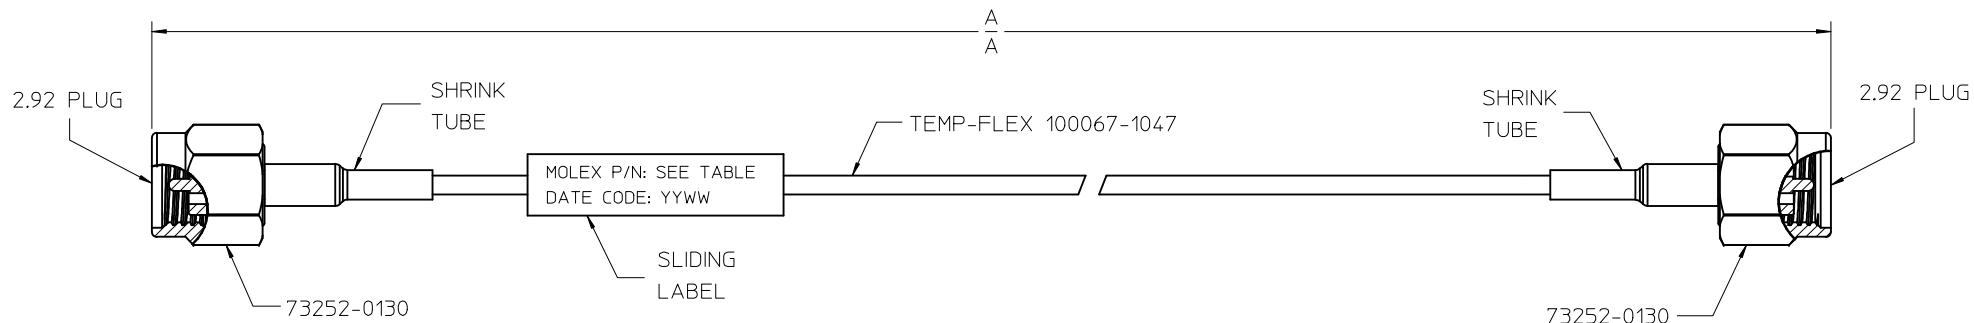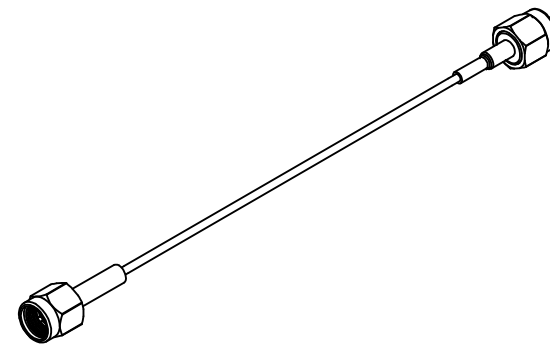

89762-1585	120.0	3048	26.2
89762-1584	18.00	457.2	4.01
89762-1583	15.00	381.0	3.36
89762-1582	12.00	304.8	2.71
89762-1581	9.00	228.6	2.25
89762-1580	6.00	152.4	1.4
PART NO.	IN	MM	INSERTION LOSS MAX TO 40 GHz (dB)
A			

VSWR 1.55 MAX TO 40 GHz

MIL-STD-348A, FIG. 323.1	INTERFACE
SPECIFICATION	DESCRIPTION

CHG: CABLE WAS TF047SC-2901. EC NO: URF2017-0286 DRWN:APRAKASHO1 2017/02/07 CHKD:BBB 2017/02/07 APPR:AROBERTSON 2017/02/17	QUALITY SYMBOLS ▽=0 ▽=0 ▽=0	GENERAL TOLERANCES (UNLESS SPECIFIED)	DIMENSION STYLE MM/IN	SCALE	DESIGN UNITS INCH	THIRD ANGLE PROJECTION
		4 PLACES ± --- ± --- 3 PLACES ± --- ± 0.010 2 PLACES ± 0.25 ± --- 1 PLACE ± --- ± --- 0 PLACE ± --- ± ---	DRAWN BY DATE AROBERTSON 2013/05/08	TITLE 2.92 PLUG ST X2 ON TEMP-FLEX 100067-1047 CA-292/292, EWR-10517		
		ANGULAR ± 2 °	CHECKED BY DATE SSS 2013/05/08	APPROVED BY DATE JW IENER 2013/05/10		
		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	MATERIAL NO. SEE TABLE	DOCUMENT NO. SD-89762-158		
B1						SHEET NO. 1 OF 1

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION