

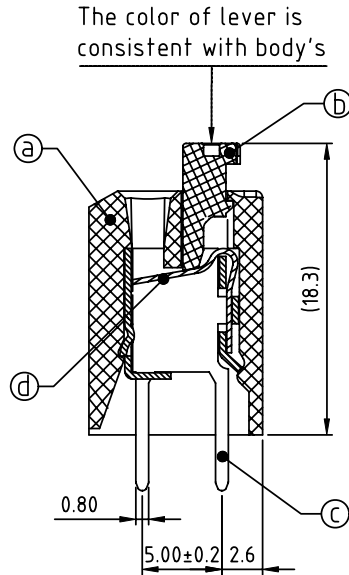
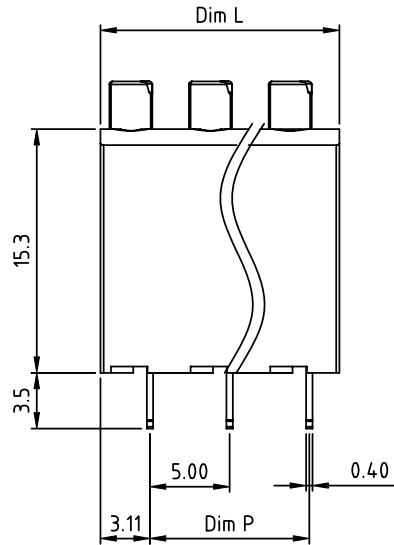


PRODUCT NUMBER	PITCH
HFxx70x100J0G	5.00mm

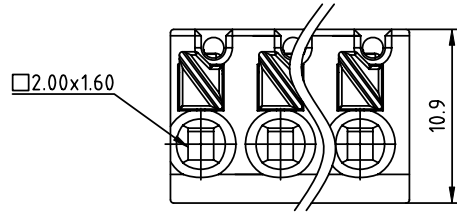

The color of lever is consistent with body's

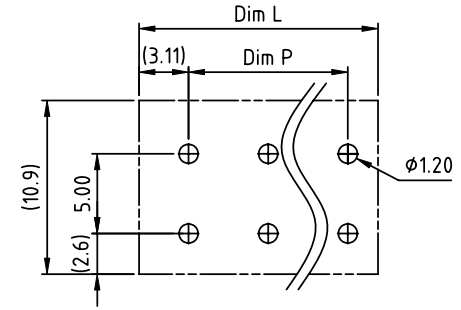

RECOMMENDED P.C.B LAYOUT
TOP VIEW

Material:

- Item (a) Insulating body: Thermoplastic (UL94V-0)
- Item (b) Insulating lever: Thermoplastic (UL94V-0)
- Item (c) Solder pin: Brass, Tin plated
- Item (d) Spring clamp: Stainless steel

Electrical cULus/VDE

- Voltage rating: 300VAC/450VAC
- Current rating: 10A/10A
- Wire range: 0.5-1.0mm²
- Solid wire(AWG): 16-20
- Stranded wire(AWG): 16-20
- Wire strip length: 8-9mm
- Withstanding Voltage: 1.6KV/2.5KV
- Operating temperature: -40°C to +115°C
- Soldering temperature: 260°C±5°C/5 Sec
- Safety Approval:

N=Number of poles
Dim L=N×5.0
Dim P=(N-1)×5.0

Poles	Tolerance
2-6p	±0.15
7-12p	±0.20
13-18p	±0.25
19-24p	±0.30

PART NO.: HF xx 70 x 100J0 G

No. of poles	Color	RoHS compliant
0	Black (RAL9005)	(lead<4%)
2	Red (RAL3001/D)	In copper Alloy
02 2 poles	3 Orange(RAL2011/P)	
03 3 poles	4 Yellow(RAL1018/A)	
...	5 Green(RAL6018/T)	
24 24 poles	6 Blue (RAL5015/A)	
	8 Grey(RAL7004/P)	
	9 White(RAL1102)	

mat'l. code		surface ASME Y14.5	tolerance ASME Y14.5	projection	product family TERMINAL BLOCK
ltr	ecn no	dr	date		title TERMINAL BLOCK
				MM	scale
					sheet 1 of 1 size
				dr	sheet 1 of 1 size
				enr	sheet 1 of 1 size
				chr	sheet 1 of 1 size
				appd	sheet 1 of 1 size
					sheet 1 of 1 size
				sheet index	sheet 1
				revision	A
				sheet	1