


NOTES:

1. HARDWARE IS INCLUDED.
2. THIS IS A LEAD FREE PRODUCT
3. MAX REFLOW IS 245°C FOR 5 SEC.

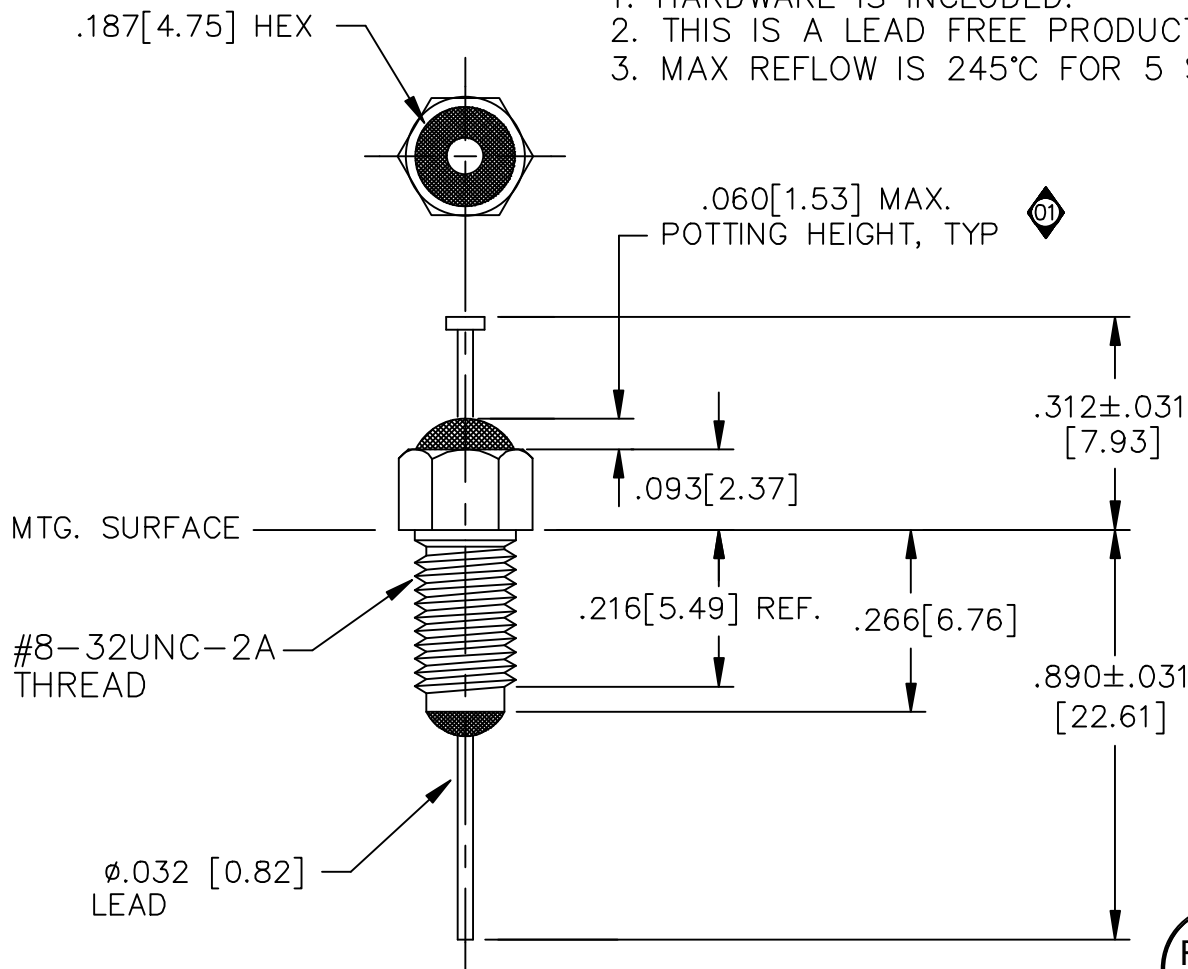

LEAD FINISH: SILVER	
BUSHING FINISH: SILVER	
CAPACITANCE	3000pF GMV
TEMP. RANGE	-55°C TO 125°C
CURRENT	10 AMP MAX.
WORKING VOLTAGE	125°C 200 VDC MAX.
D.C. RESISTANCE	.01ohms MAX.
MIN. I.L. PER MIL-STD-220 AT 25°C NO LOAD	
FREQ. MHz	I.L. (db)
10	5
100	42
1 GHz	70
10 GHz	70
SCHEMATIC	
MARKING:	
PART: SF712001 ◇ 01	
BAG:	
SCI	
51F-712-001	
DATE CODE	
LOT NO.	
QTY./BAG (100 MAX.)	

	01	00	REV. N.D.	TOLERANCES UNLESS OTHERWISE SPECIFIED	 SPECTRUM CONTROL INC.	FAIRVIEW PENNSYLVANIA	
	CN 26498-CPD	CN 18621-CPD	CHANGE NOTICE	Fractions ± 1/64		Dwn. KNOWLTON	Description
				Dec. .xx±	Date 05/07/05	RESIN SEAL FILTER	
				Dec. .xxx± .010	Engr. STRUCHEN	51F-712-001	
				Angles ±0° 30'	Scale NONE		
				CODE IDENT. NO. OLSP2			