

CURRENT TRANSFORMERS

Instrumentation and metering transformers



Donut Style

Foot Mounted

Ordering Information

DONUT MODEL	WINDOW	CURRENT RATIO
CT-0050-D-10	1.0"	50:5
CT-0075-D-10	1.0"	75:5
CT-0100-D-10	1.0"	100:5
CT-0150-D-10	1.0"	150:5
CT-0200-D-10	1.0"	200:5
CT-0300-D-10	1.0"	300:5
CT-0200-D-20	2.0"	200:5
CT-0300-D-20	2.0"	300:5
CT-0400-D-20	2.0"	400:5
CT-0500-D-20	2.0"	500:5

FOOTED MODEL	WINDOW	CURRENT RATIO
CT-0050-F-10	1.0"	50:5
CT-0100-F-10	1.0"	100:5
CT-0150-F-10	1.0"	150:5
CT-0200-F-10	1.0"	200:5
CT-0300-F-10	1.0"	300:5
CT-1200-F-15	1.5"	1200:5
CT-0150-F-20	2.0"	150:5
CT-0200-F-20	2.0"	200:5
CT-0300-F-20	2.0"	300:5
CT-0400-F-20	2.0"	400:5
CT-0600-F-20	2.0"	600:5
CT-0400-F-30	3.0"	400:5
CT-0800-F-30	3.0"	800:5

Description


Littelfuse offers a wide array of instrument rated current transformers in 1-3 inch diameter opening.

Voltage class: 600V


BIL rating: 10kV

Dimensional Drawing

DONUT STYLE

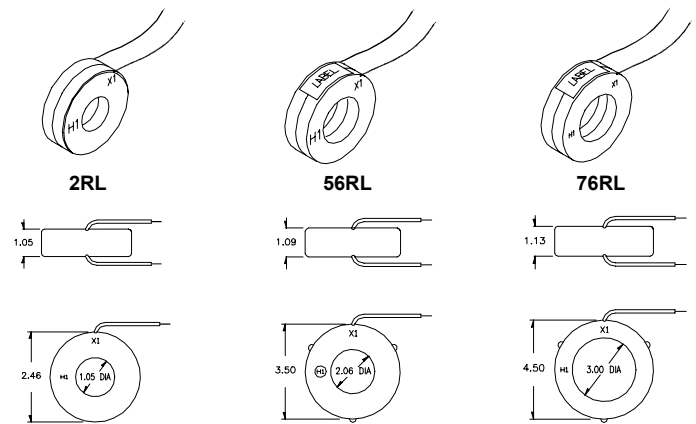

FOOT MOUNTED WITH BRASS TERMINALS

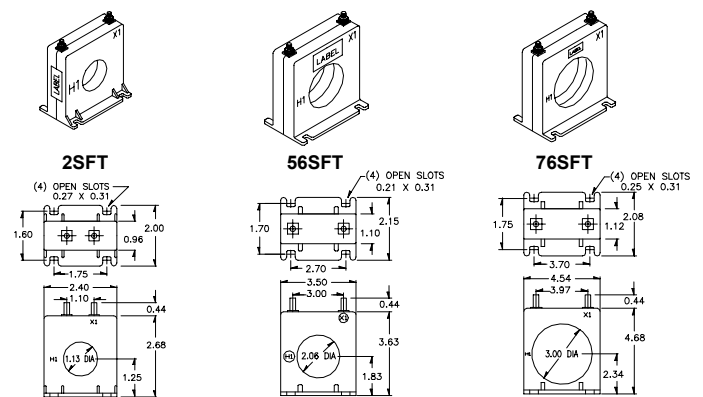

Part Numbering System

