THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT PART #	STUD SIZE		DIMENSIONS in. [mm]				
	ENGLISH	METRIC	L ± .03 [0,8]	W ± .01 [0,3]	C ± .02 [0,5]	M ± .03 [0,8]	H ± .01 [0,3]
E14-4RB	#4	M2,5	.62 [15,8]	.25 [6,4]	.20 [5,1]	.50 [12,7]	.12 [3,1]
E14-6RB	#6	M3	.62 [15,8]	.25 [6,4]	.20 [5,1]	.50 [12,7]	.15 [3,8]
E14-8RB	#8	M4	.71 [18,0]	.31 [7,9]	.25 [6,4]	.55 [14,0]	.17 [4,3]
E14-10RB	#10	M5	.71 [18,0]	.31 [7,9]	.25 [6,4]	.55 [14,0]	.20 [5,1]

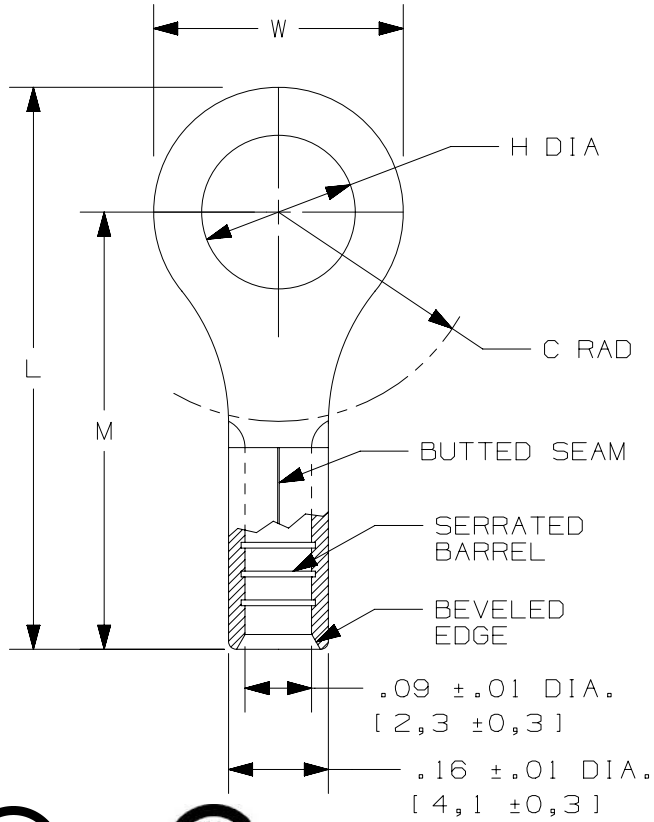

NOTES:

1. USED FOR:
   A. #16-14 AWG [1,5-2,5 mm²] SOLID OR STRANDED COPPER WIRE
   B. 302°F [150°C] MAX. OPERATING TEMPERATURE
   C. 2000V MAX VOLTAGE

2. MATERIAL:
   A. STAMPING: .03" [0,8] THK COPPER, TIN PLATED

3. INSTALLATION TOOLS:
   A. UL LISTED AND CSA CERTIFIED: CT-100A, CT-200, CT-600A (CT-570CH), CT-1570, CT-2500 (CT-2570CH)
   B. PANDUIT APPROVED: CT-160, CT-260

4. WIRE STRIP LENGTH: 9/32" $^{+1/32}_{-0}$ [7,1mm $^{+0,8}_{-0}$]

5. SEE www.panduit.com FOR PACKAGE QUANTITIES INDICATED BY PART NUMBER SUFFIX

6. DIMENSIONS IN BRACKETS ARE METRIC EQUIVALENT

LISTED 587H E52164

CERTIFIED LR31212

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN
00	2/18	JHNU	TMR	RGB	RELEASED	00123SH

TITLE

STRONGHOLD RING TERMINAL NON-INSULATED, BUTTED SEAM #16-14 AWG

CUSTOMER DRAWING

ITEM REVISION NAME: 00123STD/00

DATASET FILE NAME: 00123STD_DC/00

PANDUIT™

UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm]

.x ± .1 [2.54] .xxx ± .005 [.13]

.xx ± .01 [.25] ANGLES ± 5 °

THIRD ANGLE PROJECTION

MATERIAL: SEE NOTES

DRAWING NUMBER: SH41264

DRAWN BY	DATE	CHK	SCALE		SIZE
JHNU	2/18	TMR	N.T.S.	SHEET 1 OF 1	A

D10100DA/12