


PERFORMANCE CHARACTERISTICS

CURRENT RATING 1.5 A AT 20°C (FULLY LOADED)
1 A AT 70°C (FULLY LOADED)

RATED VOLTAGE 500V AC (CONT / CONT)
OPERATING TEMPERATURE -55°C TO 125°C
CONTACT RESISTANCE 20 MΩ MAX
INSERTION FORCE :0.75 N MAX /CONT
EXTRACTION FORCE: 0.15 N MIN /CONT
INSULATION RESISTANCE :10⁴ MΩ MIN

NOTES

- LEAD FREE INDICATOR : LF- LEAD FREE
- PERFORMANCE LEVEL INDICATOR (REF DWG No. BS,C,201844,003)
THIS PRODUCT IS CSA APPROVED
THIS PRODUCT IS UL RECOGNISED
- FOR RECOMMENDED PTH DIMENSIONS REFER DRAWING: BSA,201,572001
- THIS PRODUCT (LF) MEETS EUROPEAN UNION DIRECTIVE AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008.

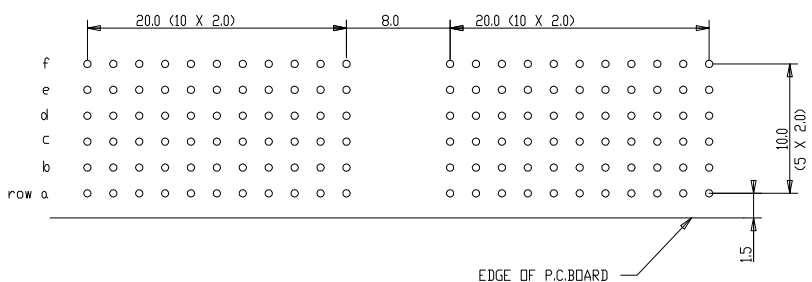

Material		Spec ref		tolerance	projection	MM
Mat code				✓	⊕	
Heat treat				100 ± 0.05	1.0 ± 0.05	
Plating/Finish						
rev	ecn no	dr	date	Dr	4 2 92	W.Paris
A	CONVERSION	KN	14-9-01	Eng		
B	105-0093	MNI	08/06/05	Chr		Product family MILLIPACS
C	3005-0278	KASIN	02/08/05	Appr		Model Name HMER10PA5101----
D	3007-0362	Kason	05/09/07			Model Revision
E	EG00-0010	NZ	05/30/10			REL Level
				FCI	MPACS 5+2R RA RCP	size A1
				title	CONN TYPE A	Scale 5.000
				Prv/E file	HMER10PA5101----	Rev. E
				catalog no	CUSTOMER DRAWING	sheet 1 of 1

This drawing is the property of FCI. It is to be used for manufacturing purposes only. It is not to be reproduced, stored in a retrieval system, or transmitted in any form or by any means, electronic, mechanical, photocopying, recording, or by any information storage and retrieval system, without the prior written permission of FCI. Copyright 2011.