

5




4

3


2

1

Mating face according to : MIL-C-24308 / DIN 41652 / CECC 75301-802

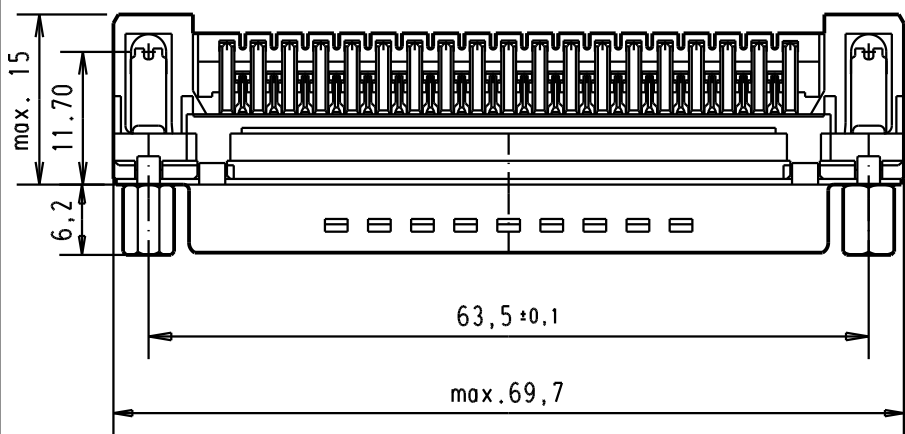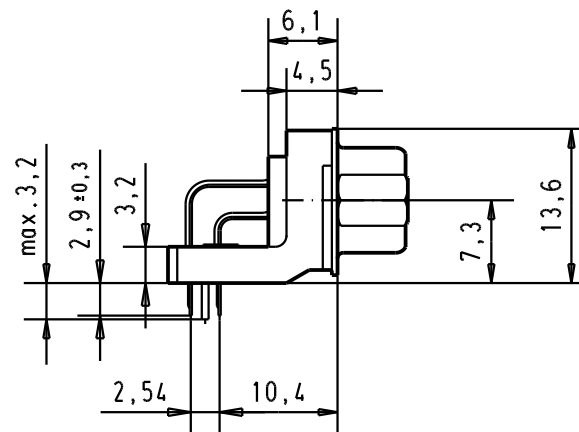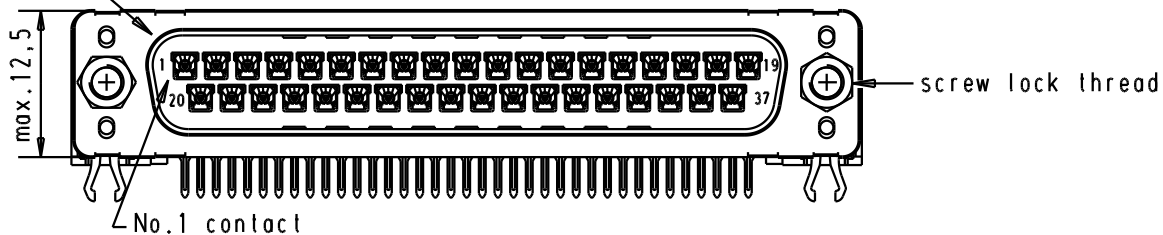


PCB layout hole component side

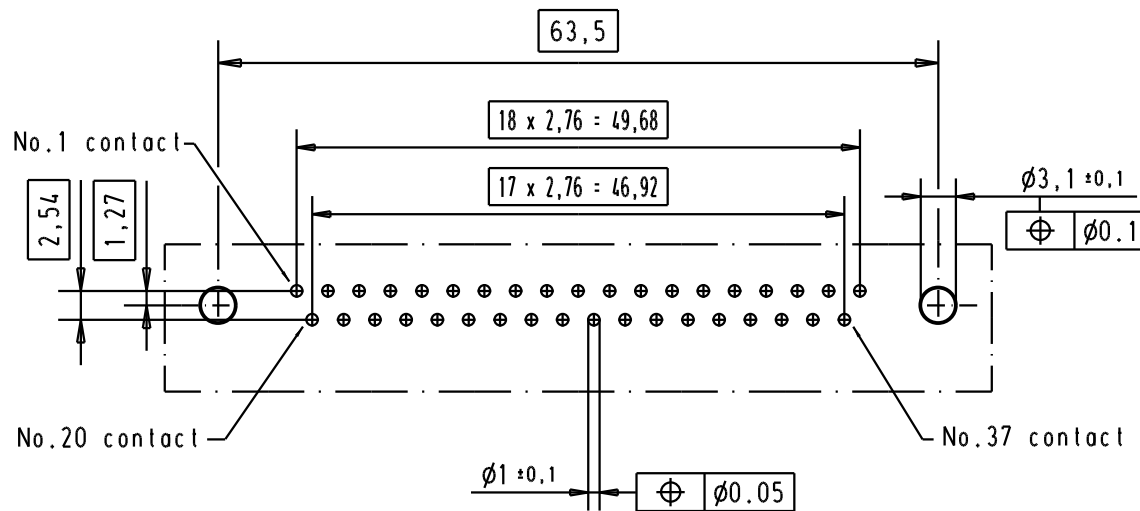

Connector retention and insertion forces on the PCB = 25 / 80 newtons

A

09 65 462 3833	M3	1																	
09 65 462 6833	M3	2																	
09 65 462 7833	M3	3																	
09 65 462 3813	4-40 UNC	1																	
09 65 462 6813	4-40 UNC	2	31892	22/04/04	JH														
09 65 462 7813	4-40 UNC	3	31084	04/SEP/02	YT														
Part number	Screw lock thread	Performance level	Mod.	Dat.	Name	HARTING EURL F-95972 Paris					TB 0965462x8x3	Sub.	Maßstab/ Scale 1.5:1	Blatt/ Page 1					