


Extended length is with 500g of force

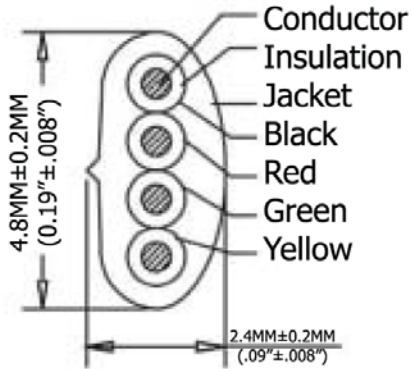

TERMINATION:

P1	P2	COLOR
1	1	BLACK
2	2	RED
3	3	GREEN
4	4	YELLOW

Extended Length ("L2")	Typical Retracted Length ("L1")
60.0 Inches - 69.0 Inches	13.0 Inches
1,524.0MM-1,752.6MM	330.2MM

Material:

- Plug Housing: Polycarbonate, clear
- Plug Terminal: 0.36"[0.14MM] Thick Phosphor Bronze
- Connector: 50µ" of Selective Gold Contact Plating
  - Area, Gold flash over the remainder
  - Over 2.54µm[.000100] thick nickel underplate
- Conductor(X4C): 26AWG (0.12X12) Bare Copper
- Insulation(X4C): PP6331 ID 0.95-1.0
- Jacke: PVC No UL 80 P
- Package: Individual PE Bag



Scale	1:1						Name	Item No.
TOLERANCE							Drawn	11.02.11
X.X	±0.40						Chappell	<b>AT-C-26-4/4/W-5/R</b>
X.XX	±0.25					Approved		
X.XXX	±0.15							
Angle	±3°							
								Title
								NON-UL 26 AWG (0.12X12)*4C, O.D.: 2.4*4.8MM, Standard Plug, 50µ" of contact plating, WHITE
								Drawing No.
								rev00
								Replace
								Sheet
			Modification	Date	Name			