



- Electrical test:**
- 100% short, open, miss wire test
 - Conduct resistance:5 Ohm(max)
 - Insulation resistance:10Mohm(min)
 - Dielectric test:DC 300V

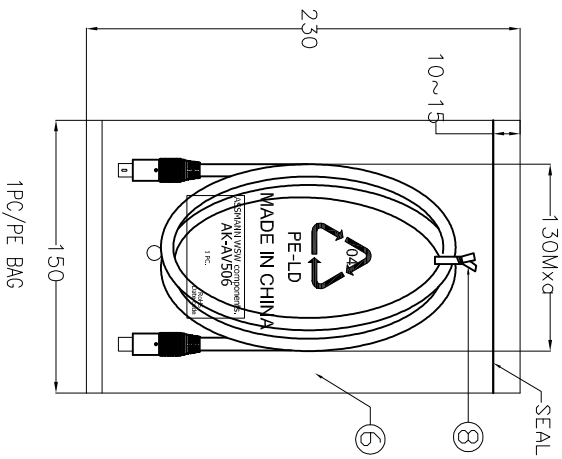

⑧	TIE	1	BLACK L=120mm
⑦	PE BAG	1/10	CLEAR SIZE: 280*330*0.05mm PRINT BLACK"MADE IN CHINA"*"10PCS"
⑥	PE BAG	1	CLEAR SIZE: 150*230*0.05mm PRINT BLACK"MADE IN CHINA"*"1PC"
⑤	OUT JACKET	6.33g	PVC 70P COLOR BLACK (MOULD NO:WM-135)
④	IN JACKET	4.2g	CLARITY LDPE(MOULD NO:NM-59)
③	TUBE	4	HEAT SHRINK TUBE BLACK OD3.0*7MM
②	CONN	6	HEAT SHRINK TUBE BLACK OD1.5*8MM
①	CABLE	2set	MINDIN 4PIN MALE G/F S-VHS SHELL-OD12.0mm 配小鐵絲.
		1	UL2835 (30#*100AX+S)*2C+4L/MY+D.W(7/0.12TC) OD7.0mm JACKET COLOR BLACK

SPECIFICATION

RoHS compliant

Unit: mm

1PC/PE BAG

Scale	Free								
TOLERANCE									
DIM		TOL							
Angle		TOL							
①	Drawn		Modification		Date	Name	Date	Name	Customer-No.
					20.02.2017	Amy	20.02.2017	Amy	ASSMANN WSW-No.
									AK-AV506
									Drawing-No.
									ASS 7864 CA
									rev00
									Sheet

ASSMANN
visual components

1	2	3	4	5	6	7
1	2	3	4	5	6	7