

PC 6-16/ 2-G1-10,16 BK - 1704643

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)


PCB headers, nominal current: 76 A, number of positions: 2, pitch: 10.16 mm, color: black, contact surface: Silver, mounting: Wave soldering




The figure shows a 5-pos. version of the product

Why buy this product

- Well-known mounting principle allows worldwide use
- Maximum flexibility when it comes to device design – one header for connectors with different connection technologies

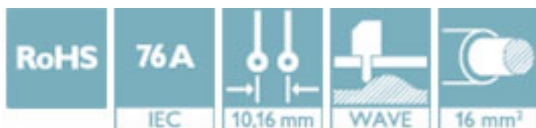

Key Commercial Data

Packing unit	50 STK
GTIN	 4 046356 929981
GTIN	4046356929981

Technical data

Dimensions

Pitch	10.16 mm
Dimension a	10.16 mm
Constructional height	17.4 mm
Length of the solder pin	4 mm
Pin dimensions	1 x 1.2 mm

General

Range of articles	PC 6-16/..-G1
Rated voltage (III/3)	1000 V
Connection in acc. with standard	EN-VDE
Nominal current I _N	76 A
Color	black
Number of positions	2

PC 6-16/ 2-G1-10,16 BK - 1704643

Technical data

Standards and Regulations

Connection in acc. with standard	EN-VDE
----------------------------------	--------

Environmental Product Compliance

China RoHS	Environmentally friendly use period: unlimited = EFUP-e
	No hazardous substances above threshold values

Approvals


Approvals


Approvals

SEV / IECCEB Scheme / EAC / cULus Recognized


Ex Approvals

Approval details

SEV		https://www.electrosuisse.ch/en/meta/shop/product-certificates.html	IK-3431
Nominal voltage UN		1000 V	
Nominal current IN		76 A	

IECEE CB Scheme		http://www.iecee.org/	CH-8077
Nominal voltage UN		1000 V	
Nominal current IN		76 A	

EAC		B.01742
-----	---	---------

cULus Recognized		http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm	E60425-20040202
Nominal voltage UN	D 600 V	B 300 V	C 300 V

PC 6-16/ 2-G1-10,16 BK - 1704643

Approvals

	D	B	C
Nominal current IN	5 A	66 A	66 A

Phoenix Contact 2018 © - all rights reserved
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG

Flachsmarktstr. 8

32825 Blomberg

Germany

Tel. +49 5235 300

Fax +49 5235 3 41200

<http://www.phoenixcontact.com>