

1

2

3


4

5


6

7

Length





12,0±0,3




① Cable White print


AWM STYLE 2725 80°C 30V VW-1 28AWG/1P 24AWG/2C
---C--- AWMI /III A 80°C 30V FT1 USB CABLE



12,0±0,3



① ③



A

A

B

B

C

C

D



D

E

E

F

F

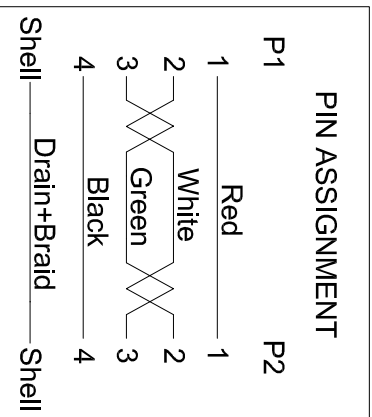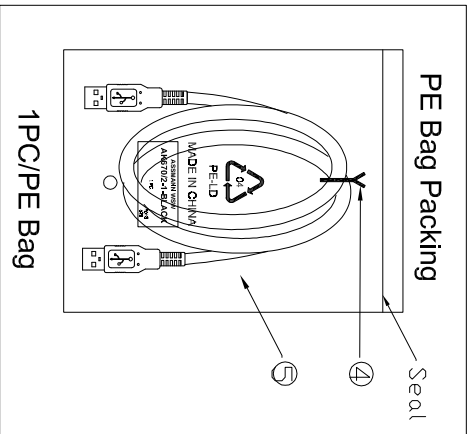

WSW P/N	Jacket color	Length(mm)
AK670/2-1-BLACK	Black	1000±30
AK670/2-2-BLACK	Black	2000±50
AK670/2-3-BLACK	Black	3000±50
AK670/2-5-BLACK	Black	5000±50

- Electrical test:
1. 100% short, open, miswire test
 2. Conduct resistance: 2 Ohm max.
 3. Insulator resistance: 10Mohm min.
 4. Dielectric test: DC 300V

RoHS compliant

Unit: mm

1

2

3

4

5

6

7

Scale	Free	Free
TOLERANCE		
DIM	TOL	
Angle	TOL	

NO.	NAME	QTY	DATE	NAME	SPECIFICATION
⑤	PE Bag	1		Amy	Clear Print black "MADE IN CHINA" + "1PC"
④	TIE	1		Amy	Black
③	Out Jacket	12g		Amy	Black PVC-45P
②	Cable	1		Amy	USB2.0 UL2725 28#/1P+24#/2C+AEB OD:4.7mm Black
①	CONN	2		Amy	USB A Male Shell:Nickel Pin:G/F Insulator color:White

ASSMANN
components

Customer-No.	ASSMANN WSW-No.	AK670/2-x-BLACK
Drawing-No.	ASS 7243 CA	rev01
Replace		Sheet

H

H

1

2

3

4

5

6

7