
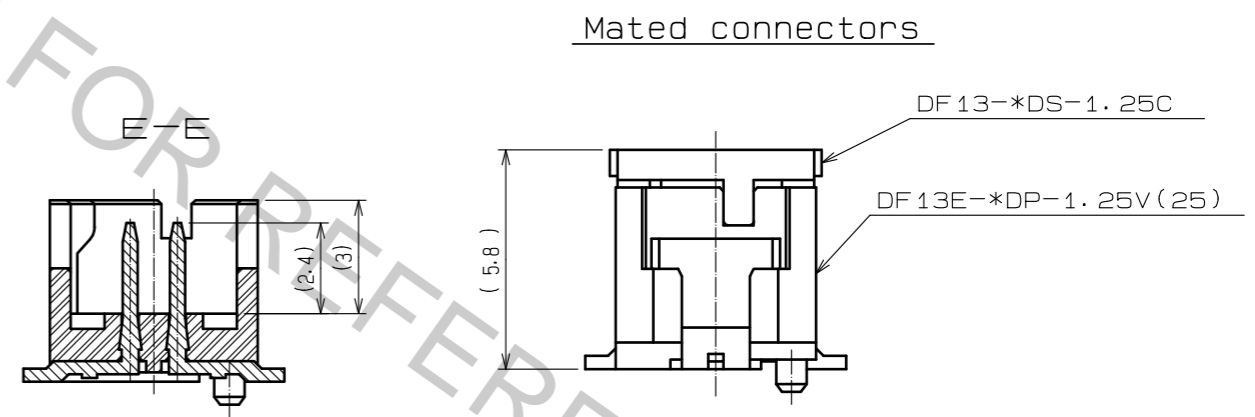
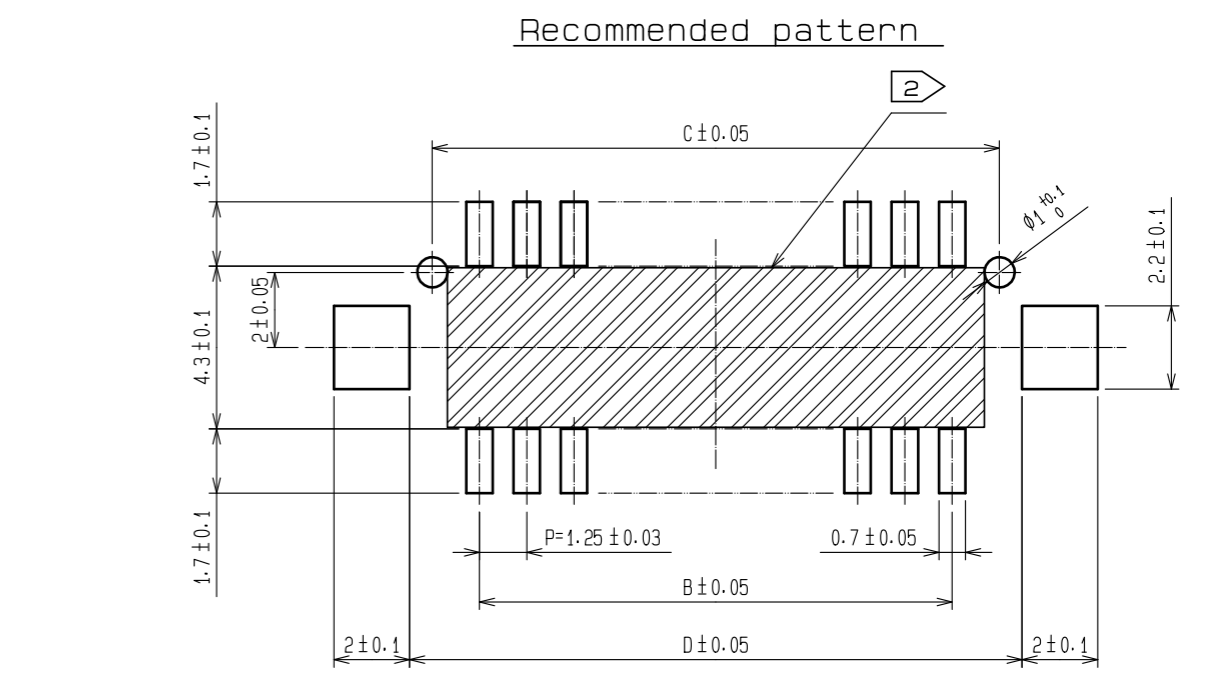


Part No.	Number of contacts	Code No.	A	B	C	D
DF13E-10DP-1.25V(25)	10	CL536-0566-0-25	12.1	5.0	7.5	8.7
DF13E-20DP-1.25V(25)	20	CL536-0567-0-25	18.35	11.25	13.75	14.95
DF13E-30DP-1.25V(25)	30	CL536-0568-0-25	24.60	17.50	20.00	21.20

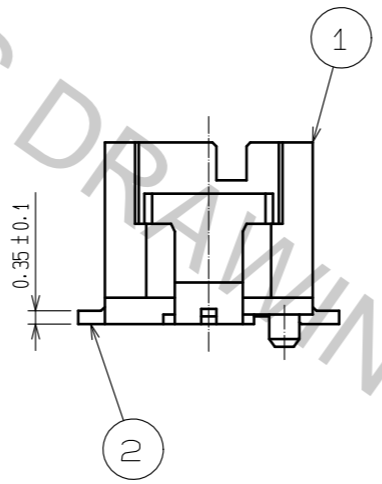

Notes 1 : Lead co-planality include reinforced metal fittings shall be 0.1mm MAX.  
 ② : If there are pattern and a bia hole on part, there is a possibility that it will make contact with the leads.


NO.	MATERIAL	FINISH .	REMARKS	NO.	MATERIAL	FINISH .	REMARKS
2	Brass		Lead area: Tin-copper plated 1μm MIN Under plating: Nickel 0.5μm MIN	5	S. PVC		Gray
1	Polyamide		Beige, UL94V-0	4	R. PVC		Electrostatic protection
				3	Phosphor bronze		Tin plated 1μm MIN

UNITS	SCALE	COUNT	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
mm	5 : 1	△				

APPROVED : KI. AKIYAMA	16.04.04	DRAWING NO.	EDC-367983-25-00
CHECKED : TS. FUKUSHIMA	16.04.04	PART NO.	DF13E-*DP-1.25V(25)
DESIGNED : YK. YAMAGUCHI	16.04.04	CODE NO.	CL536-
DRAWN : MI. SAKIMURA	16.04.01		



DF13シリーズDP-V MADE IN JAPAN

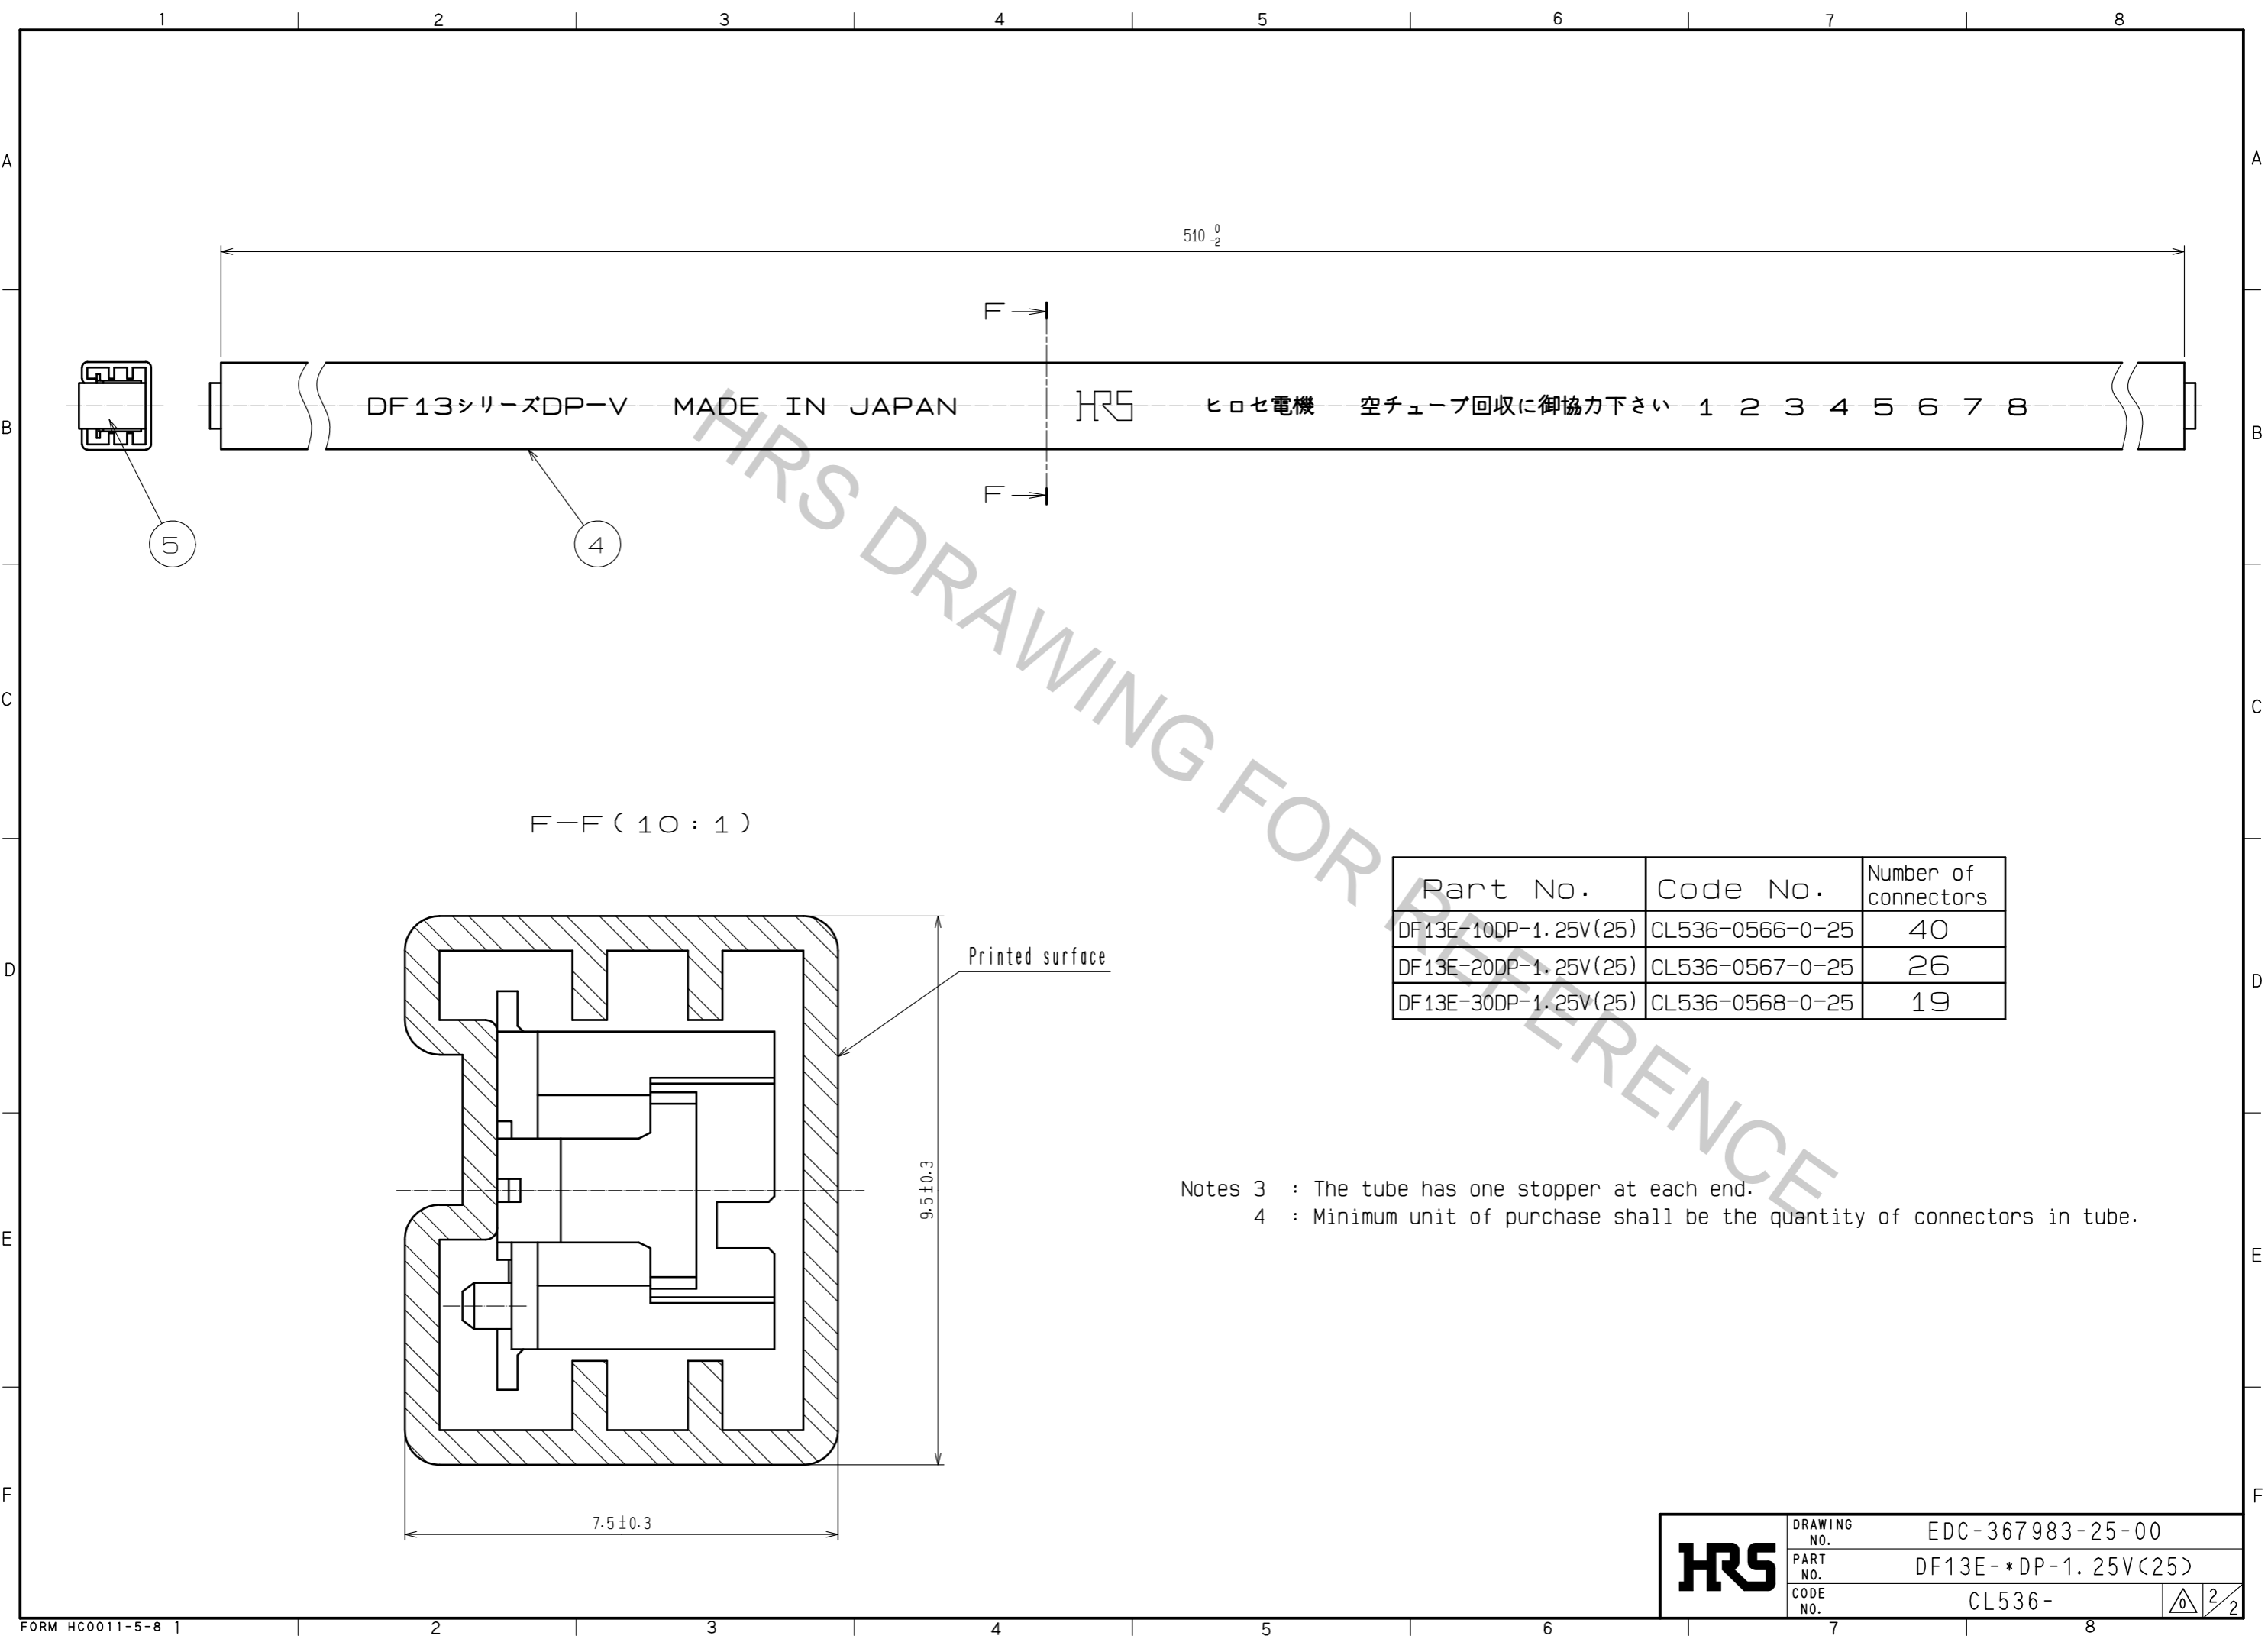510<sup>0</sup>/<sub>-2</sub>

F-F (10 : 1)

Printed surface

9.5 ± 0.3

7.5 ± 0.3

Part No.	Code No.	Number of connectors
DF13E-10DP-1.25V(25)	CL536-0566-0-25	40
DF13E-20DP-1.25V(25)	CL536-0567-0-25	26
DF13E-30DP-1.25V(25)	CL536-0568-0-25	19

Notes 3 : The tube has one stopper at each end.  
 4 : Minimum unit of purchase shall be the quantity of connectors in tube.

<b>HRS</b>	DRAWING NO.	EDC-367983-25-00	
	PART NO.	DF13E-*DP-1.25V(25)	
	CODE NO.	CL536-	2/2