

## D-SUB crimp contact - VS-ST-CD-HD-1,0/13,5/0,37 - 1655276

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Crimp contact, for D-SUB contact inserts with high density, pin, connection cross section AWG 22, turned, gold-plated

RoHS

### Key Commercial Data

Packing unit	100 STK
GTIN	
GTIN	4046356029216

### Technical data

#### Mechanical characteristics

Insertion/withdrawal cycles	≥ 50
Connection method	Crimp connection
Type of contact	Crimp contacts
Conductor cross section	0.34 mm <sup>2</sup>
Connection cross section AWG	22
Mounting type	Crimp connection
Insulation resistance	≥ 5 GΩ
Contact type	turned

#### Ambient conditions

Ambient temperature (operation)	-55 °C ... 125 °C
---------------------------------	-------------------

#### Material data

Contact material	Copper alloy
Contact surface material	Hard gold-plated over nickel

#### Electrical characteristics

Rated current	3 A
Rated voltage (III/3)	60 V

## D-SUB crimp contact - VS-ST-CD-HD-1,0/13,5/0,37 - 1655276


### Technical data

#### Environmental Product Compliance

China RoHS	Environmentally Friendly Use Period = 50
	For details about hazardous substances go to tab "Downloads", Category "Manufacturer's declaration"

### Drawings

Dimensional drawing

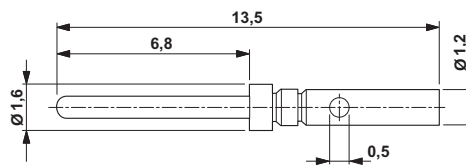

D-SUB crimp contact pin

---

Phoenix Contact 2018 © - all rights reserved  
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG  
Flachmarktstr. 8  
32825 Blomberg  
Germany  
Tel. +49 5235 300  
Fax +49 5235 3 41200  
<http://www.phoenixcontact.com>