


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT PART #	TAB SIZE in. [mm]	WIRE RANGE		COLOR	MAX. WIRE INSULATION DIAMETER	DIMENSIONS in. [mm]			TOOL CHART	
		ENGLISH AWG	METRIC mm ²			L ± .03 [0,8]	W ± .01 [0,3]	H ± .01 [0,3]	PRESSES: CP-861, CP-862, CP-871	APPLICATOR DIES: CA9, CA-800EZ
DNF18250FIBX	.250 X .032 [6,3 X 0,8]	22-18	0,5-1,0	RED	.21 [5,4]	.93 [23,6]	.35 [8,9]	.22 [5,5]	CD-800-6 CD9-6B	
DNF18205FIBX	.205/.187 X .032 [5,2/4,8 X 0,8]					.87 [22,1]	.31 [7,9]	.22 [5,5]		
DNF18206FIBX	.205/.187 X .020 [5,2/4,8 X 0,5]					.87 [22,1]	.31 [7,9]	.22 [5,5]		
DNF14250FIBX	.250 X .032 [6,3 X 0,8]	16-14	1,5-2,5	BLUE	.24 [6,1]	.93 [23,6]	.35 [8,9]	.22 [5,5]		CD-800-8 CD9-8B
DNF14205FIBX	.205/.187 X .032 [5,2/4,8 X 0,8]					.87 [22,1]	.31 [7,9]	.22 [5,5]		
DNF14206FIBX	.205/.187 X .020 [5,2/4,8 X 0,5]					.87 [22,1]	.31 [7,9]	.22 [5,5]		

NOTES:

- USED FOR:
 - STRANDED COPPER WIRE ONLY
 - 221°F [105°C] MAX. OPERATING TEMPERATURE
 - 600V. MAX. BLDG WIRE
 - 6-12 LBS INTIAL INSERTION/WITHDRAWAL FORCE
- MATERIAL:
 - STAMPING: CDA 260 BRASS, TIN PLATED
 - HOUSING: TYPE 66 NYLON
- WIRE STRIP LENGTH: 9/32" ^{+1/32}/₀ [7,1 ^{+0,8}/₀]
- SEE www.panduit.com FOR PACKAGE QUANTITIES INDICATED BY PART NUMBER SUFFIX
- DIMENSIONS IN BRACKETS ARE METRIC EQUIVALENT
- COLORS ARE TRANSLUCENT

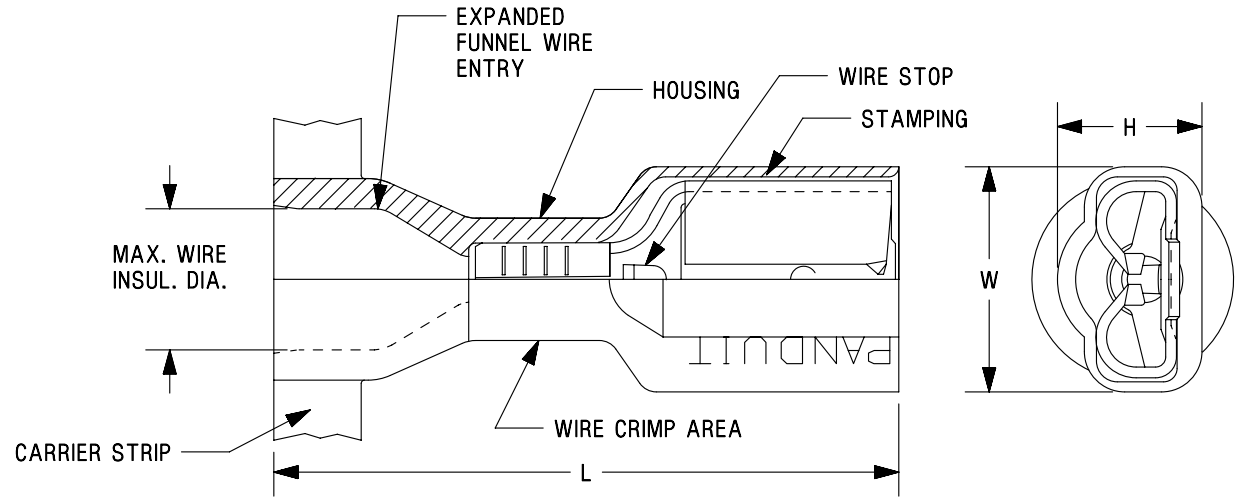

TITLE FEMALE DISCONNECTS, NYLON FULLY INSULATED - EXPANDED WIRE ENTRY		CUSTOMER DRAWING	
ITEM REVISION NAME N41167BA/05		PANDUIT	
DATASET FILE NAME N41167BA_DC/05A			
UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm]		MATERIAL: SEE NOTES	
.x ± .1 [2.54] .xxx ± .005 [.127]		DRAWING NUMBER: A41167	
.xx ± .01 [.25] ANGLES ± 5 °		THIRD ANGLE PROJECTION	
DRAWN BY DSM	DATE -	CHK -	SCALE N.T.S.
REV		SHT 1 OF 1	
DATE		SIZE A	

05	10.10.12	JBN	LCA	VMB	ADDED METRIC EQUIVALENT. CHANGE PACKAGING NOTE. REVISED INSTALLATION TOOLS NOTE. UPDATED DRAWING TO CURRENT STANDARDS.	A41167
REV	DATE	BY	CHK	APR	DESCRIPTION	ECN

D10100DA/15