
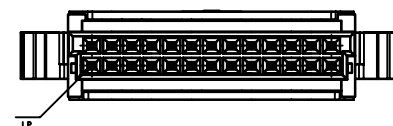
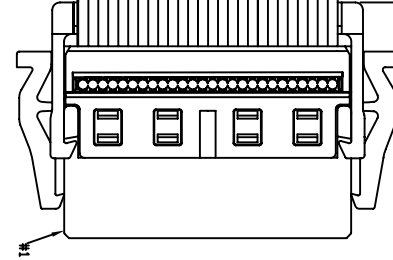
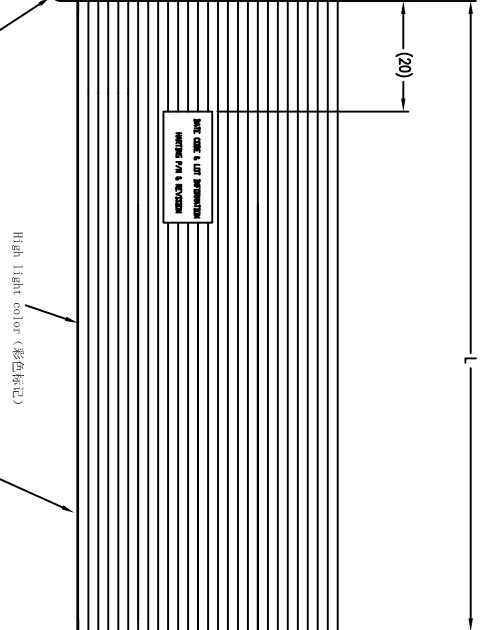
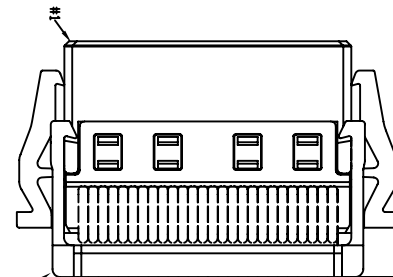


CRZ 1362


ROHS COMPLIANT

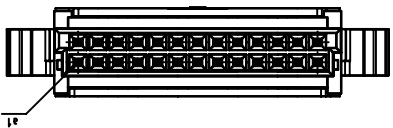

Har-Flex Female 26pole, with Strain relief, PL2
 Flat cable, pitch 0.635mm, AWG30, 26 conductors

Har-Flex 26P female connector

Har-Flex 26P female connector

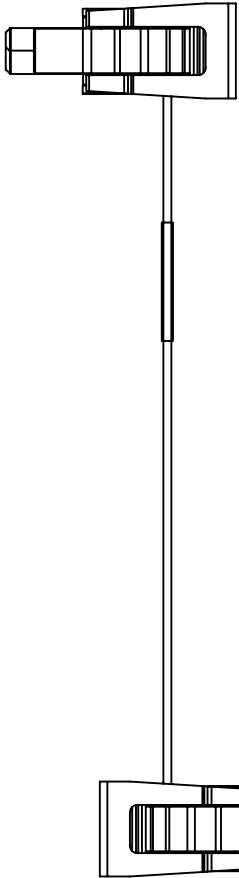

Part-No. / 产品号码	Length/长度
33 15 243 050 0009 .00	500±5
33 15 243 020 0008 .00	200±3
33 15 243 010 0007 .00	100±3
33 15 243 027 0034 .00	270±3

- NOTES/要求:
- 1.) CABLE MUST BE PERFORMED 100% CONTINUITY TEST AND HI-POT (300VDC) TEST.
 - 2.) CABLE OPERATION TEMPERATURE= -30° C TO +105° C .
 - 3.) WHITE LABEL CONTENT:

DATE CODE & LOT INFORMATION
 HARTING P/N & REVISION

Rev.	Description	Appr.	Date
01	Add side view.	Lucy.Z	15/04/13
00	Prototype	Andr-ew.H	25/09/12

Free size tol.				All Dimensions in mm Original Size DIN A4		Ref. MB
V=	Name	Date	Scale	cm ³	A=	cm ²
Detail			Sheet			
Insp.			1 of 1			
Approved						
HARTING (Zhuohai) Manufacturing Co., Ltd				HARTING		
Title				SEE BILL OF MATERIAL		
Har-Flex female 26pole, double ended						
Flat cable assembly, L=xMM						
DWG. No.				TB_33 15 0003 .01		

4

3

2

1

A

B

C

D