


RoHS
Compliant

VERSION	DESCRIPTION	DATE
1.0	New Release	2018/4/12

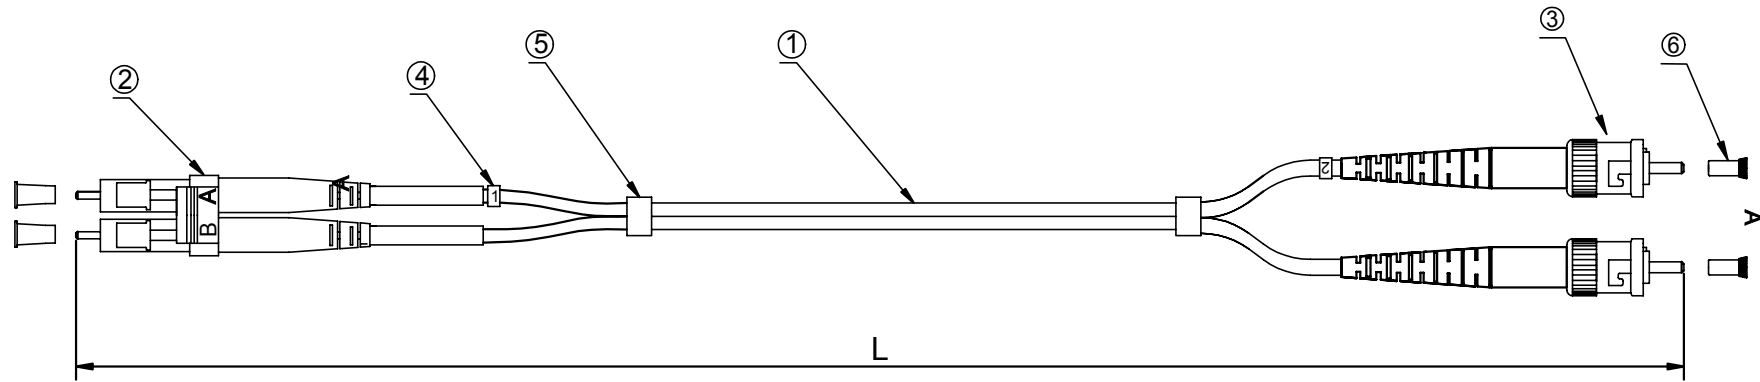


PART NO	DRAWING NO	CABLE LENGTH "L"	COLOR
913M-2-1-00100-PL	671-448-A	1000±100	Orange
913M-2-1-00200-PL	671-448-B	2000±100	Orange
913M-2-1-00300-PL	671-448-C	3000±100	Orange
913M-2-1-00500-PL	671-448-D	5000±100	Orange
913M-2-1-00700-PL	671-448-E	7000±100	Orange
913M-2-1-01000-PL	671-448-F	10000±100	Orange
913M-2-1-01500-PL	671-448-G	15000±100	Orange
913M-2-1-02000-PL	671-448-H	20000±100	Orange
913M-2-1-02500-PL	671-448-I	25000±100	Orange

NOTES:
Insertion loss < 0.3 dB

CnC Tech, LLC

Industrial Cable and Connector Technology



UNIT mm

unless otherwise stated
Tolerances
mm
XXX.XX ±0.3 ±2°
XX.XX ±0.2
X.XX ±0.1

TITLE

Patch Cord, LC-ST,MM-62.5/125 OM1, Duplex, OFNP, orange, 2.0mm, xxM

P/N

913M-2-1-0xxxx-PL

DRAWN BY

Customer P/N

913M-2-1-0xxxx-PL

CHECK BY

SIZE A4

SCALE Free

PAGE 1/1

APPROVAL BY

6	Dust Cover
5	Shrinkage Tube
4	¹ / ₂ Code
3	ST MM Connector (Metal housing Red/black boot)
2	LC MM Duplex Connector (Beige housing White boot)
1	2.0mm,Duplex,MM-62.5/125 OM1, OFNP, Optical Fiber Cable(Orange)
No.	Description