
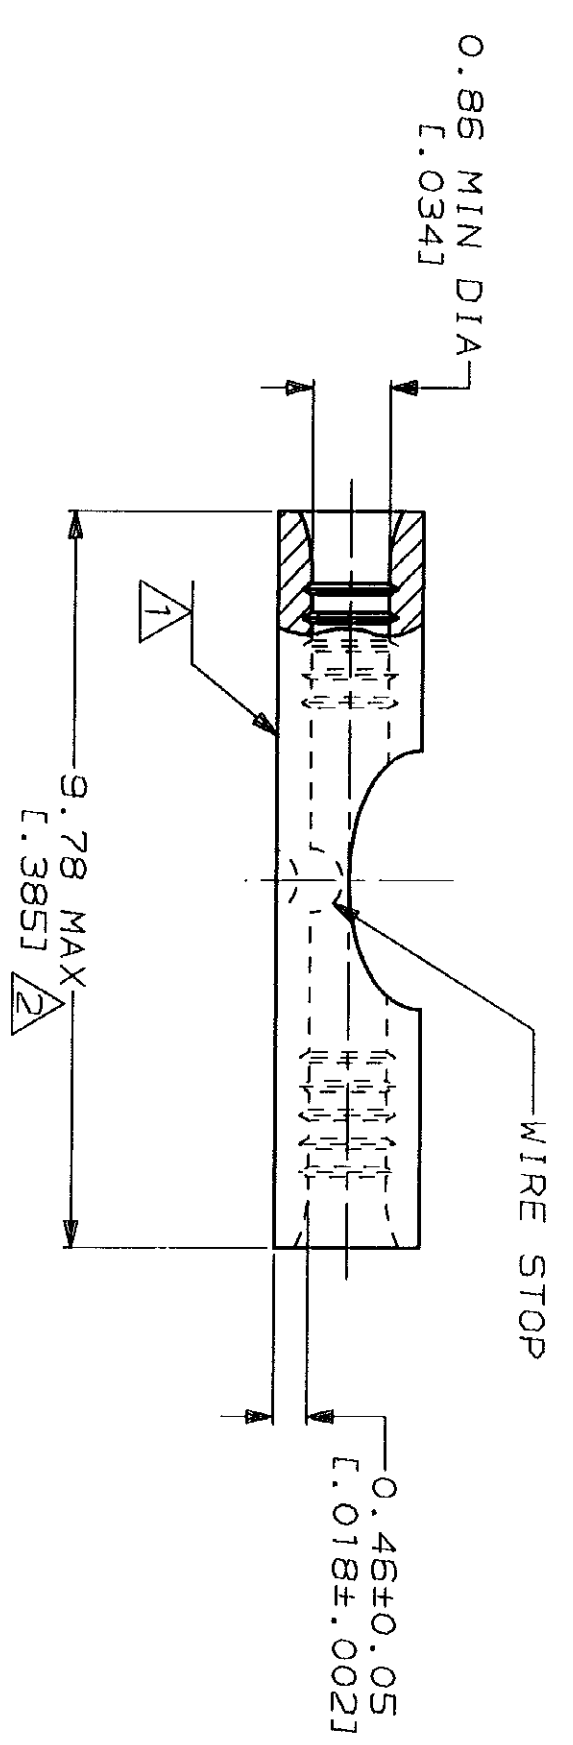


LOC	DIST	REV	ZONE	LTR	DESCRIPTION	DATE	APPD
G	14	P			RELEASED PER 0720-0008-93	2-24-93	YB DAP

METRIC
 DIMENSIONS LISTED IN mm [INCHES]

AMP WIRE RANGE	UL E13288 Listed
26-22 AWG STRANDED	NOT LISTED
UL LR7189 Certified	MILITARY P/N AND CLASS
NOT CERTIFIED	NOT APPLICABLE

△ STAMP AMP APPROX AS SHOWN
 △ MAXIMUM LENGTH DOES NOT INCLUDE
 MANUFACTURING TABS

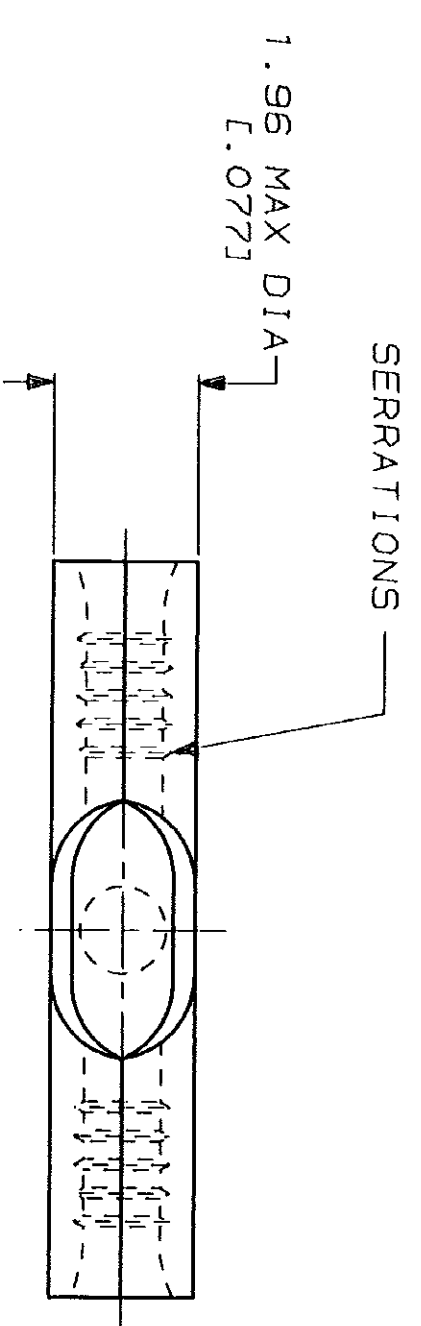

**AMP INCORPORATED
 CUSTOMER SERVICE SYSTEMS**

FOR ADDITIONAL PRODUCT INFORMATION OR COPIES OF DRAWINGS AND TECHNICAL DOCUMENTS	PRODUCT INFORMATION CENTER 1-800-522-6752	MAX RECOMMENDED OPERATING TEMPERATURE: 170°C MAX	DO NOT SCALE PRINT. UNLESS SPECIFIED DIMENSIONS IN mm [INCHES] TOLERANCES ON: 2 PLC DEC ± 3 PLC DEC ± ANGLES
FOR APPLICATION TOOLING INFORMATION	TOOLING ASSISTANCE CENTER 1-800-722-1111	VOLTAGE RATING: NOT APPLICABLE	MATERIAL COPPER PER ASTM B-152 ANNEALED
FOR ORDER ENTRY	1-800-526-5142	WIRE CROSS SECTIONAL AREA RANGE: 0.1-0.41 mm² [202-810] CIR MILS STRANDED	FINISH TIN PLATE 0.00254 [L.000100] MIN THK PER MIL-T-10727

DR 2-24-93 TA BRINKMAN	DR 2-24-93 DA PATTERSON	NAME AMP AMP Incorporated Harrisburg, PA 17105-3608	SIZE CAGE CODE 00779	DRAWING NO 321024
APPD 2-24-93 DE MILLER	APPD 2-24-93 JL MECKLEY	APPLICATION SPEC	SCALE 10:1	SHEET 1 OF 1