


3M™ Active Optical Cable (AOC) Assemblies for SFP+ Applications  
 Visit <http://www.3Mconnectors.com>

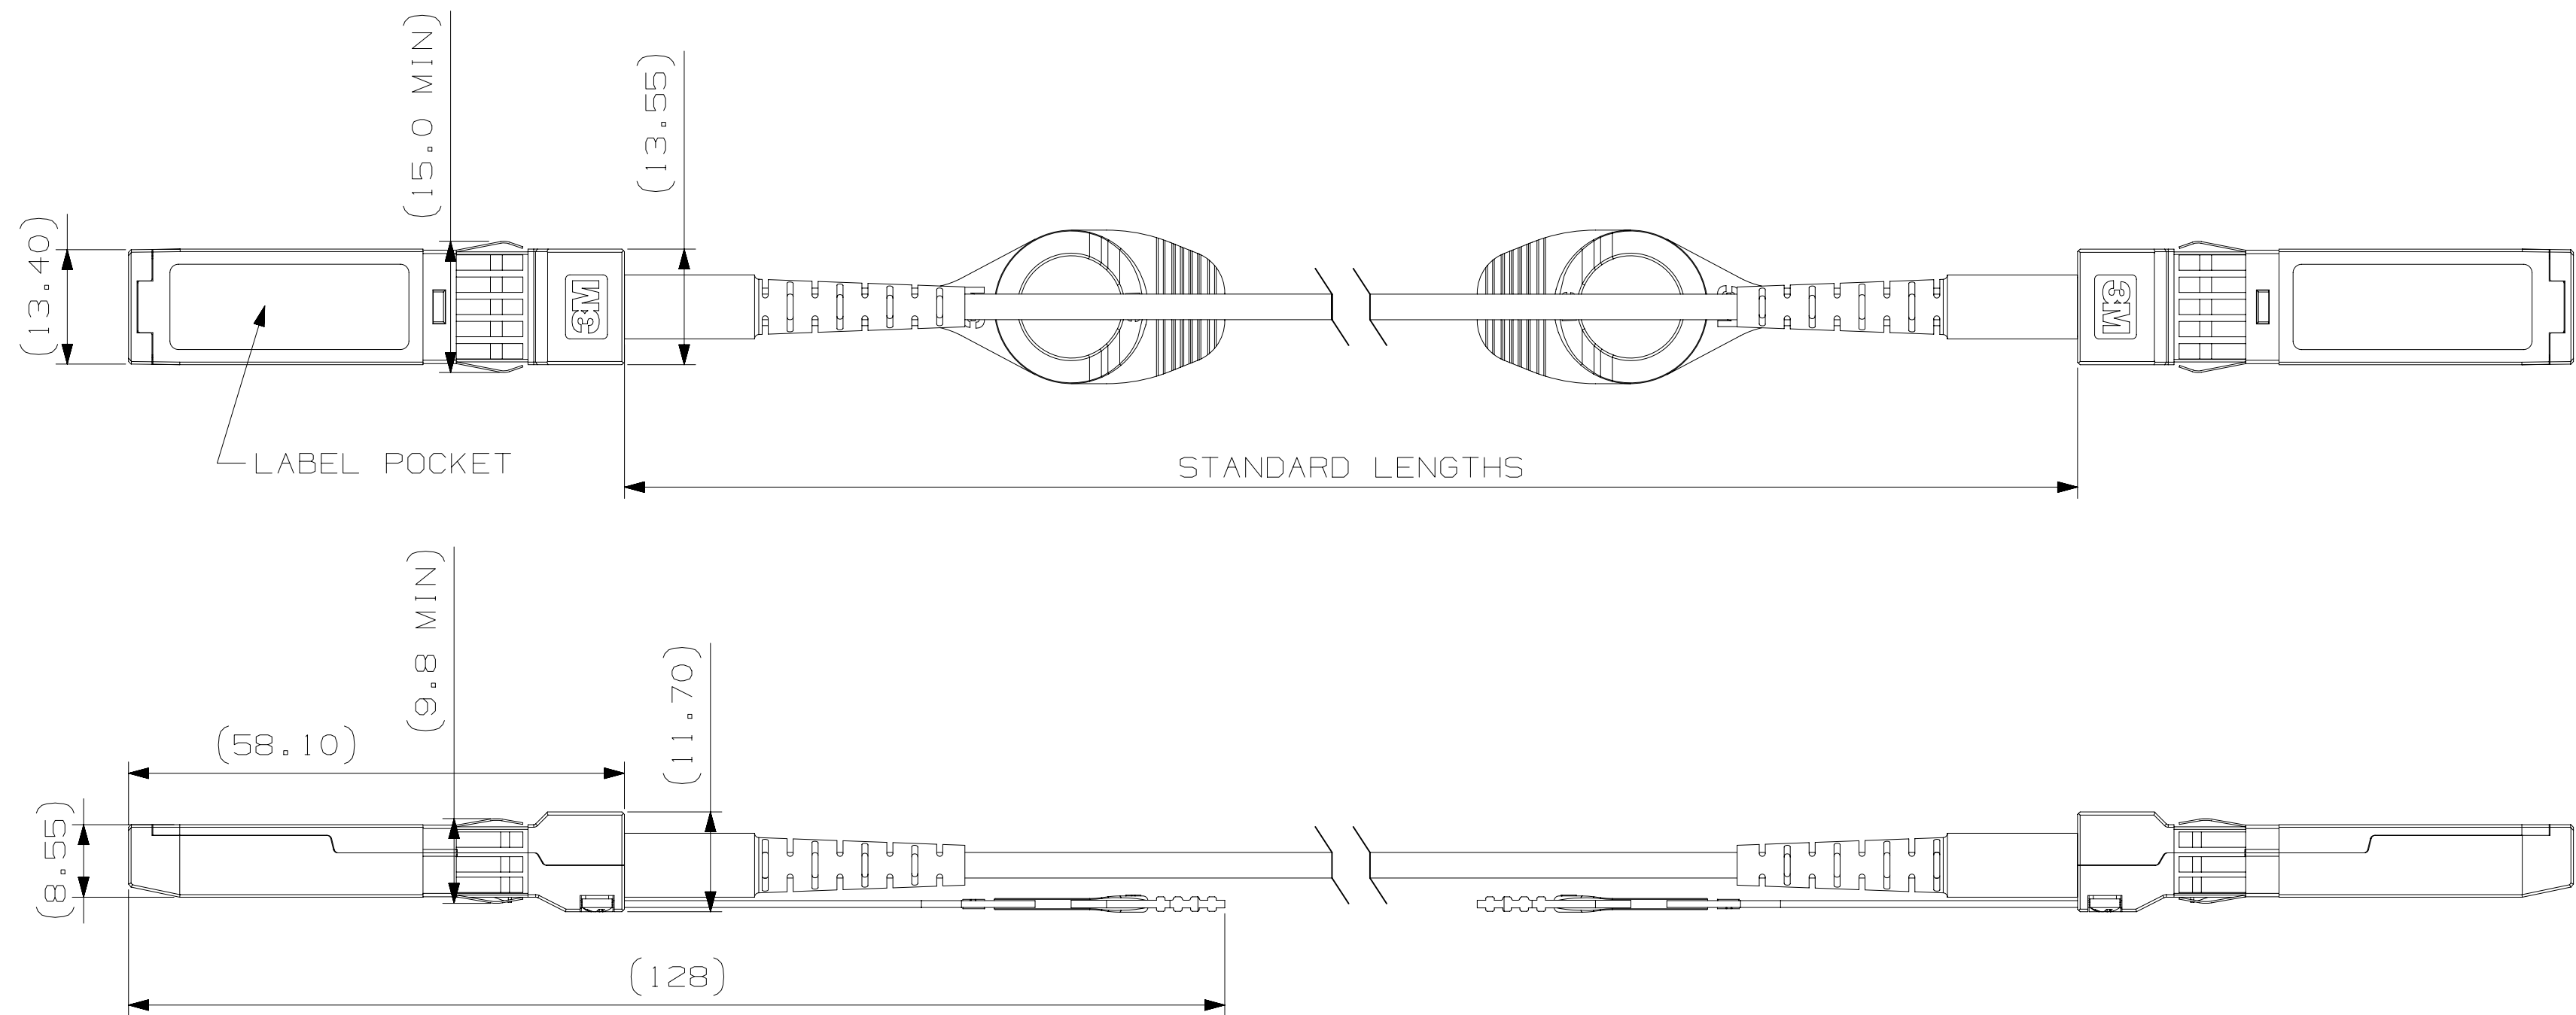

NOTES:

1. RoHS COMPLIANT. SEE REGULATORY INFORMATION APPENDIX IN "RoHS COMPLIANCE" SECTION AT [www.3Mconnectors.com](http://www.3Mconnectors.com) (E1 & C1 APPLY)
2. HOUSING MATERIAL: ZINC ALLOY  
 FINISH: NICKEL PLATING  
 CABLE: ORANGE OM2+, PLENUM RATED THERMOPLASTIC, OR  
 ORANGE OM2+, LOW SMOKE ZERO HALOGEN RATED THERMOPLASTIC (LSZH)
3. ORDERING INFORMATION:  
 6A11-A01X1-XXX.0-0

STANDARD LENGTHS:  
 1M INCREMENTS FROM 2M TO 30M, 35M,  
 40M, 45M, 50M, 60M, 70M, 80M, 90M, 100M

CABLE TYPE:  
 2=PLENUM  
 4=LOW SMOKE ZERO HALOGEN (LSZH)

example: PART NUMBER & DESCRIPTION  
 6A11-A0121-003.0-0  
 (AOC, SFP+ TO SFP+, QDR, 1CH, PLENUM, OM2+, 3M)

DESIGN REFERENCE		NEXT ASSEMBLY		REV	ECO	ISSUE DATE AND DESCRIPTION		DRFT	CHKD
DISTRIBUTION CODES				DRFT	OH KIM CHYE	DATE	JAN 15, 2013	MFG	DATE
				CHKD	QIAO YUN LONG	DATE	JAN 15, 2013	APPVL	DATE
DIVISION		DIVISION CODE		3M		3M Center St. Paul, MN 55144		© 3M COPYRIGHT 2013 This document and the information it contains are 3M property and may not be reproduced or further distributed without 3M permission, or used or disclosed other than for 3M authorized purposes. All rights reserved.	
DO NOT SCALE DRAWING	SCALE 1/1	TOLERANCES EXCEPT AS NOTED		TITLE					
THIRD ANGLE PROJECTION		INCHES .0 ± .00 ± .000 ± .0000 ±		AOC, SFP+ TO SFP+, QDR, 1CH, OPTICAL CABLE					
INTERPRET PER ASME Y14.5 - 1994		MILLIMETERS 0 ±1 .0 ±.5 .00 ±.05 .000 ±.005		CAGE NUMBER		SIZE	DRAWING NO.		REV.
MAX SURFACE ROUGHNESS 125 <input checked="" type="checkbox"/> ALL SURFACES <input checked="" type="checkbox"/> MARKED ONLY		ANGLES ±1°		C		78-5100-2572-5	A		
				MODEL		CRITICAL DIMENSIONS		DET. <input type="checkbox"/> LISTS <input type="checkbox"/> YES <input checked="" type="checkbox"/> NO SHT 1 OF 1	

78-5100-2572-5  
DRAWING NUMBER

A  
REVISION

B

A