


Notes 1 : Lead co-planality include reinforced metal fittings shall be 0.1mm MAX.
 ②: If there are pattern and a bia hole on part, there is a possibility that it will make contact with the leads.

Part No.	Number of contacts	Code No.	A	B	C	D
DF13E-10DP-1.25V(55)	10	CL536-0566-0-55	12.1	5.0	7.5	8.7
DF13E-20DP-1.25V(55)	20	CL536-0567-0-55	18.35	11.25	13.75	14.95
DF13E-30DP-1.25V(55)	30	CL536-0568-0-55	24.60	17.50	20.00	21.20
DF13E-40DP-1.25V(55)	40	CL536-0569-0-55	30.85	23.75	26.25	27.45

NO.	MATERIAL	FINISH .	REMARKS	NO.	MATERIAL	FINISH .	REMARKS
2	Brass	Contact area:Gold plated 0.2µm MIN Lead area:Tin-copper plated 1µm MIN Under plating:Nickel 1µm MIN		5	S. PVC		Gray
1	Polyamide	Beige,UL94V-0		4	R. PVC		Electrostatic protection
				3	Phosphor bronze		Tin plated 1µm MIN

UNITS	SCALE	COUNT	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
mm	5 : 1	△				

APPROVED : KI. AKIYAMA	16.03.31	DRAWING NO.	EDC-367983-55-00
CHECKED : TS. FUKUSHIMA	16.03.29	PART NO.	DF13E-*DP-1.25V(55)
DESIGNED : MI. SAKIMURA	16.03.29	CODE NO.	CL536-
DRAWN : MI. SAKIMURA	16.03.29		

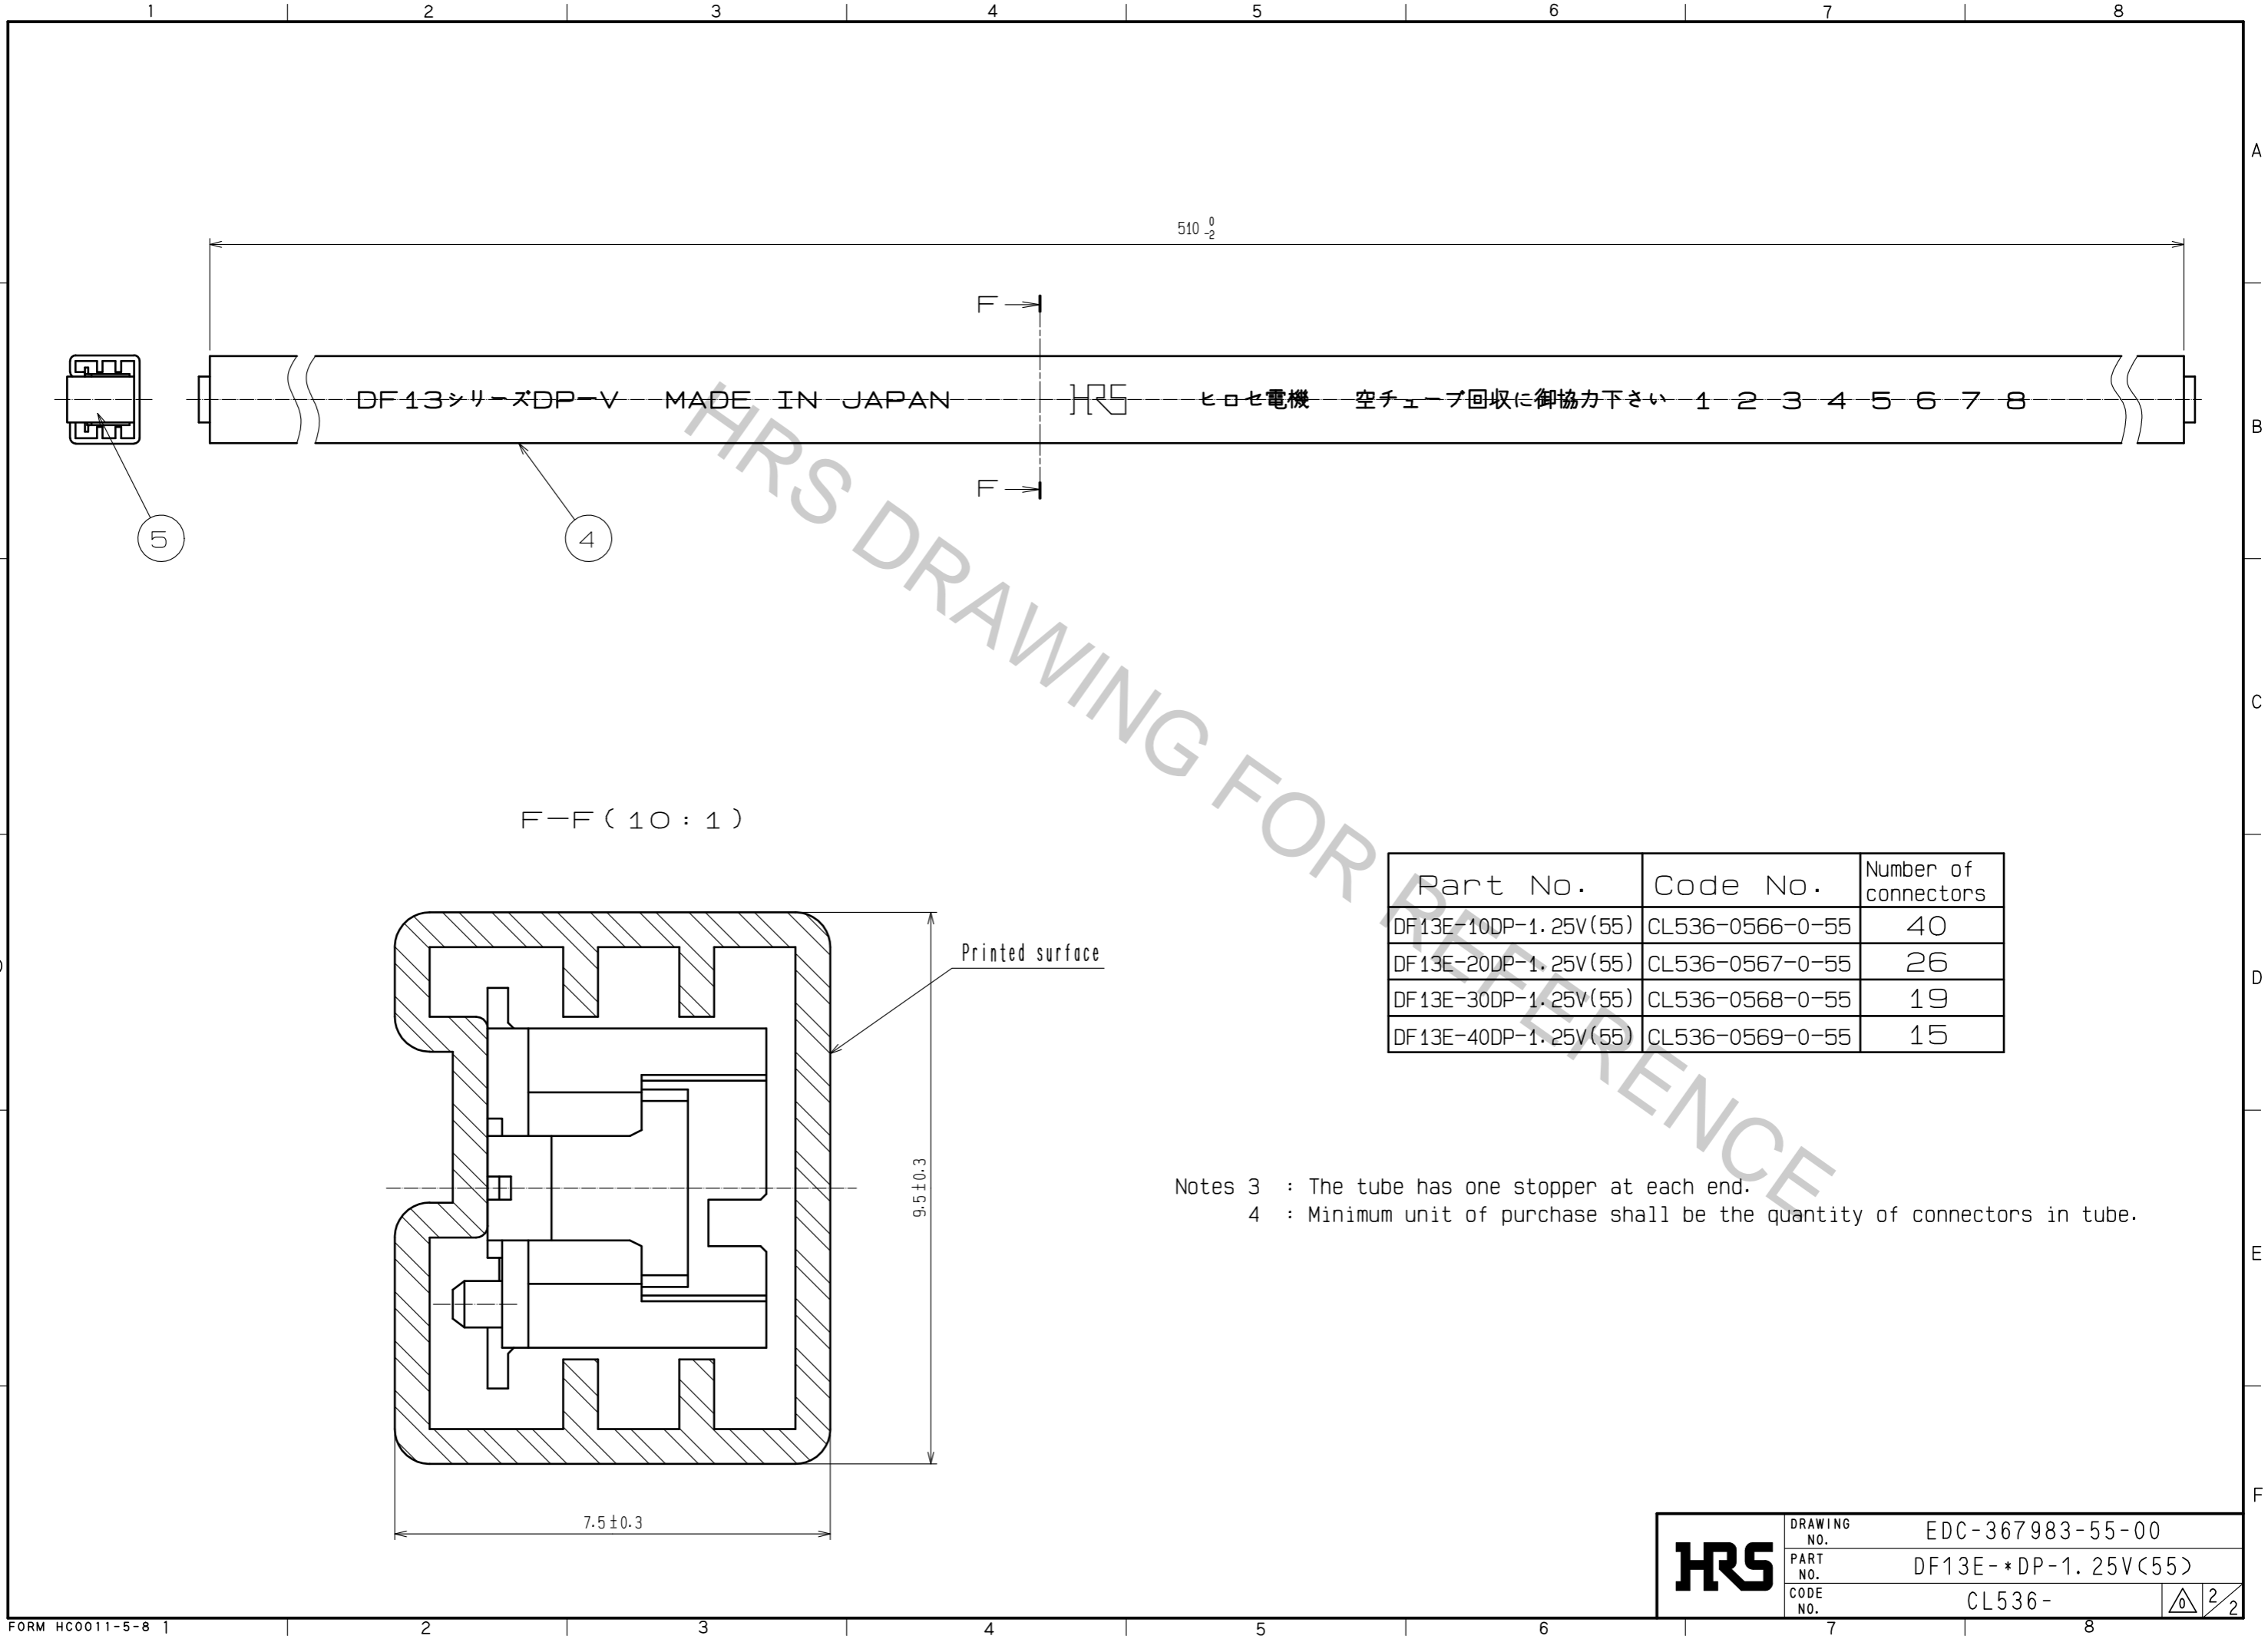

DF13シリーズDP-V MADE IN JAPAN

510 ⁰/₋₂

ヒロセ電機 空チューブ回収に御協力下さい 1 2 3 4 5 6 7 8

F-F (10:1)

Printed surface

9.5 ± 0.3

7.5 ± 0.3

Part No.	Code No.	Number of connectors
DF13E-10DP-1.25V(55)	CL536-0566-0-55	40
DF13E-20DP-1.25V(55)	CL536-0567-0-55	26
DF13E-30DP-1.25V(55)	CL536-0568-0-55	19
DF13E-40DP-1.25V(55)	CL536-0569-0-55	15

Notes 3 : The tube has one stopper at each end.
 4 : Minimum unit of purchase shall be the quantity of connectors in tube.

HRS	DRAWING NO.	EDC-367983-55-00
	PART NO.	DF13E-*DP-1.25V(55)
	CODE NO.	CL536-