

| Revision level | | Revision Record | Changed | Date | Approved | Date |
|----------------|---------|-----------------|---------|----------|----------|----------|
| part | drawing | | | | | |
| — | 01 | See ECN 011616 | A.A.C. | 08/27/10 | K.A.C. | 08/31/10 |

HOUSING:
POLYCARBONATE

Material

Dimension tolerances
unless otherwise specified

.XXXX = ± .0130

.XXX = ± .300

.XX = ± .30

.X = ± .2

∠ = ± 0.5 °

Dimension Units mm

Stripping Length:

11mm(.45 in)

Wire Range:

0.5–2.5 mm²

Solid/Stranded(VDE)

(12–22 AWG

Solid/Stranded) MAX 7

Cores

Working Temp:

–30°C(–22°F)to

110°C(230°F) (VDE)

–22°F(–30°C) to

221°F(105°C) (cULus)

Voltage:

600V(cULus)

Current:


24A

Certifications:


UL E316080, KEMA–KEUR

VDE,FIMKO,ENEC,CEBEC,

NEMKO, DEMKO

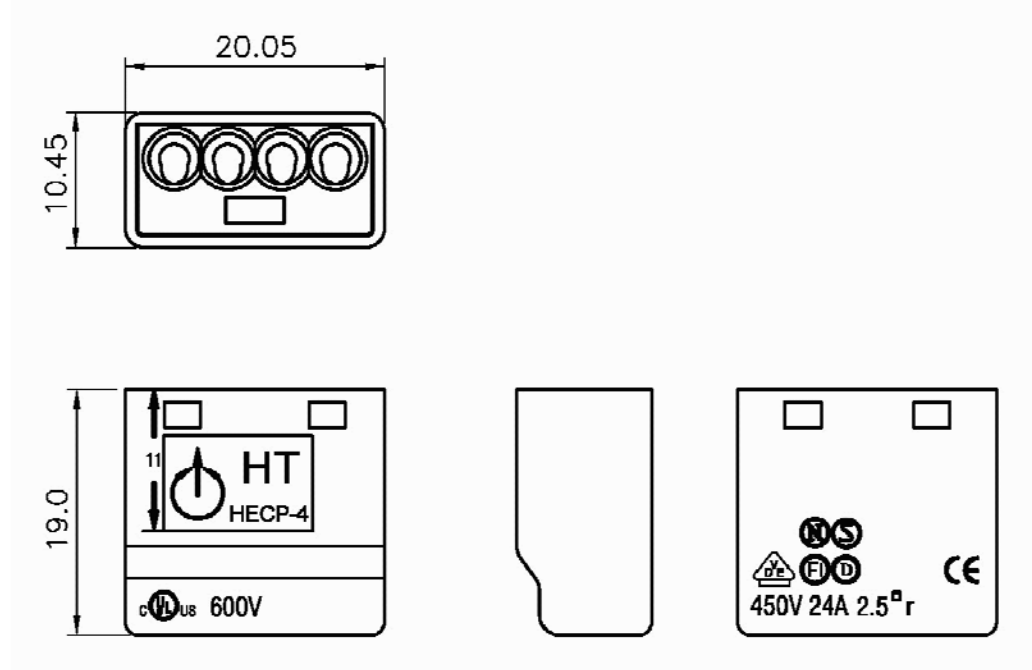

ACAD MECH
2009



Drawn

A.A.C.

08/27/10

Scale:

NTS

Computer File Number
WC\CST\XWC-HPR014CSU_01

Approved

K.A..C.

08/31/10

Title

HECP-4

Phase: Production

HELACON PLUS

PUSH-IN WIRE CONNECTOR

ALL PROPRIETARY RIGHTS IN THE
SUBJECT MATTER SHOWN ON THIS
DRAWING ARE EXCLUSIVE
PROPERTY OF HELLERMANNTYTON

HellermannTyton

7930 N. Faulkner Rd.
Milwaukee, WI 53224
Ph: (414) 355–1130
Fx: (414) 362–8342

Drawing–No

XWC-HPR014CSU

Format

AH

Sheet 1 of 1

PERFORMANCE
SPECIFICATION