

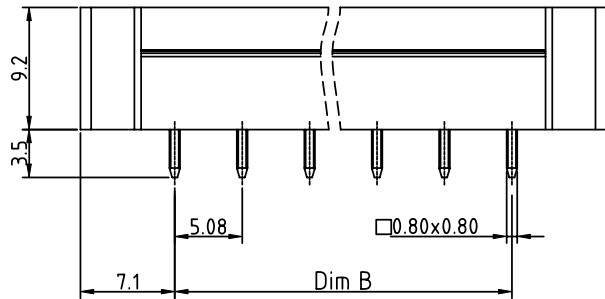
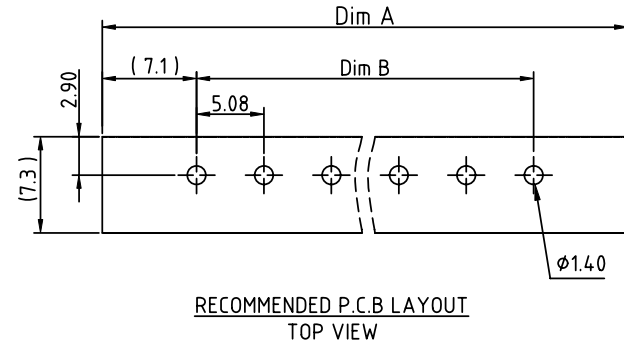



PRODUCT NUMBER	PITCH
VSxx52x000J0G	5.08 mm

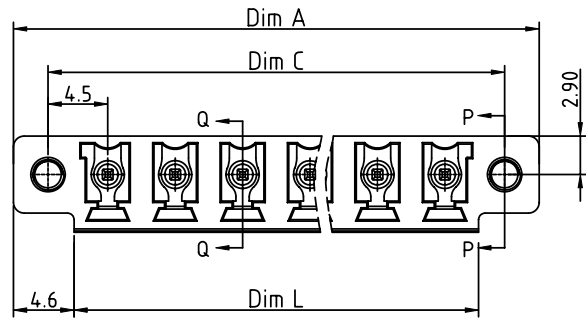

- Material:
- Item ① Male contact pin: Copper, Tin plated
  - Item ② Terminal(housing): Thermoplastic (UL94V-0)
  - Item ③ With flange nut: Brass ,M2.5
- Electrical:
- Voltage rating: 300V
  - Current rating: 10A
  - Withstanding Voltage: 1.6 KV
  - Operating temperature: -40°C to +115°C
  - Soldering temperature: 260°C±5°C/5 Sec
  - Safety Approval:

N = Number of poles  
 Dim L=Nx5.08  
 Dim A=(N-1)x5.08+14.2  
 Dim B=(N-1)x5.08  
 Dim C=(N-1)x5.08+9.0

Poles	Tolerance
2-5p	±0.15
6-10p	±0.25
11-15p	±0.30
16-24p	±0.40

PART NO.: VS xx 52 x 0 00J0 G

Solid block	0	Color		RoHS compliant
No. of poles	2			(lead<4%)
02 2 poles	3	Black (RAL9005)		In copper Alloy
03 3 poles	4	Red (RAL3001/D)		
...	5	Orange(RAL2011/P)		
24 24 poles	6	Yellow(RAL1018/A)		
	8	Green(RAL6018/T)		
	9	Blue (RAL5015/A)		
	8	Grey(RAL7035/D)		
	9	White(RAL1102)		
	C	Green(RAL6018/U)		

mat'l. code		surface ASME Y14.5	tolerance ASME Y14.5	projection	product family
ltr	ecn no	dr	date		TERMINAL BLOCK
				tolerances unless otherwise specified	title
				angles $\frac{0}{E}$	TERMINAL BLOCK
				X±0.5	PLUGGABLE SOCKET, VERTICAL, WITH FLANGE
				X.X±0.3	scale
				X*1*	X.XX±0.1
		dr	EVIN ZHONG	042214	FCI
		enr	EVIN ZHONG	042214	dwg no
		chr	HANKE FENG	042214	sheet 1 of 1
		appd	SHI JUN	042214	size
					VSxx52x000J0G
					A4
					type
					CUSTOMER Drawing
sheet index	revision	A			
	sheet	1			