
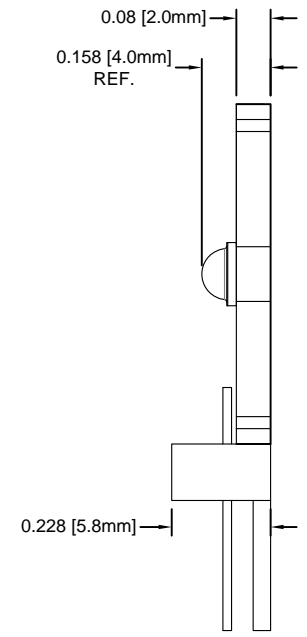


REV.	DESCRIPTION	DATE	APPROVED
F	Corrected Board Thickness	04/01/14	J. C.
G	Engineering Release	04/01/14	J. C.
H	Removed BOM	08/09/16	J. C.

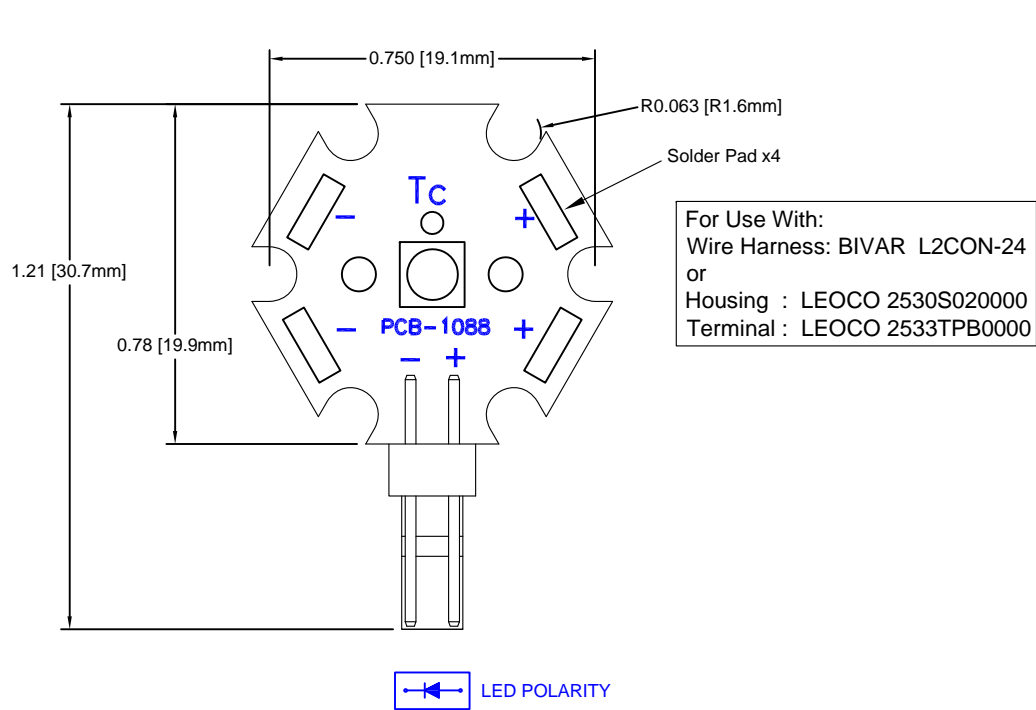

**ORDERING INFORMATION**  
**L24-TXXXXK**  
 CORRELATED COLOR TEMPERATURE  
 IN KELVIN

Part Number	LED P/N	Color	CCT (K)	Typical Luminous Flux (lm)	Philips Lumileds P/N Reference
L24-T2700K	BDL-1503	Warm White	2700	170	LXH8-FW27-5
L24-T3000K	BDL-1504	Warm White	3000	200	LXH7-FW30
L24-T4000K	BDL-1505	Neutral White	4000	210	LXH7-FW40
L24-T5000K	BDL-1506	Neutral White	5000	220	LXH7-FW50
L24-T5700K	BDL-1507	Cool White	5700	220	LXH7-FW57
L24-T6500K	BDL-1508	Cool White	6500	220	LXH7-FW65

STANDARD TOLERANCE (UNLESS OTHERWISE SPECIFIED)		 4 THOMAS, IRVINE, CA. 92618 TEL: (949) 951-8808 FAX: (949) 951-3974		
DECIMALS	ANGULAR			
.X ± .1	X° ± 1°	 <b>TITLE:</b> L24 Starboard Light Engine		
.XX ± .02				
.XXX ± .010		DESIGNED: <b>B. Oliver</b>	DATE: <b>11/07/13</b>	<b>PART NO:</b> L24-TXXXXK <b>REVISION:</b> H
		CHECKED: <b>J. Chiang</b>	DATE: <b>11/07/13</b>	
		<b>CAGE CODE : 32559</b>		<b>SHEET # 1 OF 1</b>
CAD GENERATED DOCUMENT. DO NOT MEASURE DRAWING.				