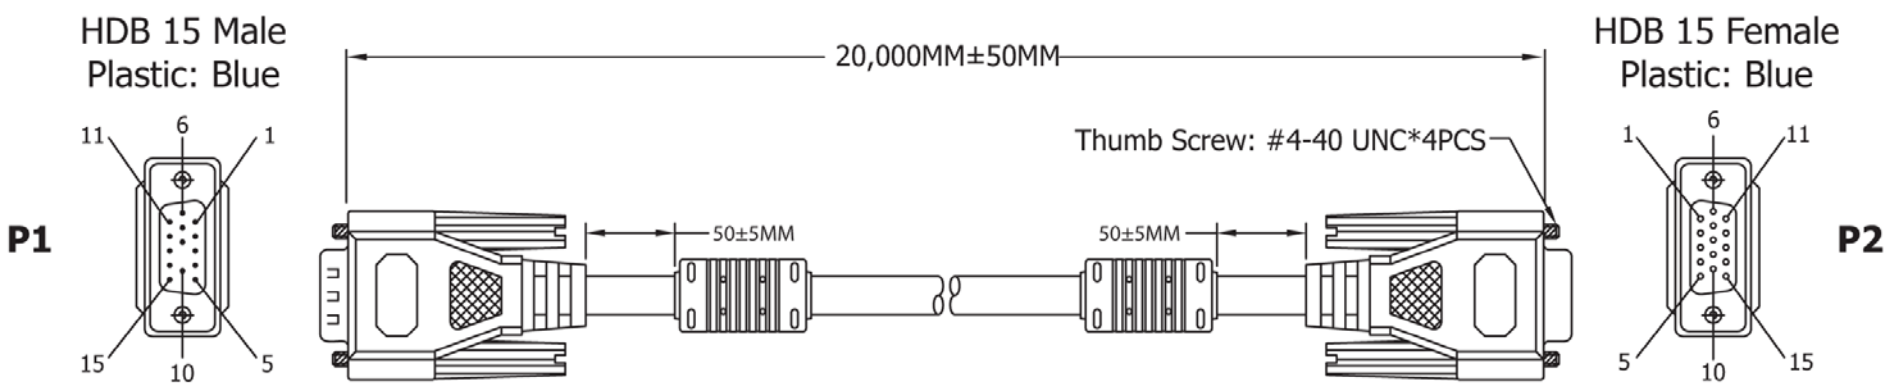

PIN OUT

P1		P2	P1		P2
1		1	10	ORANGE	10
6	RED	6	11	WHITE	11
2		2	12	YELLOW	12
7	GRAY	7	13	GREEN	13
3		3	14	RED	14
8	BLUE	8	SHELL	BRAID	SHELL
4	BROWN	4	CENTER		
5	BLACK	5	SHIELDING		

Material:

1.CABLE:28AWG(7/0.127 T.C)*3COAX(75 OHMS)+INSULATION:FO-PE INNER
JACKET:PVC OD:Ø2.5± 0.1mm(UL-1354)+28AWG(7/0.127 T.C)*7C+
INSULATION:SR-PVC ID:Ø0.85± 0.05mm(UL-1061)+AL/MY+DRAIN
WIRE:26AWG(7/0.16 T.C)+BRAID SHIELD(85%)+OUTER JACKET:PVC
COLOR:BEIGE,OD:Ø8.5± 0.15mm UL-2919

2.CONNECTOR:
P1:HDB 15P MALE,GOLD FLASH CONTACT, NICKEL PLATED SHELL
(THE 9TH PIN UNLOAD)
P2:HDB 15P FEMALE,GOLD FLASH CONTACT, NICKEL PLATED SHELL

3.FERRITE CORE:17.5*28.5*9.5mm

4.SHIELD:COPPER-FOIL 360° SOLDERED TO CONNECTOR SHELL & CABLE BRAID

5.HOOD:MOLDED TYPE,PVC 45P,COLOR:BEIGE.

6.ELECTRONIC TEST: <1>.100% OPEN SHORT & MIS WIRE TEST
<2>.CONTACT RESISTANCE 3 OHMS MAX
<3>.INSULATION RESISTANCE 20M OHMS MIN

7.PACKING:SEE P-0039 REV.C PACKING DRAWING
(HANKING SIZE MUST BE SMALLER THAN PACKING)
PACKING TYPE: DB VP4

RoHS Complaint

Scale	1:1
TOLERANCE	
X.X	±0.40
X.XX	±0.25
X.XXX	±0.15
Angle	±3°

Modification	Date	Name

		Name
Drawn	11.16.11	Chappell
Approved		

ASSMANN WSW components

Item No. **AK3920XF**

Title: Premium XGA Monitor Extension Cable - 20 Meters w/Ferrite core, HD D-Sub 15 pin Male <=> Female

Drawing No.

rev00

Replace

Sheet