

PANDUIT P/N	WEIGHT
ACB05	0.1kg

SPECIFICATION:

1. STANDARD
 OPERATING TEMPERATURE RANGE: 0°C TO 65°C [32°F TO 149°F]
 OPERATIONAL VOLTAGE: 5 ±0.1 VOLTS
 CURRENT DRAW: 30 mA MAX
 INTERFACE PLUG 1 (ACCESS HUB): H.R A2006 SERIES
 2.0mm PITCH SINGLE ROW CONNECTOR
 10 CIRCUITS
 INTERFACE PLUG 1 HOUSING MATERIAL: NYLON
 INTERFACE PLUG 1 HOUSING COLOR: WHITE
 INTERFACE PLUG 2 (ELECTONIC LOCK): HIROSE DF11 SERIES
 2.0mm PITCH DOUBLE ROW CONNECTOR
 CRIMPING SOCKER, 6 CIRCUITS
 INTERFACE PLUG 2 HOUSING MATERIAL: NYLON
 INTERFACE PLUG 2 HOUSING COLOR: BLACK


2. ADDITIONAL:
 NONE

3. ACCESSORY COMPONENTS:
 INSTALLATION GUIDE, QTY:(1)

NOTES:

1. PRIMARY DIMENSIONS ARE IN MILLIMETERS. SECONDARY DIMENSION ARE IN INCHES
 2. INSTALLATION SHALL COMPLY WITH ALL APPLICABLE NATIONAL, STATE, AND LOCAL CODES
 3. VISIT OUR ON-LINE CATALOG AT WWW.PANDUIT.COM FOR A CURRENT LIST OF PRODUCTS APPLICABLE FOR USE WITH THIS PART

IDENTIFICATION	PART NUMBER	DESCRIPTION
	ACB05	HARNESS FOR ACE01 - HOT AISLE

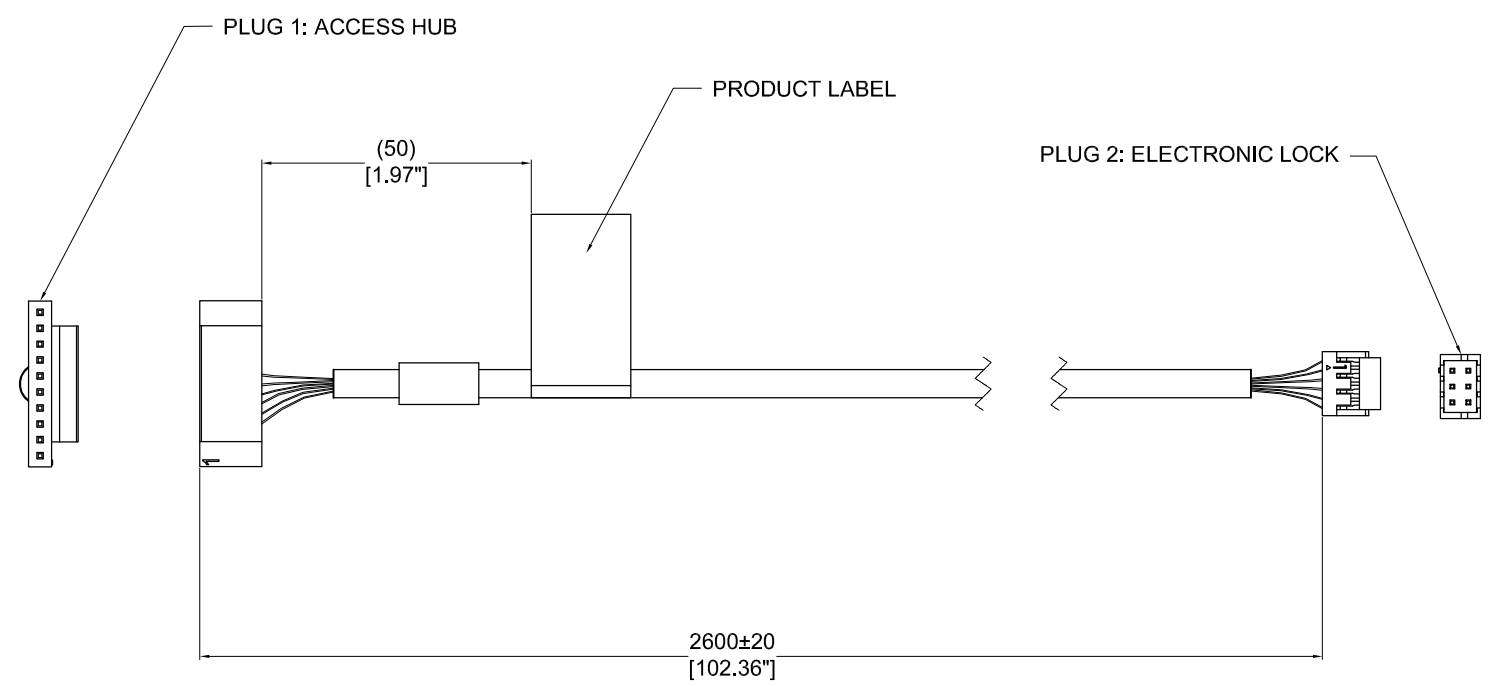

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN
00A	01/04/2018	Felix	MM	DJB	INITIAL RELEASE	ACB05

WE ASK THAT YOU CHECK FULLY THE DIMENSIONS, NOTES, AND SIGN THE CLIENT SIGNATURE BOX. THE JOB WILL NOT PROGRESS WITHOUT SIGNED APPROVAL, PLEASE DO NOT DELAY IN RETURNING PROOF AS IT WILL AFFECT DELIVERY

SIGN
 DATE
 PRINT

TITLE:
 SMARTZONE G5
 HARNESS FOR ACE01 – HOT AISLE
 CUSTOMER DRAWING

ITEM REVISION NAME:
 DATASHEET FILE NAME:

UNLESS OTHERWISE SPECIFIED
 DIMENSIONAL TOLERANCE ARE: mm [IN]
 Wire Harness
 Tolerance(mm)

THIRD ANGLE PROJECTION

0<L<500 ±10
 500<L<2000 ±20
 2000<L<6000 ±50

MATERIAL/COLOR:
 N/A

DRAWING NUMBER:
 ACB05_DC

DRAWN BY: Felix DATE: 01/04/2018 CHK: MM SCALE: NONE

SHT 1 OF 1 SCALE: B