
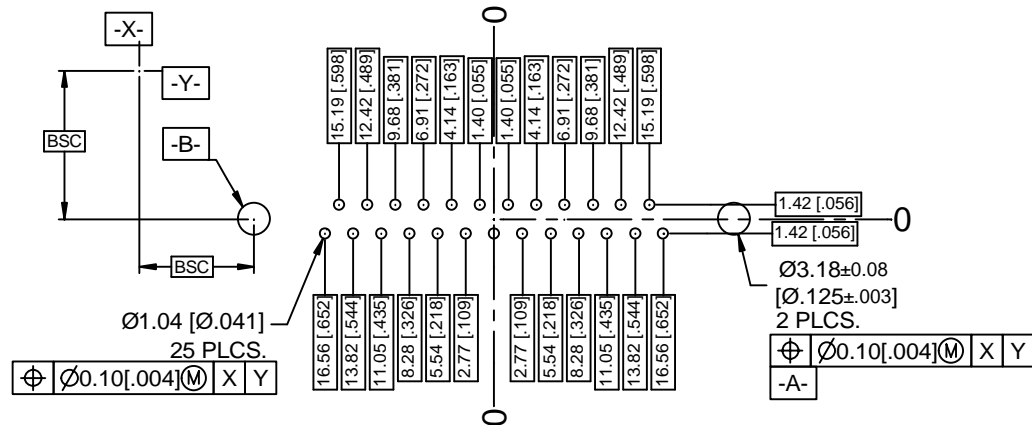



NOTES:

1. MATERIAL
HOUSING : PBT, GLASS FILLED, UL RATED 94V-0, BLACK
FRONT SHELL: CARBON STEEL
BOARDLOCKS AND INSERTS: BRASS
CONTACTS: PHOSPHOR BRONZE
2. FINISH
FRONT SHELL: TIN PLATED.
CONTACTS: GOLD FLASH IN MATING AREA OVER 2.54/m [000.100] MIN NICKEL ON ENTIRE CONTACT AREA. TIN PLATING ON SOLDER TAILS, BOARDLOCKS AND INSERTS: TIN PLATED
3. ELECTRICAL SPECIFICATION:
17-30 OHMS AT 30 MHz. TYPICAL
22-37 OHMS AT 50 MHz. TYPICAL
29-40 OHMS AT 100 MHz. TYPICAL
4. SCI, 56-424-001 AND DATE CODE MARKED ON THIS SURFACE.

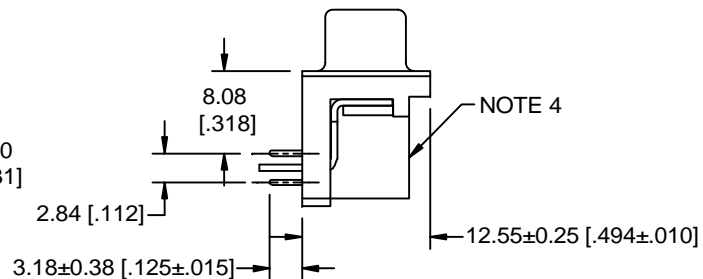

P.C. BOARD MOUNTING DIMENSIONS

| | | | | | | | | |
|--------------------------|----|----|--------|---------------|--|---------------------------------------|--|---|
| 06 | 05 | 04 | REV NO | CHANGE NOTICE | UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS [INCHES] DO NOT SCALE | TOLERANCES UNLESS OTHERWISE SPECIFIED |  SPECTRUM CONTROL INC. DW. P. Wells DATE 05-22-07 ENGR. D.HENRY SHEET 1 OF 1 | FAIRVIEW PENNSYLVANIA RECEPTACLE ASSEMBLY 25 POSITION, RIGHT ANGLE 56-424-001 |
| | | | | | | DECIMAL .X ± 0.3 [0.12] | | |
| | | | | | | DECIMAL .XX ± 0.13 [0.005] | | |
| | | | | | | DECIMAL .XXX ± | | |
| | | | | | | ANGLES ± 0° 30' | | |
| CODE IDENT. NUMBER 0LSP2 | | | | | | | | |

Quality Products From The Specialists In Electro-Magnetic Compatibility

