
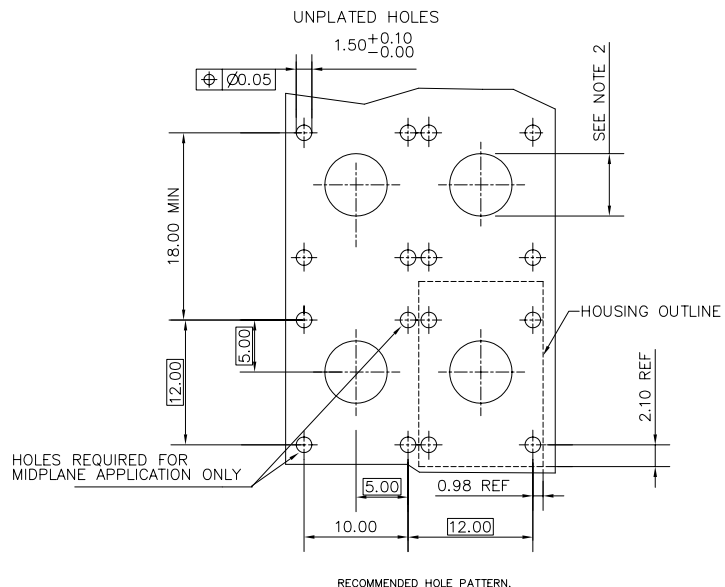




PRODUCT NUMBER  
73475-101

NOTE 5



NOTES

- ① MATERIAL: LCP, 30% GLASS FILLED, FLAME RETARDANT ACC. TO UL 94-V0  
COLOR: NATURAL
- ② - WHEN USED WITH GUIDE PIN, HOLE DIAMETER TO BE  $3.25 \pm 0.10$  AND UNPLATED  
- WHEN USED WITH STR. SCREW-TO-BOARD HIGH POWER INSERT, HOLE DIAMETER TO BE  $3.25 \pm 0.10$  AND PLATED WITH 5.00 MIN. PAD DIAMETER.  
- WHEN USED WITH A PLUG/PLUG HIGH POWER COUPLER OR A RECEPTACLE/RECEPTACLE COAX COUPLER, HOLE DIAMETER TO BE  $6.00 + 0.10 / - 0.00$  AND UNPLATED.
3. MAX. FLASH 0.1MM
4. LEAST MATERIAL CONDITION ACC. TO ANSI Y14.5

⑤. ADD "LF" SUFFIX AT THE END OF PART NUMBER FOR LEAD FREE OPTION

6. THE HOUSING WILL WITHSTAND EXPOSURE TO 260°C PEAK TEMPERATURE FOR 15 SECONDS IN A WAVE SOLDER APPLICATION WITH A 1.5mm MINIMUM THICK CIRCUIT BOARD. SEE APPLICATION NOTES/PROCEDURES IF THEY ARE AVAILABLE.
7. THIS PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATION AS DESCRIBED IN GS-22-008.

mat'l. code SEE NOTES		surface ISO 1302 ✓	tolerance ISO 406 ISO 1101	projection MM	product family METRAL (tm)	
ltr	ecn no	dr	date	tolerances unless otherwise specified	title	
A	V70831	MDF	5/19/97	angles .0±.3	HYBRID HEADER HOUSING-12MM	
B	V71431	MDF	10/2/97	linear .00±.13		
C	V00024	JWS	1/28/00	0'±2' .000±.0051		
D	M05-0200	MHT	9/21/05	dr	M.FETROW 5/19/97	
E	M06-0277	MHT	7/22/06	engr	C.PENDLETON 5/17/97	
				chr	C.PENDLETON 5/17/97	
				appd	C.PENDLETON 5/17/97	
sheet index	revision sheet	E	1		scale 1:1	
FCJ					dwg no	sheet 1 of 1 size
					73475	A3
					type	Product Customer Drawing