

Modular Plug Application Tooling

ModPlug Dual Terminator Fast Facts


- Pneumatically powered, foot pedal actuated
- Terminate two connectors at the same time
- Programmable tester — Check for shorts and opens as product is terminated. Program tester for individual positions or crossovers.
- Terminate up to 200 dual-ended cables/hr
- Interchangeable die sets — Easy changeover die sets for your particular product. Die sets have been designed to terminate all AMP modular plug products
- Steel die sets for long life
- Fully adjustable, primary strain relief, secondary strain relief and contact height
- Lightweight (36 lbs) design makes the press easy to move within work center
- Rental and purchase options available
- Compact size — 8" x 8" x 10¹/₂" tall
- 1-year limited warranty
- CE approved version available (1320840-2)
- AMP plugs are UL approved when terminated using this tool and the procedures outlined in CM 409-10010 and IS 408-9743
- Technical requirements
 - Air pressure — 80 - 100 psi
 - Air supply hose — 3/16 dia. with 1/8 NPT fitting

| Plug Style | Tooling Kit* | Base Terminator**† |
|-----------------------------|--------------|--------------------|
| 4- and 6-Position Line | 856196-1 | 1320840-1 |
| 8-Position Long Body | 856196-2 | 1320840-1 |
| 4-Position Handset | 856196-3 | 1320840-1 |
| 6-Position Long Body | 856196-4 | 1320840-1 |
| 6-Position Offset | 856196-5 | 1320840-1 |
| 8-Position High Performance | 1-856196-1 | 1320840-1 |
| 10-Position | 856196-6 | 1320840-1 |

* Purchased separately
 ** A tooling kit is needed and purchased separately.
 † -1 for US (110 volt), -2 CE approved



Modular Plug Application Tooling

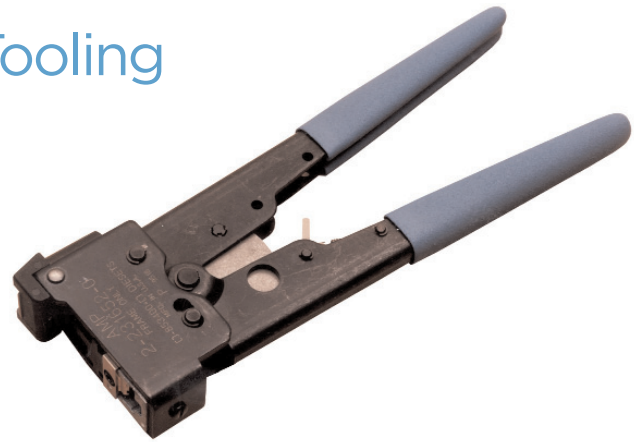

Professional Hand Tool Fast Facts


- Low handle force
- Terminates both strain reliefs and inserts contacts in one motion
- Cuts, strips and terminates
- Ratchet control insures complete termination cycle
- Interchangeable die sets terminate all plugs except 10-position
- AMP plugs are UL approved when terminated using this tool and the procedures outlined in IS 408-9767

| Plug Style | Die Set* | Hand Tool and Die Set Combo** |
|-----------------------------|------------|-------------------------------|
| 4- and 6-Position Line | 853400-8 | 2-231652-8 |
| 8-Position Long Body | 853400-1 | 2-231652-1 |
| 4-Position Handset | 853400-3 | 2-231652-3 |
| 6-Position Long Body | 853400-7 | 2-231652-7 |
| 6-Position Offset | 853400-6 | 2-231652-6 |
| 8-Position High Performance | 1-853400-0 | 3-231652-0 |
| 10-Position | — | 58560-1 |
| Frame only | — | 2-231652-0 |

* If purchased separately, ** With tooling included

ModPlug Single Terminator Fast Facts

- Terminate up to 250 connectors/hr
- Interchangeable steel die sets terminate all AMP plugs
- Compact, low cost pneumatically designed bench unit
- Independent adjustments for insertion, primary strain relief, and secondary strain relief depths
- Weighs only 13 lbs
- Compact size — 3 1/2" x 8 3/4" x 5 1/8" tall
- CE approved
- AMP plugs are UL approved when terminated using this tool and the procedures outlined in IS 408-9919
- Technical requirements
 - Air pressure — 80 - 100 psi
 - Air supply hose — 1/8 I.D. with 1/8 NPT fitting

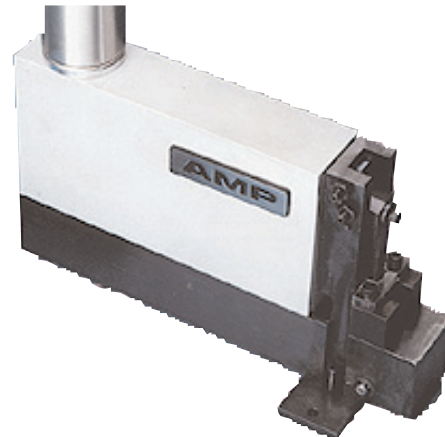

| Plug Style | Tooling Kit* | Terminator** |
|-----------------------------|--------------|--------------|
| Base Machine | N/A | 354711-1 |
| 4- and 6-Position Line | 354714-1 | 354711-2 |
| 8-Position Long Body | 354714-2 | 354711-3 |
| 4-Position Handset | 354714-3 | 354711-4 |
| 6-Position Long Body | 354714-4 | 354711-5 |
| 6-Position Offset | 354714-6 | 354711-7 |
| 8-Position High Performance | 354714-7 | 354711-8 |
| 10-Position | 354714-5 | 354711-6 |

* If purchased separately, ** With tooling included