



Aug.1.2018 Copyright 2018 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
 In case that the application demands a high level of reliability, such as automotive,
 please contact a company representative for further information.

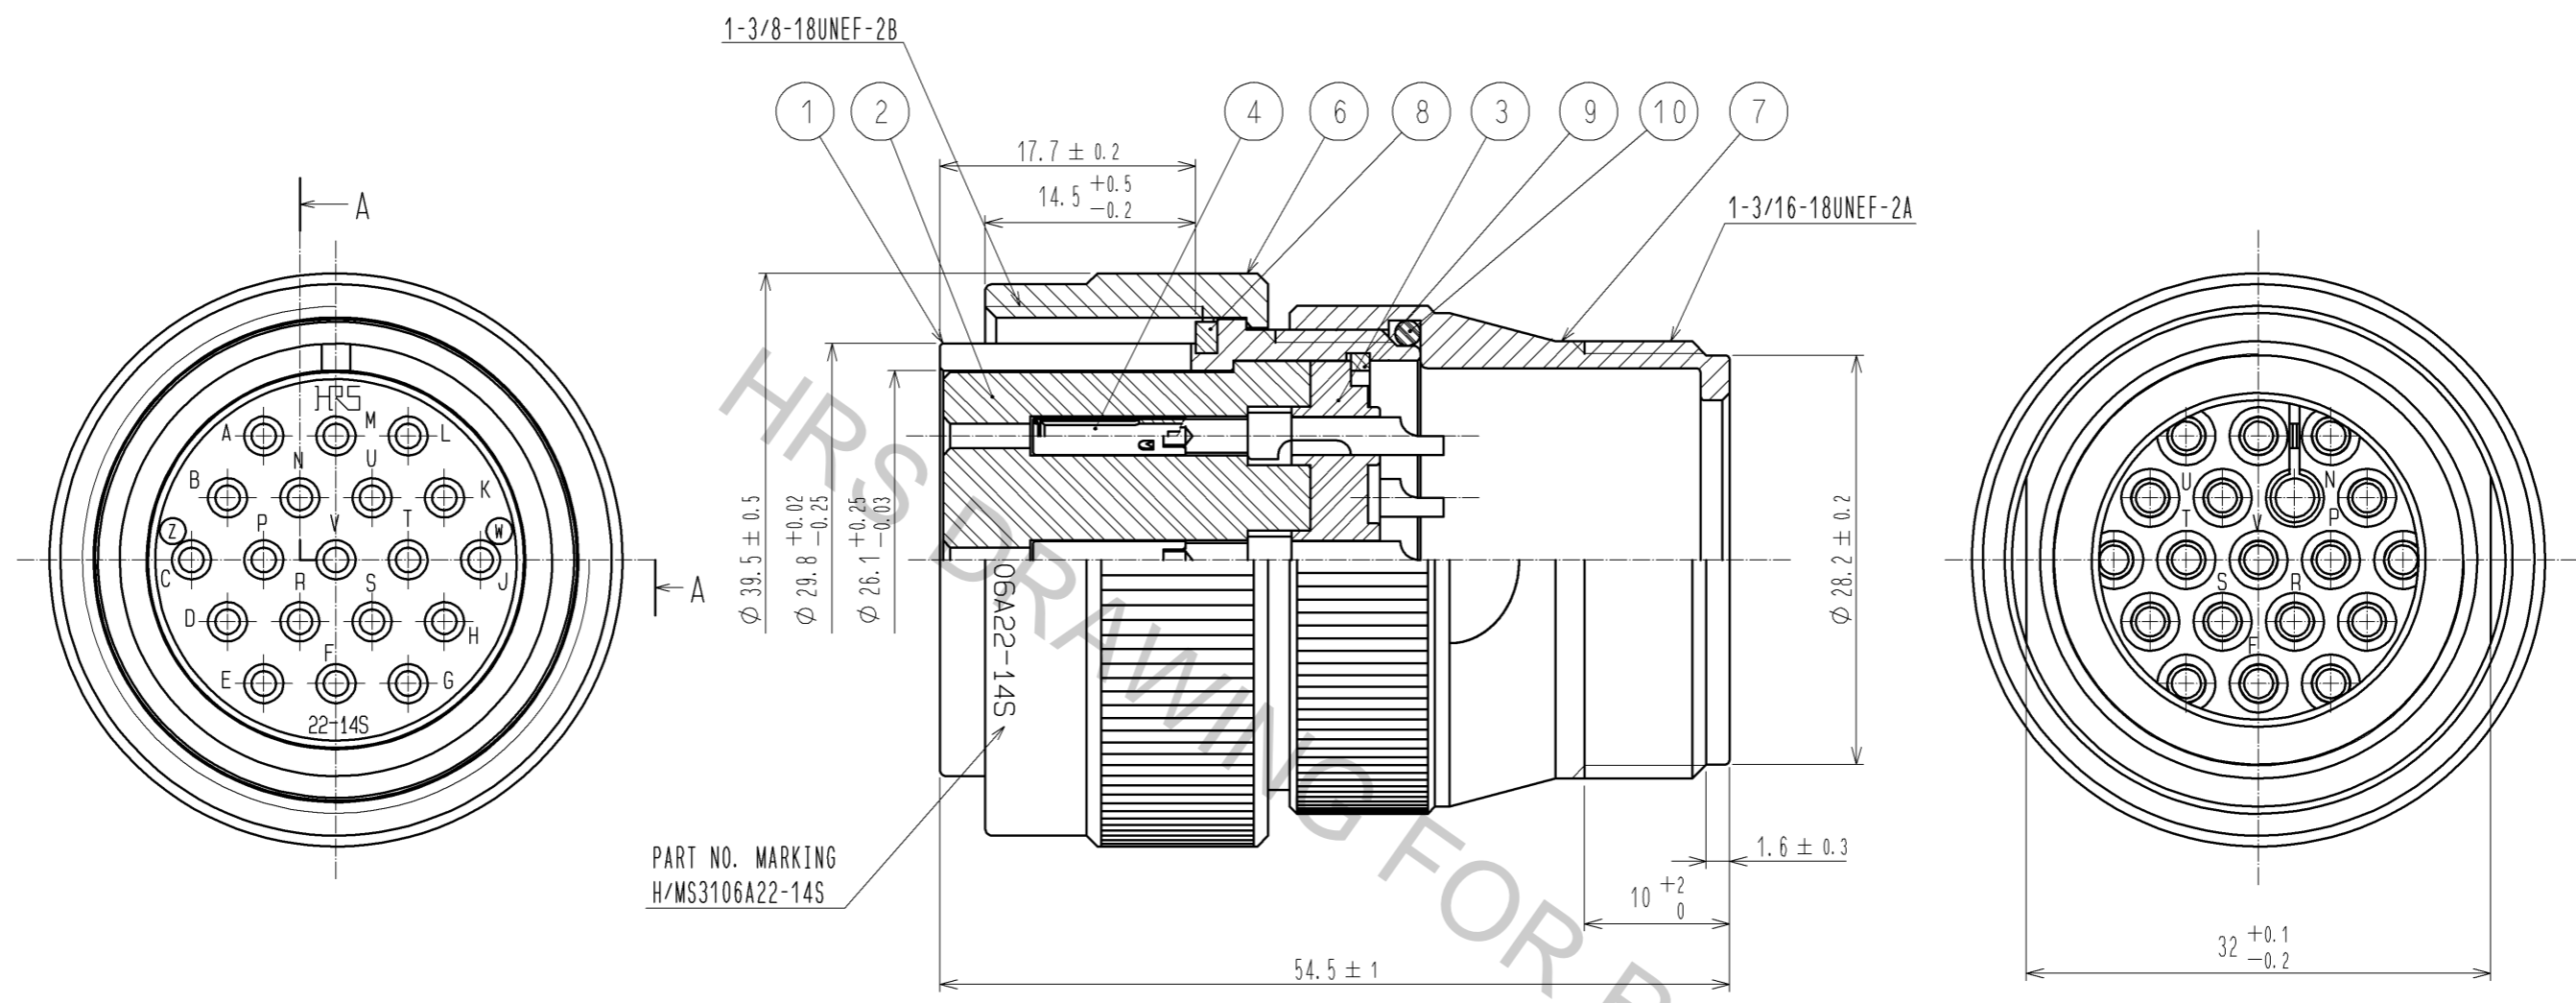

A-A

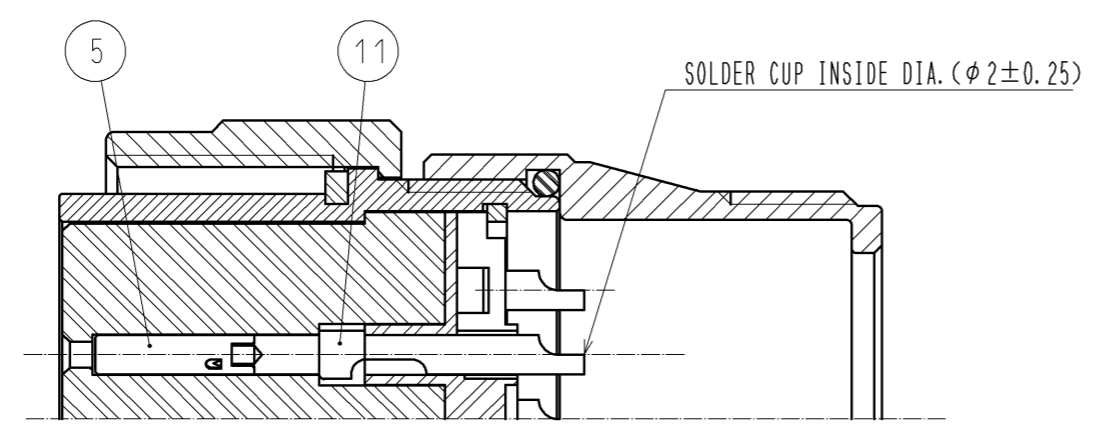

NOTE 1 ONE EXAMPLE OF THE ROTATION OF REF. NO. ⑦ TO REF. NO. ① IS SHOWN.

NO.	MATERIAL	FINISH . REMARKS	NO.	MATERIAL	FINISH . REMARKS
6	ALUMINUM ALLOY	BLACK CHROMATE TREATMENT (TRIVALENT CHROMIUM)	11	COPPER ALLOY	SILVER PLATING 2μm min.
5	STAINLESS STEEL		10	SILICONE RUBBER	(BLACK)
4	COPPER ALLOY	SILVER PLATING 2μm min.	9	PHOSPHOR BRONZE	NICKEL PLATING
3	PBT	(BLACK) UL94V-0	8	SILICONE RUBBER	(BLACK)
2	PBT	(BLACK) UL94V-0	7	ALUMINUM ALLOY	BLACK CHROMATE TREATMENT (TRIVALENT CHROMIUM)
1	ALUMINUM ALLOY	BLACK CHROMATE TREATMENT (TRIVALENT CHROMIUM)			

UNITS	SCALE	COUNT	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
mm	2 : 1	△				
APPROVED : SU. OBARA			10.10.04	DRAWING NO. EDC3-036137-73		
CHECKED : HY. KISHI			10.10.04	PART NO. H/MS3106A22-14S(73)		
DESIGNED : TH. KAMEYA			10.10.01	CODE NO. CL120-0613-2-73		
DRAWN : YS. SAKODA			10.09.29	△ 1/1		