





# EDSTLZ 951

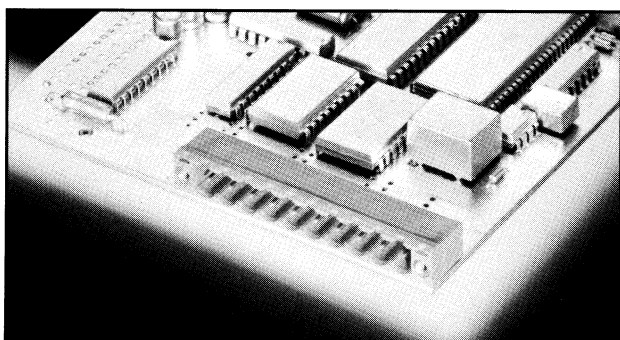

2-10 poles, Spacing 5.08 mm  
insert required no. of poles \*\*  
How to order see page 6

## Ratings:

\*Approvals pending

	 UL1059	 CSA 22.2 No. 158	 DIN VDE 0627
<b>Rated Voltage</b>	<b>250 VB</b>	<b>300 VB</b>	<b>250 V</b>
<b>Rated Current</b>	<b>15 A</b>	<b>16 A</b>	<b>12 A (T60)</b>
<b>Test Voltage</b>			<b>2.21 kV</b>

## Dimensions

Spacing	<b>5.08 mm</b>
PCB Hole Diameter	<b>1.4 mm</b>

## Materials

Insulating Material	<b>PA</b>
Flammability Class	<b>UL94 V-0</b>
Temperature Range	<b>-30°C/+105°C</b>
Contact Pin	<b>Cu</b>
Color	<b>Green</b>

