



.156±.005 HEX

NOTES:
1. HARDWARE IS INCLUDED.

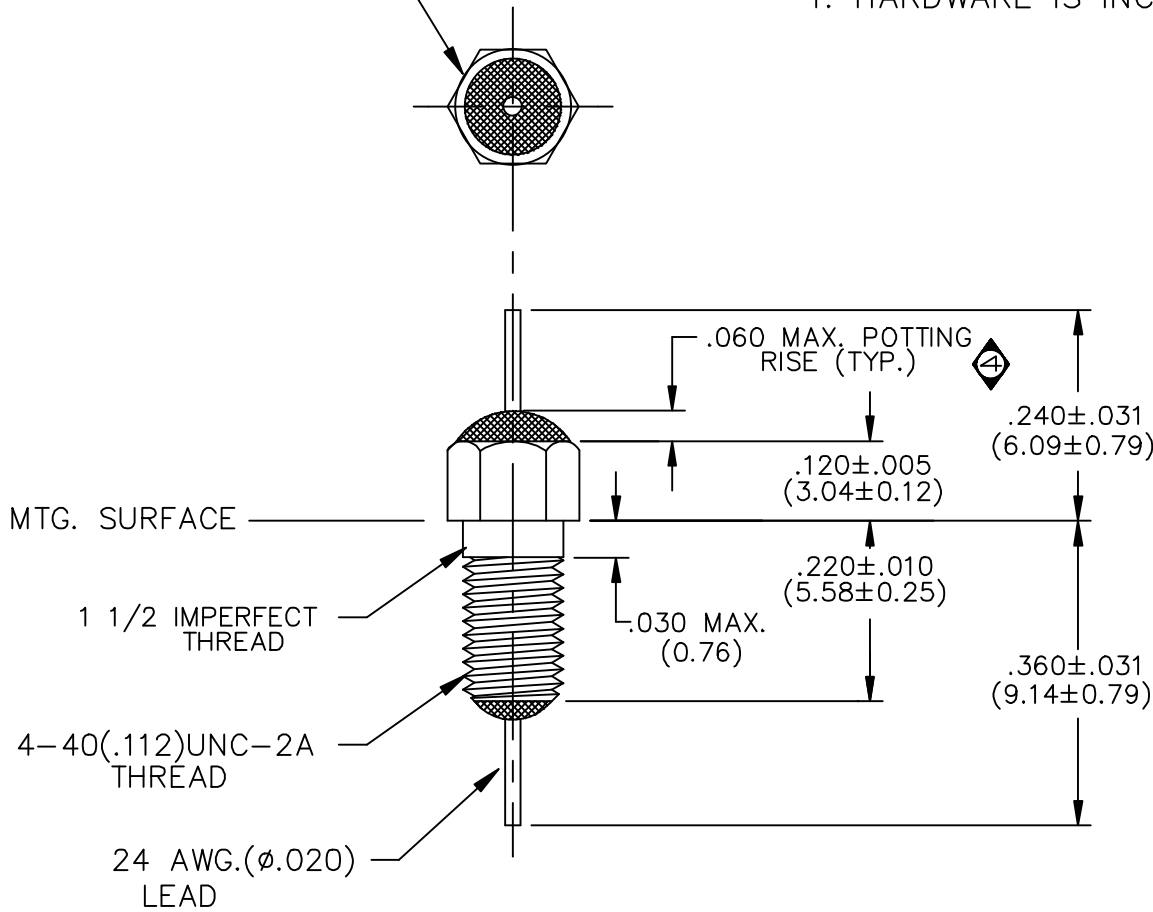

LEAD FINISH:	SOLDER
BUSHING FINISH:	SILVER
CAPACITANCE	.0001uF GMV
TEMP. RANGE	-55°C TO 125°C
CURRENT	10 AMP MAX.
WORKING VOLTAGE	125°C 200VDC MAX.
D.C. RESISTANCE	N/A ohms MAX.

SCHEMATIC



MARKING:

PART: S101
BAG: SCI-9120-101
DATE CODE
LOT NO.
QTY./BAG (200 MAX.)

04	03	02	01	REV. NO.	TOLERANCES UNLESS OTHERWISE SPECIFIED
CN 207332	CN 206516	CN 202532	CN 169191 REDRAWN	CHANGE NOTICE	Fractions ± 1/64
					Dec. .xx±
					Dec. .xxx±.010
					Angles ±0° 30'
					CODE IDENT. NO. QLSP2



SPECTRUM CONTROL INC.

ERIE, FAIRVIEW
PENNSYLVANIA

Dwn. M.KEVERLINE
Ckd. 5/28/02

Description FEED THRU
RESIN SEAL FILTER

Apvd.
Scale NONE

SCI-9120-101