


LOC	DIST	REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APVD
H	-	A	ECR-05-010922	13SEPT05	RvH MvD

P.C.B. HOLE DIM. ACTION PIN	
DRILLED HOLE	: 1,60 ± 0,025 mm
FIN. HOLE	: 1,39 to 1,54 mm
AFTER REFLOW	: 1,37 to 1,54 mm
Cu-thks	: 0,025 to 0,075 mm
SnPb-thks	: 0,004 to 0,010 mm

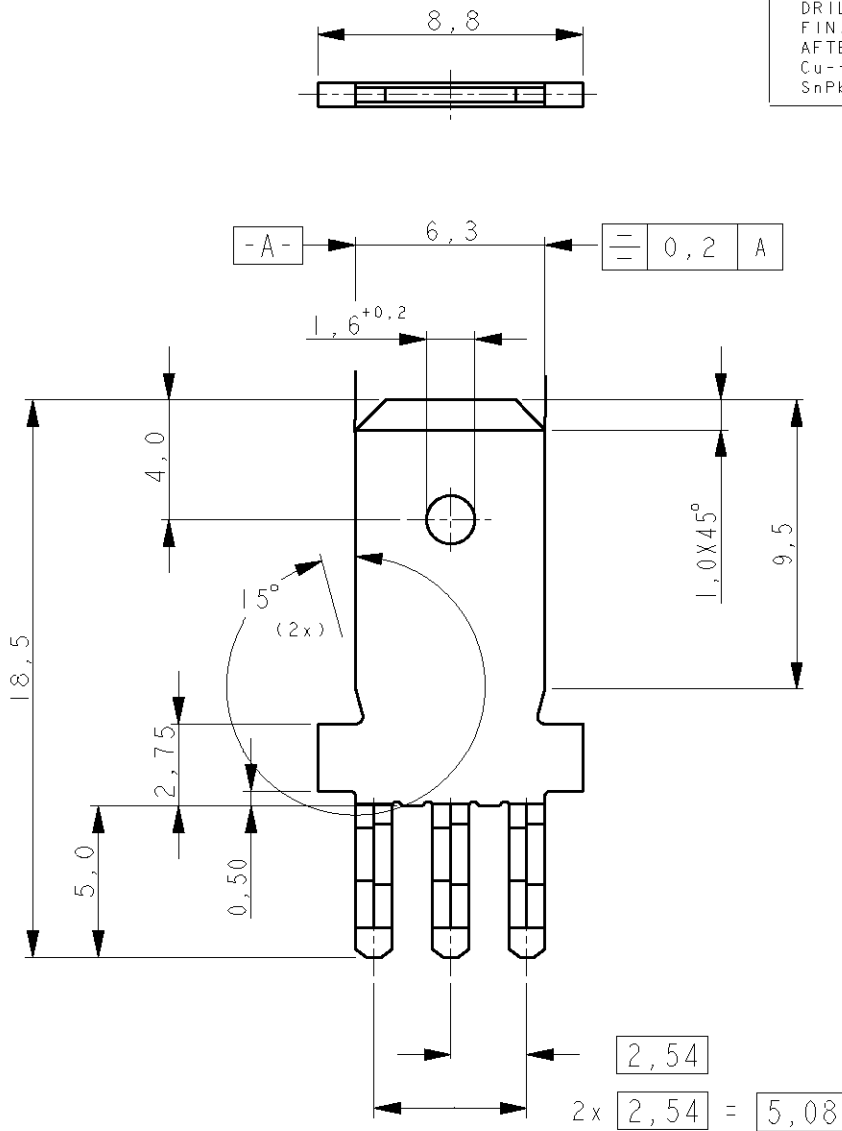

(2,4-3,2 P.C. BOARD THICKNESS.)

2,54 μ M MIN. SN ALL OVER.	PHOSPHORBRONZE	100278-1
FINISH	MATERIAL	PARTNUMBER

RELEASED FOR PUBLICATION

THIS DRAWING IS UNPUBLISHED.

BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

REV A

COPYRIGHT

DIMENSIONS: mm	DWN	28-02-91	MATERIAL	FINISH		
	Rv	LOKVEN	-	-		
TOLERANCES UNLESS OTHERWISE SPECIFIED:	CHK	13SEPT05	TYCO ELECTRONICS NEDERLAND B.V. 's-HERTOGENBOSCH, THE NETHERLANDS			
	Mv	DRIEL				
0 PLC ±-	APVD	13SEPT05	NAME .250 SERIES TAB WITH ACTION PIN FOR POSITIVE LOCK RECEPTACLE			
1 PLC ±-	Mv	DRIEL				
2 PLC ±-	PRODUCT SPEC	-	SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
3 PLC ±-	APPLICATION SPEC	-	A4	00779	C=100278	-
4 PLC ±-	WEIGHT	-	CUSTOMER DRAWING			
ANGLES ±-			SCALE	SHEET	OF	REV
			-	69	1	A