


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT - By - ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APVD
AF	50	C	REVISED PER ECR-12-005303	24JUL12	KH KR

- 1 MATES WITH .020±.001x.205 TAB
- 2 WIRE STRIP LENGTH .281
- 3 INSULATION SIZE .135 MAX DIA
- 4 CONTINUOUS STRIP ON REELS
- △5 DIMENSION DOES NOT INCLUDE TRIM BURR
- △6 .015 MAX CARRIER TRIM BURR PER SIDE IS ALLOWABLE IN THE SHADED AREA

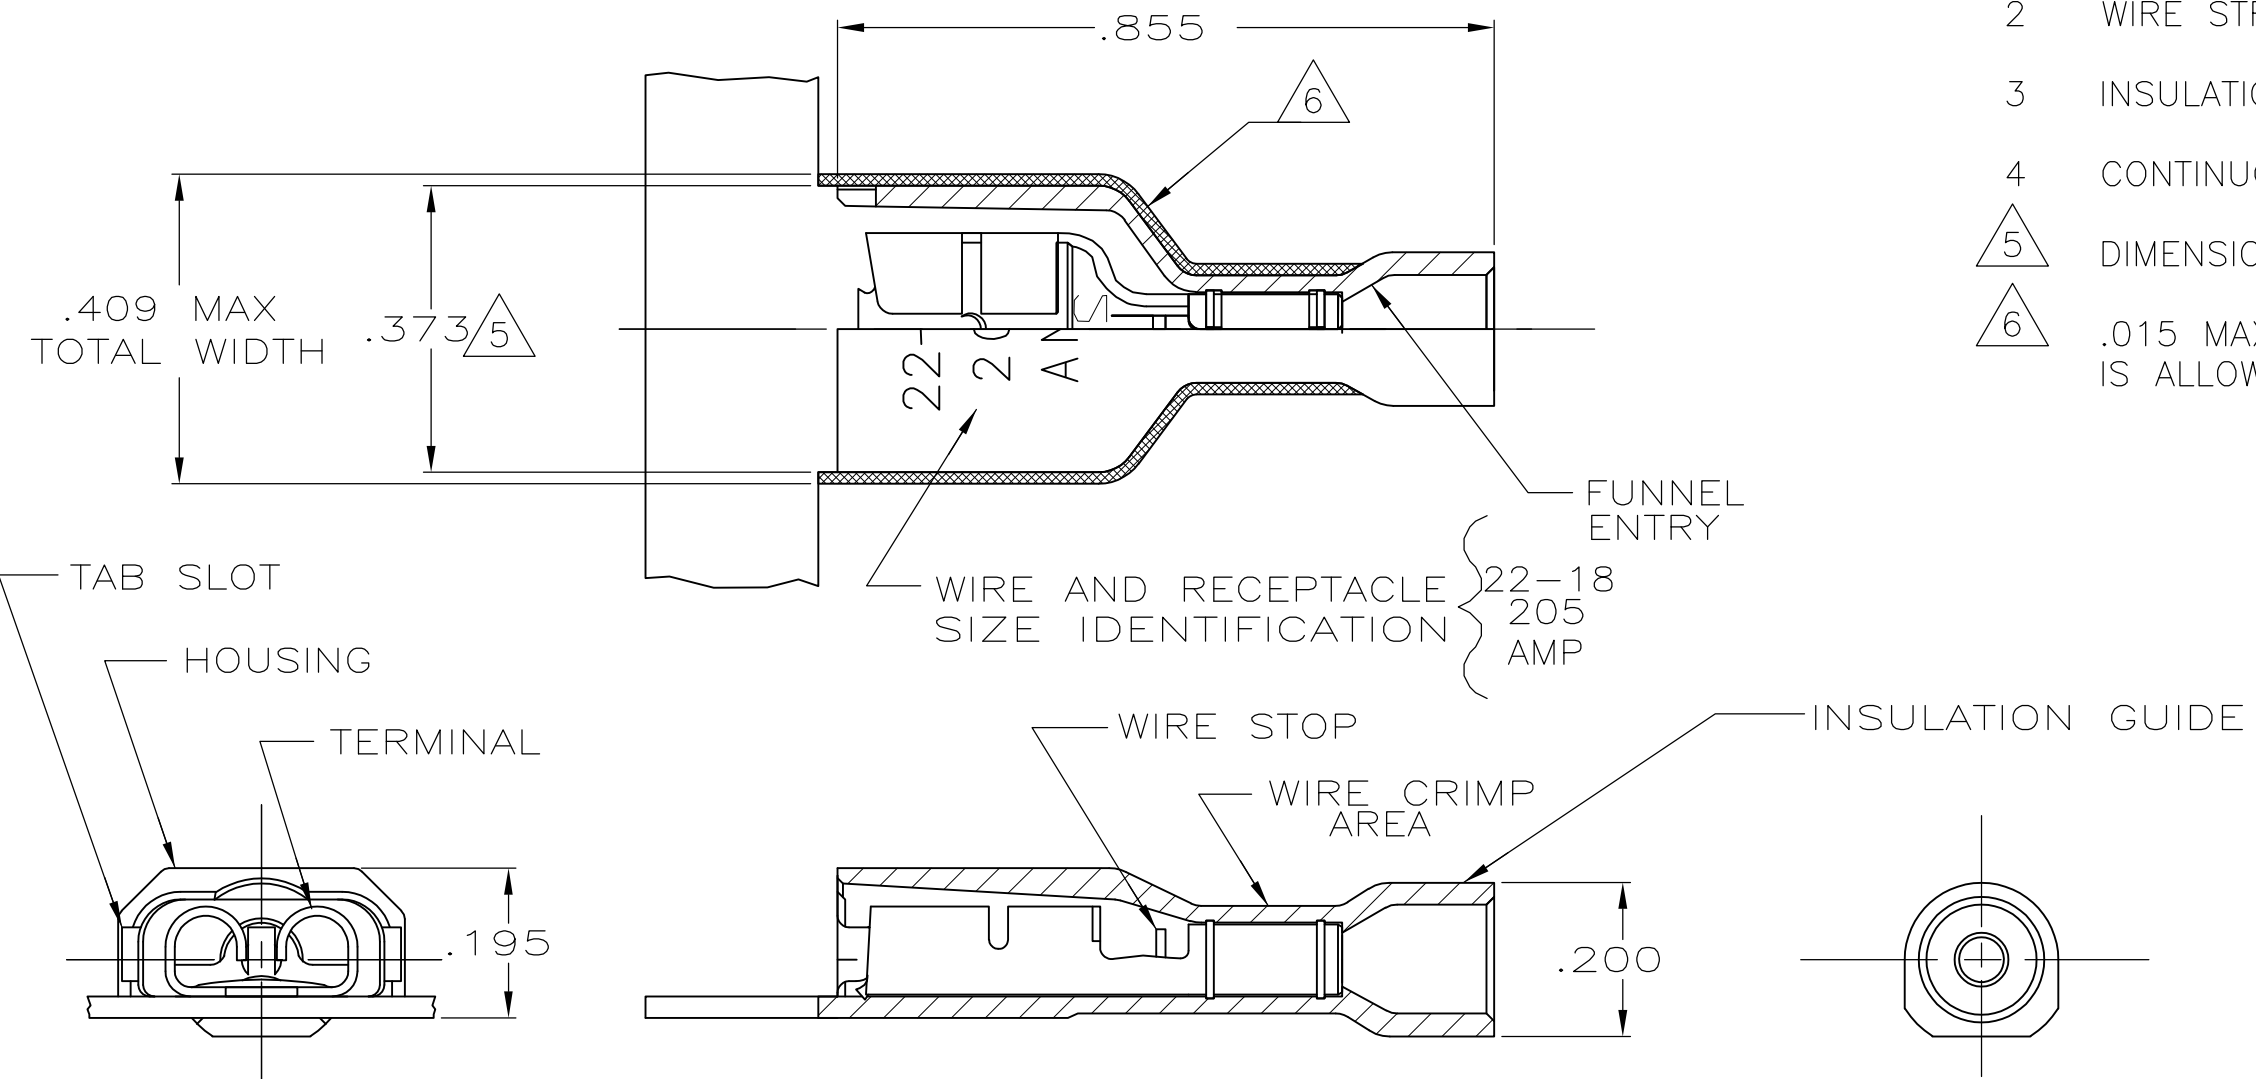

STANDARD	HOUSING: NYLON, COLOR-RED TRANSLUCENT RECEPTACLE: #3 HARD BRASS, TIN	2-521406-2
PACKAGING	MATERIAL & FINISH	PART NUMBER
THIS DRAWING IS A CONTROLLED DOCUMENT.		TE Connectivity RECEPTACLE ASSY, ULTRA-FAST, .205 SERIES, 22-18 AWG
DIMENSIONS: INCHES	TOLERANCES UNLESS OTHERWISE SPECIFIED:	
MATERIAL	FINISH	
SEE TABLE	SEE TABLE	
DWN JR RUTH 12APR01 CHK MS FEHER 12APR01 APVD J HUMMEL 12APR01 PRODUCT SPEC 108-2043 APPLICATION SPEC 114-2123 WEIGHT -		NAME SIZE CAGE CODE DRAWING NO RESTRICTED TO A3 00779 C-521406 -
CUSTOMER DRAWING		SCALE 4:1 SHEET 1 OF 1 REV C