


PART NUMBER	ITEM ① BODY	ITEM ② CONTACT	ITEM ③ INSULATOR
141-0701-611	STAINLESS STEEL GOLD PL .00001 MIN OVER NICKEL PL .00005 MIN	BERYLLIUM COPPER GOLD PL .00005 MIN OVER NICKEL PL .00005 MIN OVER COPPER PL .00005 MIN	TEFLON
141-0701-612	STAINLESS STEEL PASSIVATED	BERYLLIUM COPPER GOLD PL .00005 MIN OVER NICKEL PL .00005 MIN OVER COPPER PL .00005 MIN	TEFLON

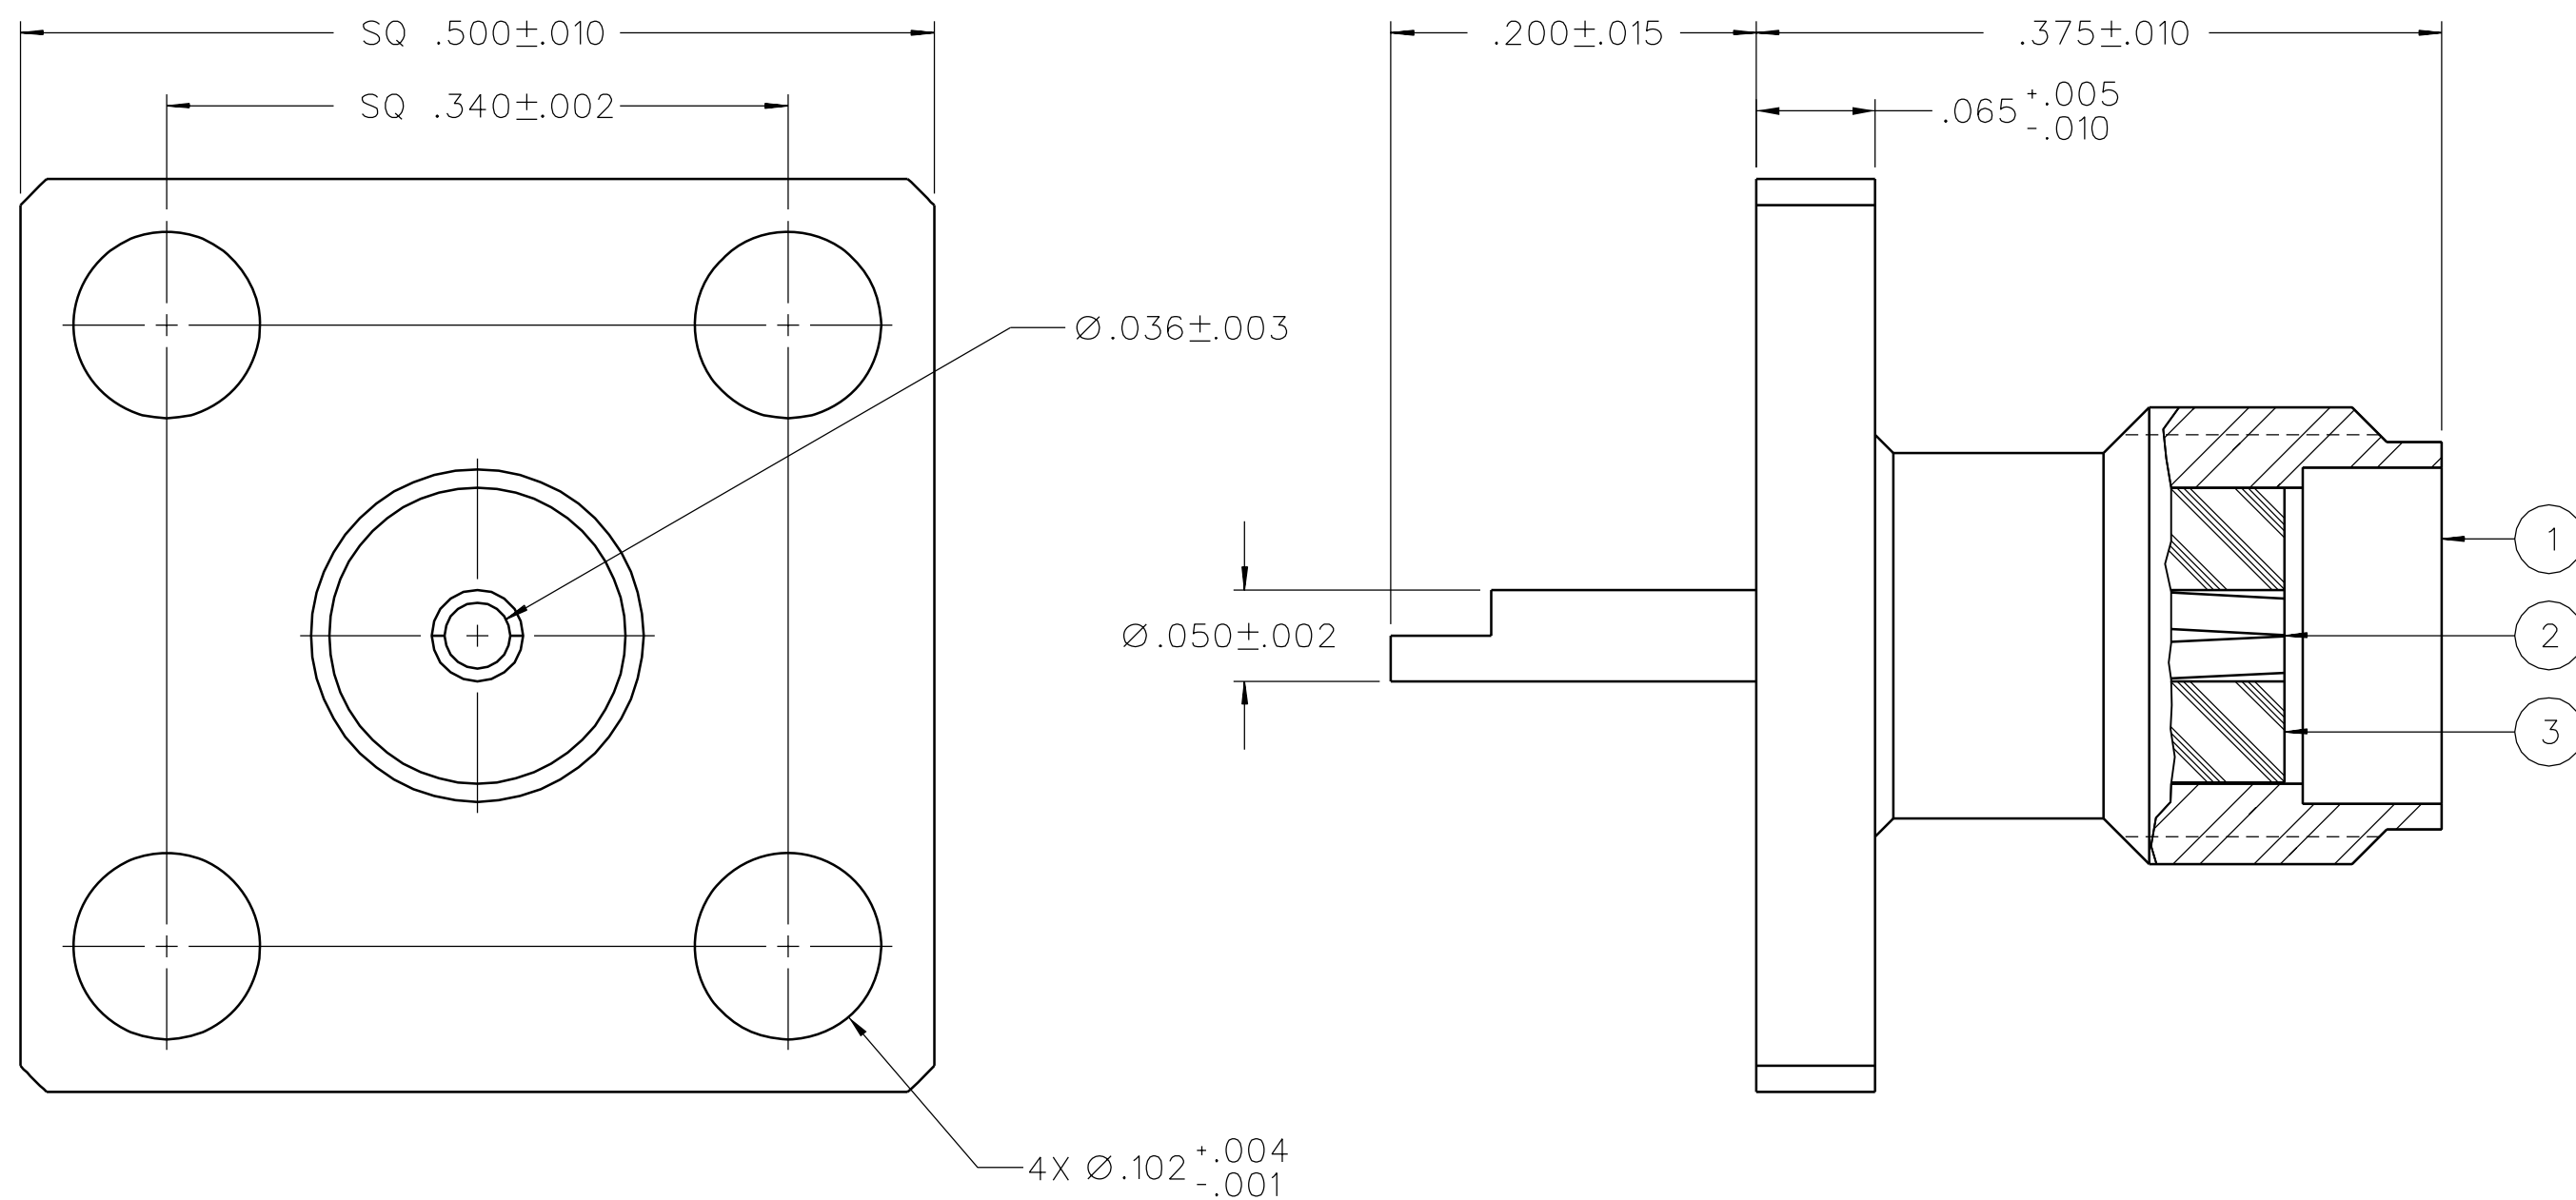

NOTES:

1. SPECIFICATIONS:

IMPEDANCE: 50 OHMS
 FREQUENCY RANGE: 0-18 GHZ
 VSWR: NOT APPLICABLE
 WORKING VOLTAGE: 335 VRMS MAX AT SEA LEVEL
 DIELECTRIC WITHSTANDING VOLTAGE: 1000 VRMS MIN AT SEA LEVEL
 INSULATION RESISTANCE: 5000 MEGOHM MIN
 CONTACT RESISTANCE:
 CENTER CONTACT - INITIAL 3.0 MILLIOHM MAX, AFTER ENVIRONMENTAL 4.0 MILLIOHM MAX
 OUTER CONDUCTOR - INITIAL 2.0 MILLIOHM MAX AFTER ENVIRONMENTAL NOT APPLICABLE
 BRAID TO BODY - NOT APPLICABLE
 CORONA LEVEL: 250 VOLTS MIN AT 70,000 FEET
 INSERTION LOSS: NOT APPLICABLE
 RF LEAKAGE: NOT APPLICABLE
 RF HIGH POTENTIAL WITHSTANDING VOLTAGE: 670 VRMS MIN AT 4 AND 7 MHZ

MECHANICAL:

ENGAGE/DISENGAGE TORQUE: 2 IN-LBS MAX
 MATING TORQUE: 7-10 IN-LBS
 COUPLING PROOF TORQUE: NOT APPLICABLE
 COUPLING NUT RETENTION: NOT APPLICABLE
 CONTACT RETENTION: 6 LBS MIN AXIAL FORCE
 4 IN-OZ MIN RADIAL TORQUE
 CABLE ACCEPTABILITY: NOT APPLICABLE
 CABLE HEX CRIMP SIZE: NOT APPLICABLE
 CABLE RETENTION: NOT APPLICABLE
 DURABILITY: 500 CYCLES MIN

ENVIRONMENTAL:

(MEETS OR EXCEEDS THE APPLICABLE PARAGRAPH OF MIL-PRF-39012)
 THERMAL SHOCK: MIL-STD-202, METHOD 107, CONDITION B EXCEPT 200° C HIGH TEMP
 OPERATING TEMPERATURE: -65 DEG C TO 165 DEG C
 CORROSION: MIL-STD-202, METHOD 101, CONDITION B
 SHOCK: MIL-STD-202, METHOD 213, CONDITION I
 VIBRATION: MIL-STD-202, METHOD 204, CONDITION D
 MOISTURE RESISTANCE: MIL-STD-202, METHOD 106

DRAWING NO.
C - 141-0701-611/620

0 REVISIONS

ENGINEERING RELEASE

01	01-08-90	EJ	GR	AW	01-12-90
					ECO 24304

ADDED: MOISTURE RESISTANCE SPEC.
 CHANGED: .195±.015 WAS .200±.015
 DIA .036±.005 WAS .025±.003

02	02-27-90	EJ	GR	AW	03-08-90
					ECO 24434

ADDED: 200° C HIGH TEMP TO THERMAL SHOCK SPEC.
 CHANGED: .200±.015 WAS .195±.015
 .065+.000-.010 WAS .065±.010
 .340±.002 WAS .340±.010.
 DIA .036±.003 WAS .036±.005.
 DIA .102+.004-.001 WAS .102±.003.
 FREQUENCY RANGE 0-18 WAS 0-8

03	05-22-90	EJ	GR	AW	6-6-90
					ECO 24657

CHANGED: UPDATED GRAPHICS.

4	7-7-90	EJ	GR	AW	7-16-90
					ECO 24759

CHANGED: DIA .050±.002 WAS DIA .050±.001, RF HIGH POT 4 AND 7 MHZ WAS 5 MHZ

5	3-10-92	RH	GR	AW	ECO 40874
---	---------	----	----	----	-----------

VERSION UPDATE


6	12-29-05	SA	GR	PD	4-3-06
					ECN 50145

CUSTOMER DRAWING

THIS DRAWING TO BE INTERPRETED PER ASME Y 14.5M - 1994

"μSTATION"

COMPANY CONFIDENTIAL

TOLERANCE UNLESS OTHERWISE SPECIFIED		DRAWN BY <i>EJ</i>	DATE 8-15-89	 Cinch CONNECTIVITY SOLUTIONS a bel group	Cinch Connectivity Solutions P.O. Box 1732 Waseca, MN 56093 1-800-247-8256	
DECIMALS	mm	CHECKED BY	DATE		TITLE JACK ASSEMBLY, FLANGE MOUNT SMA	
.XX	_____	APPROVED BY RJB/GLD	DATE 1-9-90	SHEET	DRAWING NO. C - 141-0701-611/620	
.XXX	_____	RELEASE DATE	1-12-90	2 OF 2		
MATL	_____	U/M	INCH	SCALE	10:1	
FINISH	_____					