



UNCONTROLLED DOCUMENT


CLS-T	
REV.	E.C.N. NUMBER
A	E.C.N. #11148.

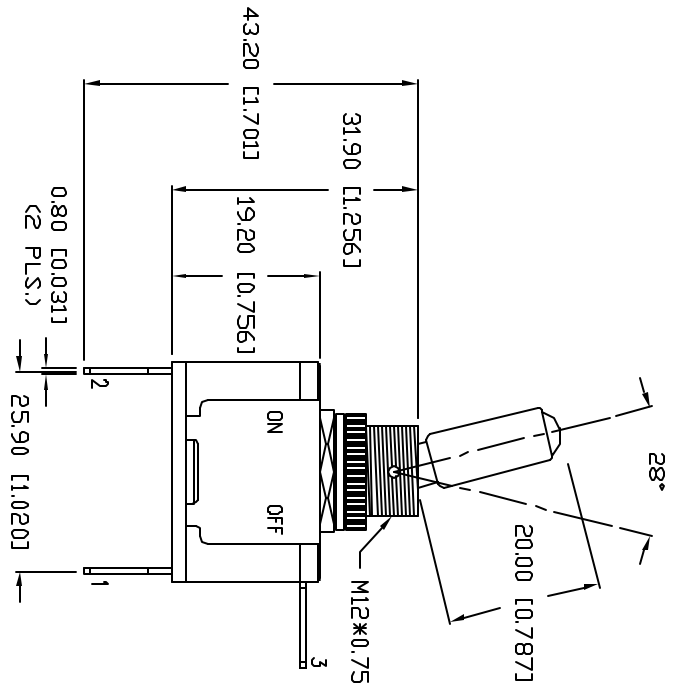

CHARACTERISTICS
RATING
LED COLOR
CIRCUIT OPERATION
NO. OF PINS
SWITCH OPERATION

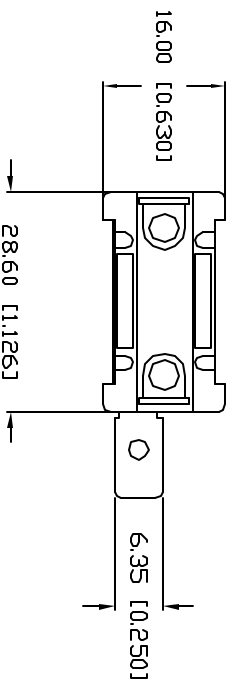

PANE  
 $\varnothing 12.20$  [0.480] -  
 1.50 [0.059]



\*UNLESS OTHERWISE SPECIFIED TOLERANCES PER DECIMAL PRECISION ARE: X+1 (±0.030), XX+0.5 (±0.020), XXX+0.25 (±0.010), XXXX+0.127 (±0.005), LEAD SIZE+0.06 (±0.002), LEAD LENGTH-

REV. A  
 PART NUMBER  
 CLS-TC11A12250G

GREEN LED ILLUMINATED TOGGLE SWITCH,  
 RATED FOR 20A AT 12VDC.

CONFIDENTIAL INFORMATION  
 THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF LUMEX INC. EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY LUMEX INC., THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN WHOLE OR IN PART FROM DISCLOSURE AND DISSEMINATION TO ALL THIRD PARTIES.  
 RELIABILITY NOTE  
 OUR MANY YEARS OF EXPERIENCE DATA ACCUMULATION INDICATE THAT SOLDER HEAT IS A MAJOR CAUSE OF EARLY AND FUTURE FAILURE.  
 IN SOLDER SNA, ATTENTION TO VOID MINIMIZATION IS ADVISED.

UNICON

DRAWN BY: CHECK