

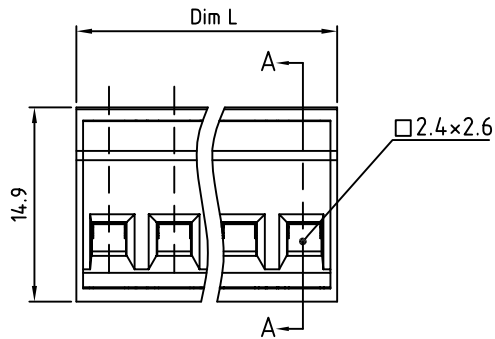


SIGN	DATE	DESCRIPTION	APPROVER
<i>THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!</i>			

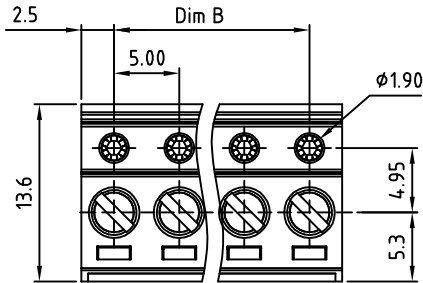

N=Number of poles



SECTION A-A

Material

- Insulating body Thermoplastic (UL94V-0)
- Insulating cover Thermoplastic (UL94V-0)
- Terminal screw Steel Zinc plating M3
- Terminal body(house) Brass, Ni plated
- Wire guard PhBz , Tin plated

Electrical

- Voltage rating: 300V
- Current rating: 15A
- Wire range:
 - Solid wire(AWG): 12-28
 - Stranded wire(AWG): 12-28
- Torque: 4.5Lb-In
- Screw: M3
- Wire strip length: 5-6mm
- Withstanding Voltage: 1.6KV
- Operating temperature: -40°C to +115°C
- Safety Approval: us

RoHS Compliant

PART NUMBER:

OSTEOXX0102

- No. of Poles
- 02 2 Poles
 - 03 3 Poles
 -
 - 124 12 Poles

- COLOR
- 0: Black (Standard)
 - 5: Green
 - 6: Blue
 - 8: Grey

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ON-SHORE TECHNOLOGY, INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ON-SHORE TECHNOLOGY, INC.

Dim L=N×5.0
Dim B=(N-1)×5.0

Poles	02	03	04	05	06	07	08	09	10	11	12	
Dim L	10.00	15.00	20.00	25.00	30.00	35.00	40.00	45.00	50.00	55.00	60.00	
Dim B	5.00	10.00	15.00	20.00	25.00	30.00	35.00	40.00	45.00	50.00	55.00	
TOL	±0.10				±0.15				±0.20			



TITLE		OSTEO 5.0 series (A type 1.90mm)											
PART NO.		OSTEOXX0102					DWG NO.		OSTEOXX0102.DWG				
APPROVED		CHECKED	DESIGNED	DRAWN		CUST NO.							
			Jacke 2009.02.23	Jacke 2009.02.23								UNIT: mm	Tolerance
								SCALE: NONE	X.X	±0.30			
								REV: B	X.XX	±0.10			
								SHEET: 01/01	X°	±1°			