


1. Wiring Diagram.

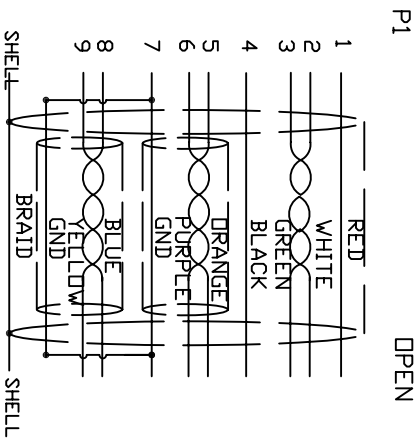

2. Cable test condition :

Open / Short : 100%

Insulation resistance : 5M ohms

Contact resistance : 2 ohm

Hipot : DC 300V / 1 sec

3. Each pcs with PE polybag.

4	PVC	45P PVC BLACK OVERMOLD	12g		
3	PE	LLDPE 500026 6201	8g		
2	CONN	USB3.0 B/M G/F BLUE	1	P1	
1	CABLE	《28AWG (7/0.12TC) *1P+D(7/0.10TC)+AL+M》*2+28AWG (7/0.12TC) *1P+24AWG(7/0.2TC)*2C+A+D+B (96/0.12AM) OD5.5 BLACK	1	2000mm	
NO.	PART NO.	DESCRIPTION			
		BILL OF MATERIAL			

A	INITIAL RELEASE	2014/08/28
REVECN#	DESCRIPTION	DATE
	<b>Cnc Tech, LLC</b>	
DRAWN	WENC	DATE
08/24/14		
CHECKED	EDWIN	DATE
08/24/14		
APPROVAL		
P/N:	103-1043-BL-00200	REV
TITLE	CABLE 3.0 USB B MALE TO OPEN END	A
CUSTOMER P/N:		
CUSTOMER:		
SHEET	1 OF 1	