

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION ,19 .

© COPYRIGHT 19 BY AMP INCORPORATED. ALL INTERNATIONAL RIGHTS RESERVED.


LOC CH DIST 11 P F

REVISIONS				
ZONE	LTR	DESCRIPTION	DATE	APPD
	D	EC 0B20-0791-98	30/JUN/98	DAP
	C	EC 0B20-0671-98	27/MAY/98	RNP
	B	EC 0B20-0503-98	09/APR/98	RNP
	A	ECN 95011203	01-12-95	CMS



5 FINISH: 200 MICROINCHES MIN. SILVER OVER 40 MICROINCHES MIN. NICKEL.

6. ALL DIMENSIONS ARE REFERENCE ONLY.

- 1 MATERIAL: COPPER ALLOY
- 2 FINISH: 30 MICROINCHES MIN. GOLD OVER 50 MICROINCHES MIN. NICKEL.
- 3. WIRE BARREL WILL ACCEPT #8 AWG WIRE
- 4. MATES WITH AMP P/N 193990-X.

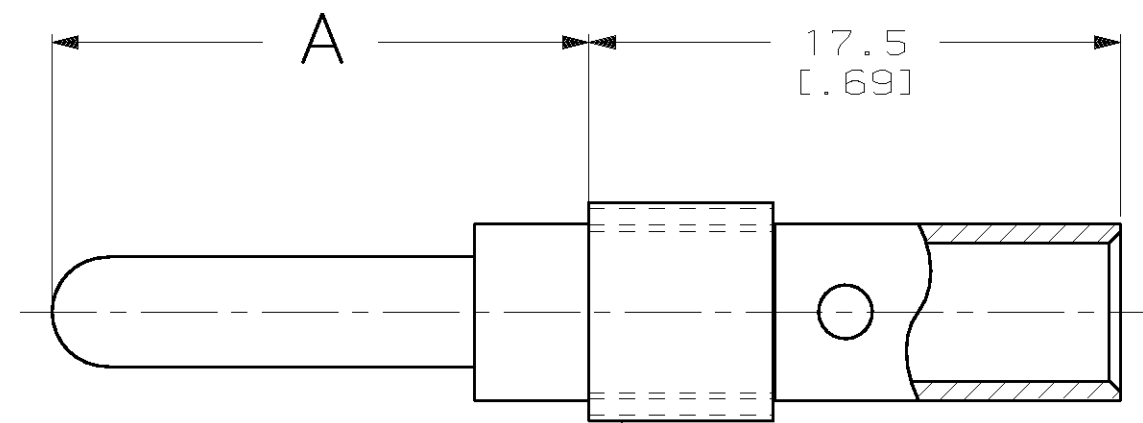

RETENTION CLIP  
MATERIAL: STAINLESS STEEL

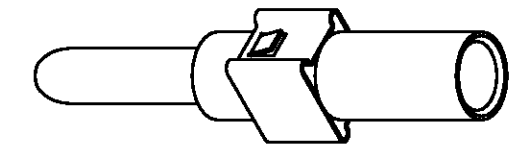

OBSOLETE  
OBSOLETE

5	15.7 [.62]	193991-4
5	25.4 [1.00]	193991-3
2	15.7 [.62]	193991-2
2	25.4 [1.00]	193991-1

FINISH A PART NO

DO NOT SCALE PRINT. UNLESS SPECIFIED DIMENSIONS IN mm [INCHES] TOLERANCES ON: 2 PLC DEC ± - 3 PLC DEC ± - ANGLES ± -		DR 04-13-94 D.A.P.	<b>AMP</b> AMP Incorporated Harrisburg, PA 17105-3608	
MATERIAL 1		CHK -		
FINISH 2 5		APPD -	NAME PIN ASSEMBLY, TYPE XII HIGH CURRENT #8 AWG	
		APPD -	SIZE B	CAGE CODE 00779
		PRODUCT SPEC -	DRAWING NO C-193991	
		APPLICATION SPEC -	SCALE	SHEET 1 OF 1
		WEIGHT -		

THIS DRAWING IS A CONTROLLED DOCUMENT FOR AMP INCORPORATED. IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.