

## OMNIMATE Power - series WGK WGK 10 VP GN/YE BX

**Weidmüller Interface GmbH & Co. KG**  
Klingenbergstraße 16  
D-32758 Detmold  
Germany  
Fon: +49 5231 14-0  
Fax: +49 5231 14-292083  
www.weidmueller.com



The V versions of the WGK feed-through terminals with an insulated housing and clamping yoke connections on the external side, and a solder connection on the internal side for use in encapsulated devices (e.g. EMC filters).

### General ordering data

|              |   |
|--------------|---|
| Type         | WGK 10 VP GN/YE BX  |
| Order No.    | <a href="#">2439430000</a>  |
| Version      | OMNIMATE Power - series WGK, Feedthrough terminal, Rated cross-section: 10 mm <sup>2</sup> , Wemid (PA), Feed-through (bushing) |
| GTIN (EAN)   | 4050118468069   |
| Qty.         | 50 pc(s).   |
| Product data | IEC: 500 V / 57 A / 0.5 - 16 mm <sup>2</sup><br>UL: 300 V / 65 A / AWG 24 - AWG 6   |
| Packaging    | Box   |

**OMNIMATE Power - series WGK  
WGK 10 VP GN/YE BX**

**Weidmüller Interface GmbH & Co. KG**  
Klingenbergstraße 16  
D-32758 Detmold  
Germany  
Fon: +49 5231 14-0  
Fax: +49 5231 14-292083  
www.weidmueller.com

**Technical data**
**Dimensions and weights**

Net weight 13 g

**System parameters**

|                            |                             |  |                           |
|----------------------------|-----------------------------|--|---------------------------|
| Product family             | OMNIMATE Power - series WGK | Wire connection method                     | Screw / solder connection |
| Conductor outlet direction | 180°                        | Fitted by customer                         | No                        |
| Screwdriver blade          | 0.8 x 4.0                   | Tightening torque, min.                    | 5 Nm                      |
| Tightening torque, max.    | 7 Nm                        | Clamping screw                             | M 4                       |
| Stripping length           | 11 mm                       | Touch-safe protection acc. to DIN VDE 0470 | IP 20                     |

**Material data**

|                                       |               |                                       |                |
|---------------------------------------|---------------|---------------------------------------|----------------|
| Insulating material                   | Wemid (PA)    | Colour                                | green / yellow |
| Colour chart (similar)                | Not specified | UL 94 flammability rating             | V-0            |
| Contact material                      | E-Cu          | Contact surface                       | tinned         |
| Storage temperature, min.             | -25 °C        | Storage temperature, max.             | 55 °C          |
| Max. relative humidity during storage | 80 %          | Operating temperature, min.           | -50 °C         |
| Operating temperature, max.           | 120 °C        | Temperature range, installation, min. | -25 °C         |
| Temperature range, installation, max. | 120 °C        |                                       |                |

**Conductors suitable for connection**

|   |                     |   |                    |
|---|---------------------|---|--------------------|
| Clamping range, min.                      | 0.5 mm <sup>2</sup> | Clamping range, max.                      | 16 mm <sup>2</sup> |
| Wire connection cross section AWG, min.   | AWG 24              | Wire connection cross section AWG, max.   | AWG 6              |
| Solid, min. H05(07) V-U                   | 0.5 mm <sup>2</sup> | Solid, max. H05(07) V-U                   | 16 mm <sup>2</sup> |
| Stranded, min. H07V-R                     | 10 mm <sup>2</sup>  | Stranded, max. H07V-R                     | 16 mm <sup>2</sup> |
| Flexible, min. H05(07) V-K                | 0.5 mm <sup>2</sup> | Flexible, max. H05(07) V-K                | 10 mm <sup>2</sup> |
| w. wire end ferrule, DIN 46228 pt 1, min. | 0.5 mm <sup>2</sup> | w. wire end ferrule, DIN 46228 pt 1, max. | 10 mm <sup>2</sup> |

**Rated data acc. to IEC**

|   |                        |  |       |
|---|------------------------|--|-------|
| tested acc. to standard   | IEC 60664-1, IEC 61984 | Rated current, min. no. of poles (Tu=20°C)                     | 57 A  |
| Rated current, max. no. of poles (Tu=20°C)                                | 57 A                   | Rated voltage for surge voltage class / pollution degree III/3 | 500 V |
| Rated impulse voltage for surge voltage class/ contamination degree III/3 | 6 kV                   |  |       |

**Rated data acc. to CSA**

|                               |        |                               |       |
|-------------------------------|--------|-------------------------------|-------|
| Rated voltage (Use group B)   | 300 V  | Rated voltage (Use group C)   | 300 V |
| Rated voltage (use group D)   | 300 V  | Rated current (use group B)   | 65 A  |
| Rated current (use group C)   | 65 A   | Rated current (use group D)   | 10 A  |
| Wire cross-section, AWG, min. | AWG 24 | Wire cross-section, AWG, max. | AWG 6 |

**OMNIMATE Power - series WGK  
WGK 10 VP GN/YE BX**

**Weidmüller Interface GmbH & Co. KG**  
Klingenbergstraße 16  
D-32758 Detmold  
Germany  
Fon: +49 5231 14-0  
Fax: +49 5231 14-292083  
www.weidmueller.com

**Technical data**

**Rated data acc. to UL 1059**

Institute (cURus)



Certificate No. (cURus)

E60693

|                               |  |                               |       |
|-------------------------------|--|-------------------------------|-------|
| Rated voltage (use group B)   | 300 V  | Rated voltage (use group C)   | 300 V |
| Rated voltage (use group D)   | 300 V  | Rated current (use group B)   | 65 A  |
| Rated current (use group C)   | 65 A   | Rated current (use group D)   | 10 A  |
| Wire cross-section, AWG, min. | AWG 24   | Wire cross-section, AWG, max. | AWG 6 |
| Reference to approval values  | Specifications are maximum values, details - see approval certificate. |                               |       |

**Classifications**

|            |             |            |             |
|------------|-------------|------------|-------------|
| ETIM 6.0   | EC001283    | eClass 6.2 | 27-14-11-34 |
| eClass 9.1 | 27-14-11-34 |            |             |

**Notes**

Notes

- Clearance and creepage distances to other components must be devised in accordance with the relevant application standard. This can be achieved in the device by full encapsulation or by the use of additional spacer plates.
- Rated data refer only to the component itself. Clearance and creepage distances to other components are to be designed in accordance with the relevant application standards.
- Colours: SW = black; GN/YL = green/yellow; GY = grey
- Additional colours on request
- WGK: Rated voltage plastic walls: 1 - 4 mm = 500 V; metal walls: 1 - 2.5 mm = 400 V; metal walls: 2.5 - 4 mm = 250 V

**Approvals**

Approvals



ROHS Conform

**Downloads**


|   |   |
|---|---|
| Approval/Certificate/Document of Conformity | <a href="#">Declaration of the Manufacturer</a>   |
| Brochure/Catalogue                          | <a href="#">FL DRIVES EN</a><br><a href="#">MB DEVICE MANUF. EN</a><br><a href="#">FL DRIVES DE</a><br><a href="#">FL_BASE_STATION_EN</a><br><a href="#">FL ELEVATOR EN</a><br><a href="#">FL POWER SUPPLY EN</a><br><a href="#">FL 72H SAMPLE SER EN</a><br><a href="#">PO OMNIMATE EN</a> |
| Engineering Data                            | <a href="#">STEP</a>  |

**OMNIMATE Power - series WGK  
WGK 10 VP GN/YE BX**

**Weidmüller Interface GmbH & Co. KG**  
Klingenbergstraße 16  
D-32758 Detmold  
Germany  
Fon: +49 5231 14-0  
Fax: +49 5231 14-292083  
www.weidmueller.com

**Drawings**

**Dimensional drawing**

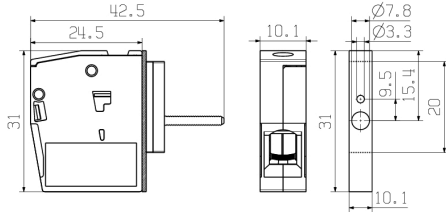

WGK 10 VP...

**Graph**

