


# HC-B 10-TMQ-52/M1PG16S

Order No.: 1771273

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1771273>

Sleeve housing, with double locking latch, height 52 mm, with screw connection, 1x Pg16, lateral cable entry

**Commercial data**

GTIN (EAN)	 4 017918 036010
sales group	D002
Pack	10 pcs.
Customs tariff	85389099
Catalog page information	Page 486 (PC-2009)

**Product notes**

WEEE/RoHS-compliant since:  
02/24/2006



<http://www.download.phoenixcontact.com>  
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

**Technical data****General data**

Note	For contact inserts HC-B10, BB18, DD42, M, K8/24
Design	B10
Height	52 mm
Width	43 mm
Length	73 mm

Housing type	Sleeve housings
Locking type	With double locking latch
Cable exit	Lateral
Type of the screw connection	1x Pg16
Pg screw connection	With
Wrench size, union nut	22 mm
External cable diameter	7.5 mm ... 15 mm
Degree of protection	IP65
Ambient temperature (operation)	-40 °C ... 125 °C
Housing material	Aluminum, die-cast
Housing surface material	Powder-coated, gray
Cable gland material	Nickel-plated brass
Cable seal material	NBR
Material lock	High-grade steel, handle: PA-GF
Material grip body interlock	PA-GF

### Certificates / Approvals




Certification

GOST

### Diagrams/Drawings

Dimensioned drawing

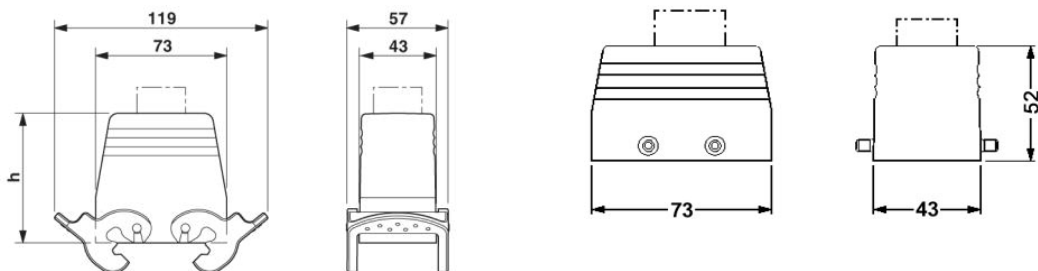

**Address**

PHOENIX CONTACT Deutschland GmbH  
Flachmarktstr. 8  
32825 Blomberg, Germany  
Phone +49 5235 3 12000  
Fax +49 5235 3 41200  
<http://www.phoenixcontact.de>



© 2010 Phoenix Contact  
Technical modifications reserved;