

INTERCONNECTS

SERIES 329, 380, 429, 480 • .100" GRID SOLDER CUP HEADERS AND SOCKETS • SINGLE AND DOUBLE ROW STRIPS

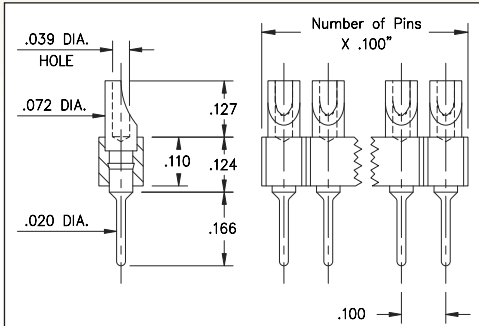


FIG. 1

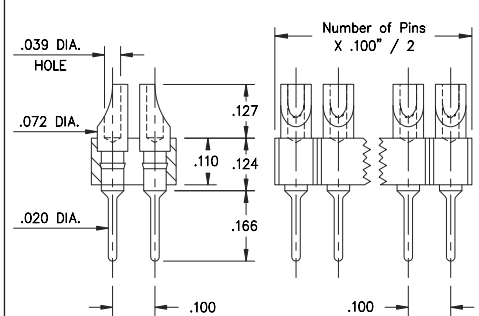


FIG. 2

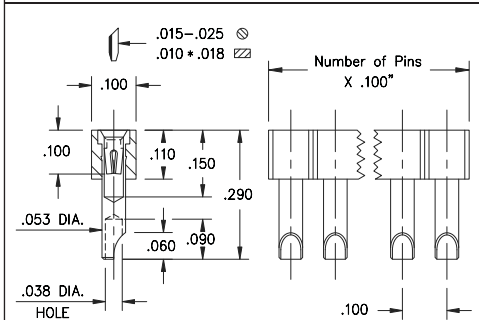


FIG. 3

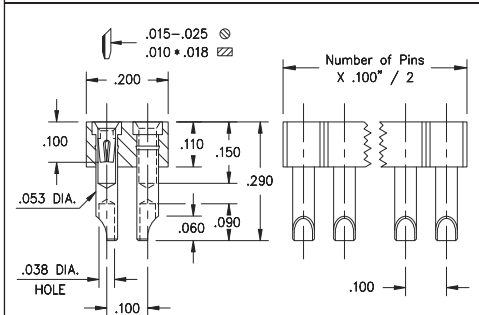
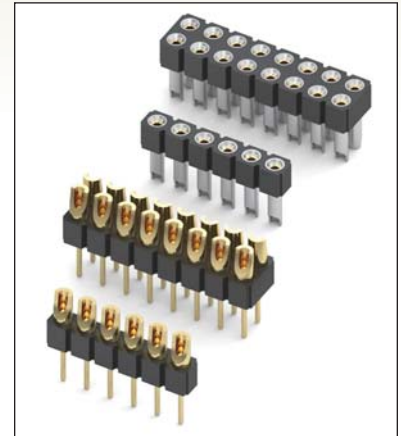


FIG. 4

- Series 380 & 480 use MM #8000 pins. See page 216 for details
- Series 329 & 429 use MM #2954 receptacles and accept pin diameters from .015"-.025". See page 171 for details
- Series 329 & 429 receptacles use Hi-Rel, 4-finger BeCu #30 contact rated at 3 amps. See page 253 for details
- Soldercups are pre-aligned
- Insulators are high temperature thermoplastic, suitable for all soldering operations



ORDERING INFORMATION
















FIG. 1	Series 380...001	Single Row Solder Cup / Solder Tail		
		380-XX-1	-00-001000	
	Specify number of pins		01-64	
FIG. 2	Series 480...001	Double Row Solder Cup / Solder Tail		
		480-10-2	-00-001000	
	Specify number of pins		02-64	
  				
SPECIFY PLATING CODE XX=		10 	90	40 
Pin Plating 		10 μ" Au	200 μ" Sn/Pb	200 μ" Sn

FIG. 3	Series 329...540	Single Row Solder Cup Sockets				
		329-XX-1	-41-540000			
	Specify number of pins		01-64			
FIG. 4	Series 429...540	Double Row Solder Cup Sockets				
		429-XX-2	-41-540000			
	Specify number of pins		02-64			
  						
SPECIFY PLATING CODE XX=		11 	13 		41 	43 
Sleeve (Pin) 		10 μ" Au	10 μ" Au		200 μ" Sn	200 μ" Sn
Contact (Clip) 		10 μ" Au	30 μ" Au		10 μ" Au	30 μ" Au

