
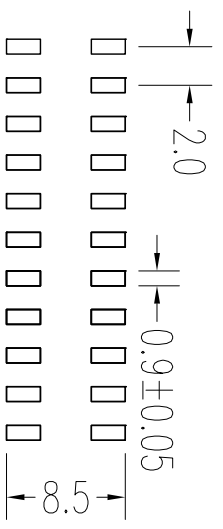

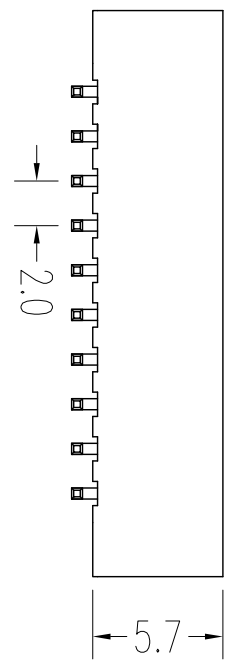



REV.	DESCRIPTION	DATE
A	RELEASE	2012.11.12

**NOTES:**

- Insulator Material: Nylon-6T, UL 94V-0
- Contact Plating: TIN, 80-100µ"
- Contact Material: Brass
- Current Rating : 1A AC,DC
- Contact Resistance: 20MΩ Max.
- Dielectric Withstanding: AC 500V
- Insulator Resistance: 1000MΩ Min.
- Operating Temp.: -40°C~+105°C

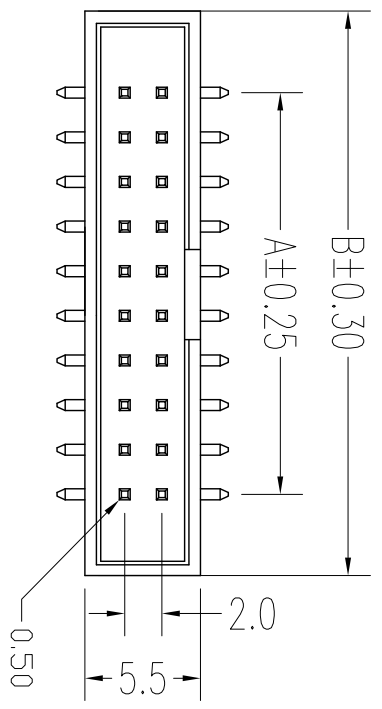

**PCB LAYOUT**



NUMBER OF POSITIONS	DIMENSION	
	A	B
06	4.00	11.20
08	6.00	13.20
10	8.00	15.20
12	10.00	17.20
14	12.00	19.20
16	14.00	21.20
18	16.00	23.30
20	18.00	25.20
24	22.00	29.20
26	24.00	31.20
30	28.00	35.20
34	32.00	39.20
40	38.00	45.20
44	42.00	49.20
50	48.00	55.20
60	58.00	65.20
64	62.00	69.20

**CnC Tech,LLC**

Port NO.: 3120-XX-0300-99

UNLESS TOLERANCE		DRAW		BY	
GENERAL	ANGLE	DESIGN	CHECK	APPROVE	BY
X. ± 0.30	X.° ± 3.0°	BY	BY	BY	
.X ± 0.20	.X° ± 2.0°				
.XX ± 0.15	.XX° ± 1.0°				
.XXX ± 0.08	.XXX ± 0.5°				



SCALE	SHEET	UNIT
1:1	1/1	MM

DRAW NO.:	REV.:
3120-XX-0300-99	A