

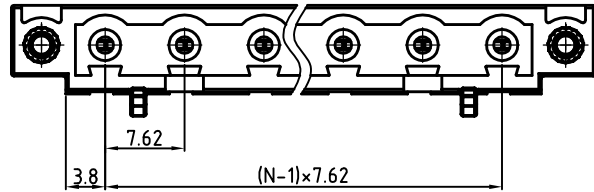


SIGN	DATE	DESCRIPTION	APPROVER
		THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!	

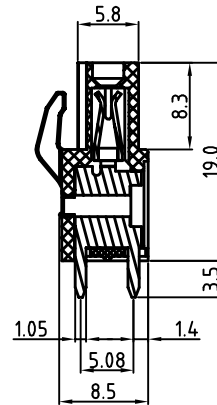

N=Number of poles

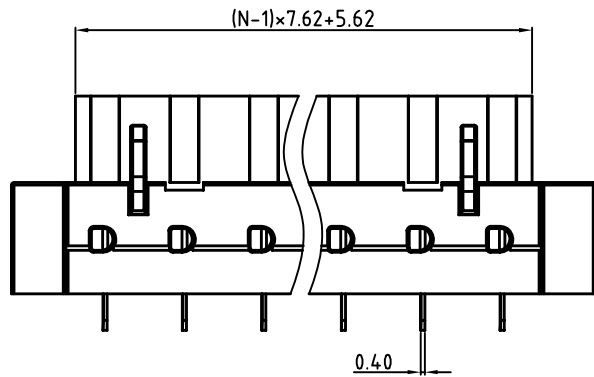

Material

- Wire guard: PhBz(CuSn)
- Surface of solder tail: Tin plated
- With Flange Nut Brass M2.5
- Insulator (housing): Thermoplastic (UL94V-0)

Electrical

- Voltage rating: 300VAC
- Current rating: 10A
- Withstanding Voltage: 1.6kv
- Operating temperature: -30°C to +105°C
- Soldering temperature: 250°C±10°C/5 Sec
- Safety Approval: us

RoHS Compliant


PART NUMBER:

OSTV7XX0250

No. of Poles
 02 2 Pole
 03 3 Pole

 16 16 Pole

COLOR
 0: Black
 5: Green (Standard)
 6: Blue
 8: Light Grey

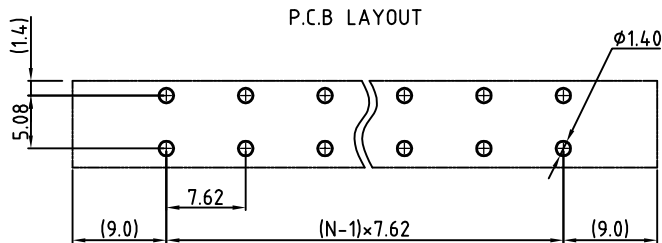

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ON-SHORE TECHNOLOGY, INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ON-SHORE TECHNOLOGY, INC.



TITLE		OSTV7 7.62mm Series W/F 180° Vertical 2p-16p				
PART NO.		OSTV7XX0250		DWG NO.		OSTV7XX0250.DWG
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.		
Shi Jun 2006.11.11	Shi Jun 2006.11.11	Tason 2006.08.04	Tason 2006.08.04			
					UNIT: mm	Tolerance
					SCALE: 0.2500	X.X ±0.5
				SHEET: 01/01	REV.: C	X.XX ±0.1
						X° ±1°